




Quadro HO

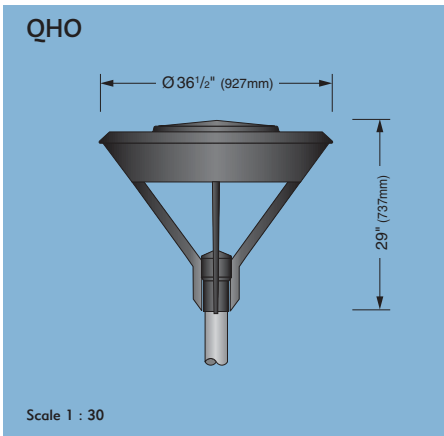

Construction

- Die-cast and spun aluminum components
- Precision anodized reflectors
- Stainless steel fasteners
- Completely sealed optic chamber

Lamping/Optics

- H.I.D. lamping 50w to 400w
- Cutoff and Full Cutoff classifications
- Type II and V distributions

Design Options

- Choice of flat or sag glass

Finish

- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

Certifications

- UL and ULC listed
- ASTM and PCI for finish



Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

Series | QHO Quadro HO

Reflector | R2 Type II Aluminum reflector | R5 Type V Aluminum reflector

Mounting | 1 Single

Lamping MH | H100 100w | H150 150w | H175 175w | H250 250w | H400 400w

Lamping HPS | S100 100w | S150 150w | S200 200w | S250 200w | S400 400w

Voltage | 120 | 208 | 240 | 277 | 347

Finish | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

[CLICK HERE FOR POLE INFO.](#) [CLICK HERE FOR LAMP INFO.](#)

Photometry

