





Sonne

se'lux®

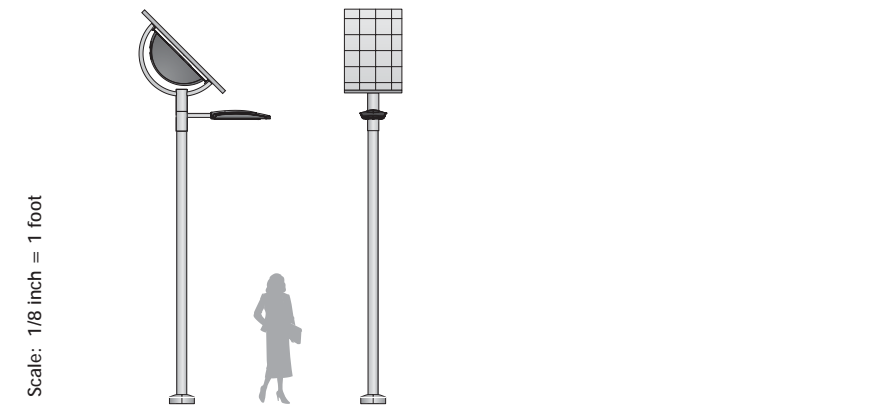

- Construction/Assembly**
- 20 year warranted photovoltaic panels especially designed for solar lighting
 - Fixture and battery compartment of molded recycled ABS w/UV protection
 - Marine grade, sealed gel batteries with single or double solar panels up to 250w
 - "Smart Controller" technology allows regulation of light operation in relation to daylight hours for any region in US
- Lamping/Optics**
- Up to 32w compact fluorescent
 - Type III distr. / Full Cutoff classification
- Finish**
- Multi-step cleaning and sealing process
 - High quality polyester powder coat finish (CLICK HERE FOR DETAILS)
- Certifications**
- UL and ULC listed
 - ASTM and PCI for finish

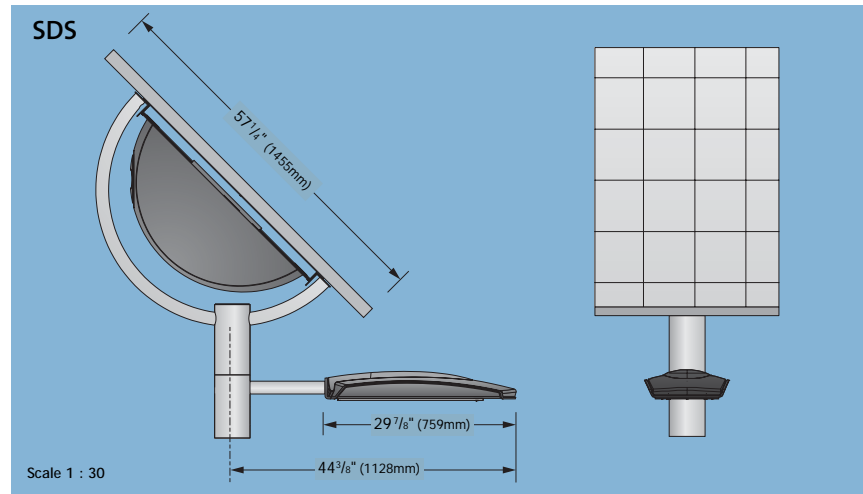

Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

Series | SDS Sonne

Lamping Compact Fluorescent | F18 18w | F26 26w | F32 32w

Reflector | R3 Type III Aluminum Reflector

Batteries | B1 1 x 12V 82 amp hour | B2 2 x 12V 82 amp hour | B3 1 x 12V 100 amp hour | B4 2 x 12V 100 amp hour

Panel | P1 80W (single panel) | P2 125W (single panel) | P3 160W (double panel) | P4 250W (double panel)

Finish | BK Black | WH White | BZ Bronze | SV Silver | GV Galvanized | SP Specify RAL#

Panel Mounting Angle Option* | PM0 0° | PM1 15° | PM3 30°

Options | MD Motion Detector | VR Vandal Resistant Fasteners supplied with all covers

* Standard Mounting Angle is 45°

CLICK HERE FOR LAMP INFO.

Photometry

SDS-F32-R3 (Type III Full Cutoff/mounting ht. = 16')

