

Quadro 2

se'lux®



Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

Series | QD2 Quadro 2

Shielding | **SP** Type V Silver Louver | **WP** Type V White Louver | **MR** Type V MTR 150 Refractor

Mounting | **1** Single | **2** Double | **W** Wall Mount

Lamping MH | **H050*** 50w | **H070** 70w | **H100** 100w

Lamping HPS | **S050*** 50w | **S070** 70w | **S100** 100w

Voltage | **120** | **208** | **240** | **277** | **347**

Finish | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

Options | **HS** House Side Shield (180°)


* Only available in 120v and 277v

[CLICK HERE FOR POLE INFO.](#) [CLICK HERE FOR MOUNTING ARM INFO.](#) [CLICK HERE FOR LAMP INFO.](#)


Photometry

Shielding Options

QD2-SP-1-H100 (Type V Semi-Cutoff/mounting ht. = 16')

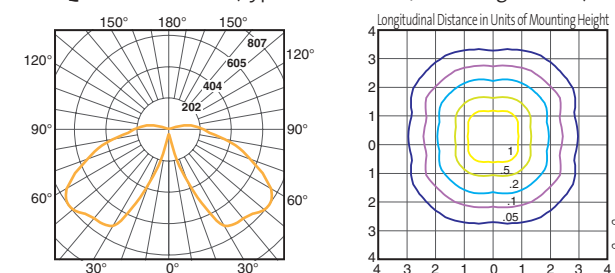

QD2-MR-1-H100 (Type V Semi-Cutoff/mounting ht. = 16')

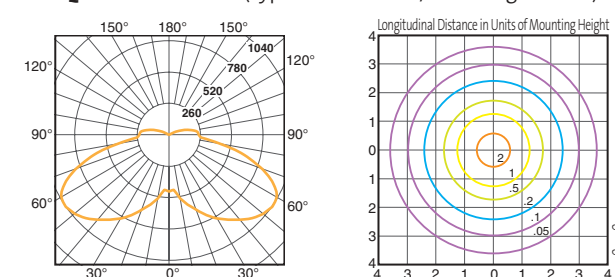

Silver Louver (SP) - Type V Semi-Cutoff

- "Dark Light" effect offers Superior Visual Comfort
- H100. Max Candela = 807 at 55° from vertical



White Louver (WP) - Type V Semi-Cutoff

- Brightness Control with Subtle Source Luminance
- H100. Max Candela = 874 at 55° from vertical




MTR 150 (MR) - Type V Semi-Cutoff

- Minimum Intensity at Critical Viewing Angles
- H100. Max Candela = 1040 at 55° from vertical

For more options, see our website at www.selux.com/usa

QD2-xx-1



Scale 1 : 30

Construction

- Die-cast and formed aluminum components
- One-piece UV-stabilized polycarbonate globe
- Stainless steel fasteners
- Sealed optic chamber

Lamping/Optics

- H.I.D. lamping 50w to 100w
- Three refractor options
- Type V distribution
- Semi-Cutoff classification

Design Options

- Single, double or wall mount

Finish

- Multi-step cleaning and sealing process, high quality polyester powder coat finish ([CLICK HERE FOR DETAILS](#))

Certifications

- UL and ULC listed
- IP 54
- ASTM and PCI for finish