



Saturn Bollard



se'lux®

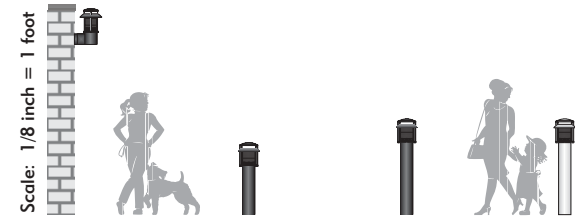

- Construction**
- Die-cast and extruded aluminum components w/stainless steel fasteners
 - Completely sealed optic chamber
- Lamping/Optics**
- H.I.D. and compact fluorescent lamping
 - Choice of 5 refractor options
- Finish**
- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)
- Certifications**
- UL and ULC listed
 - IP 54
 - ASTM and PCI for finish

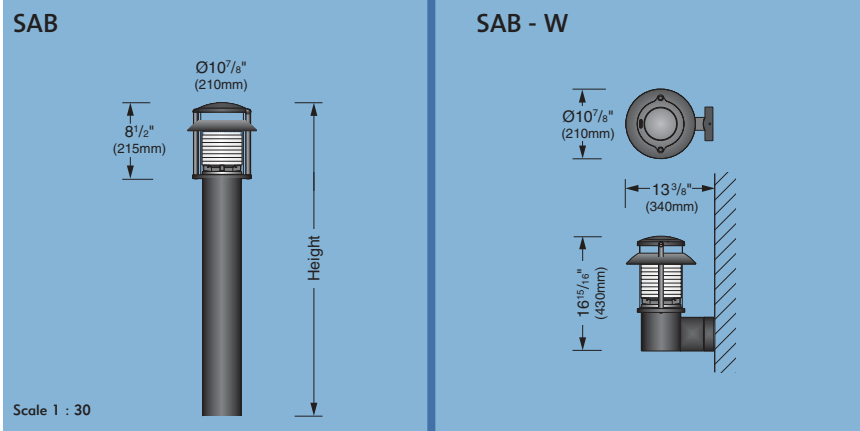

Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)


- Series** | **SAB** Saturn Bollard
- Shielding** | **SP** Type V Silver Louver | **WP** Type V White Louver | **MR** Type V MTR 150 Refractor
- | **B3** Type III Borosilicate Glass Refractor | **B5** Type V Borosilicate Glass Refractor
- Mounting Height** | **2** Two Feet | **3** Three Feet | **4** Four Feet | **W** Wall Mount | or Specify Custom Height
- Lamping MH** | **H050*** 50w | **H070** 70w || **Lamping HPS** | **S050*** 50w | **S070** 70w
- Lamping Compact Fluorescent** | **F32**** 32w | **F42**** 42w
- Finish** | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#
- Voltage** | **120** | **277** | **347**
- Options** | **HS** House Side Shield (180°)

* Only available in 120v and 277v **Not available in 208v or 240v

[CLICK HERE FOR LAMP INFO.](#)

Photometry

Shielding Options

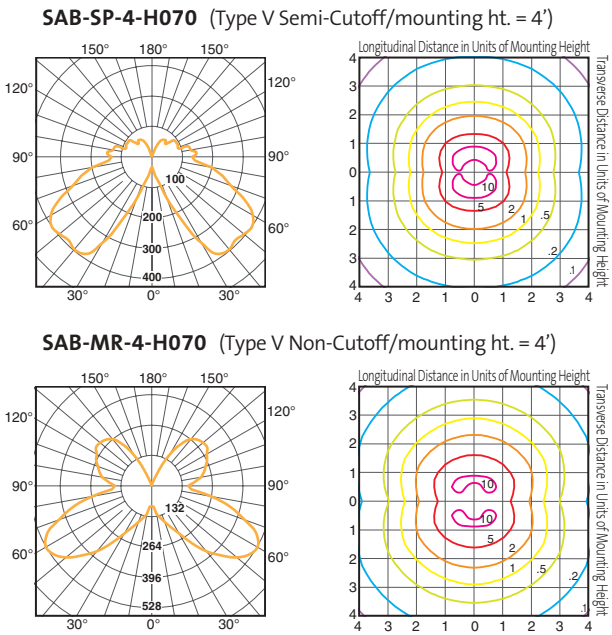

- Silver Louver (SP) - Type V Semi-Cutoff**
- "Dark Light" effect offers superior visual comfort
 - H100. Max Candela = 400 at 55° from vertical
- White Louver (WP) - Type V Semi-Cutoff**
- Brightness Control with subtle source luminance
 - H100 Max. Candela = 416 at 60° from vertical
- MTR 150 (MR) - Type V Semi-Cutoff**
- Minimum intensity at critical viewing angles
 - H100 Max. Candela = 528 at 60° from vertical
- Borosilicate Glass Refractor (B3) - Type III Non-Cutoff**
- High efficiency for maximum spacing applications
 - H100 Max. Candela = 538 at 85° from vertical
- Borosilicate Glass Refractor (B5) - Type V Non-Cutoff**
- High efficiency for maximum spacing applications
 - H100 Max. Candela = 448 at 85° from vertical

For more options, see our website at www.selux.com/usa