

DuraPak™

"The Quiet Solution"
DP130-HD




DuraPak™130-HD Compactor delivers exceptional quality and power while running more quietly than similar models. Designed for high-rise applications, DuraPak™ machines are ideal choices for hotels, hospitals, apartment and office buildings. For use with compaction cans.

Standard Features

- Remote Power Unit
- "UL" Listed Electrical Components
- 5 HP Motor 208/230 3PH
- Photo Electric Eye With Time Delay
- Automatic Cycle
- Mushroom Stop Button
- On/Off Key Switch
- Interlocked Side Access Door with Automatic Shut-Off
- Night Shut Down
- Programmable Logic Control (PLC)
- Ratchet Turnbuckle Hook-Up
- Soft Shift Single Solenoid Valve
- Replaceable Low Friction, Noise Reducing Wear Pads
- Hinged Steel Wiper Blade
- On Light
- Container Full Light
- Oil Pressure Gauge
- Excessive Run Timer

Typical Compactor Room

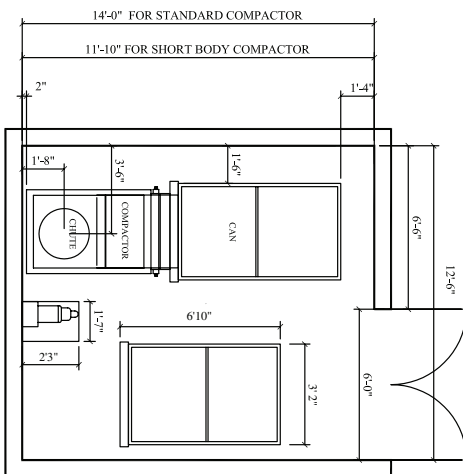

Options

- 110 V Single Phase Motor
- 460/480V 3PH
- Access Door on Both Sides
- Rear or Front Loading Containers
- Odor Control System
- Hopper Sound Deadening Package
- Short Body DuraPak 130-HD
- Single Side Container Hook Up

HYDRAULICS

Cylinder	4" x 2" DIA
Cylinder Stroke	32"
Pump	4 GPM
Valve	Single Solenoid Soft Shift
Oil Reservoir	14 GAL
Cycle Time	45 SEC
Normal Pressure	1600 PSI
Max. Pressure	2400 PSI
Normal Force	20,100 LBS
Max. Force	30,100 LBS

RAM

Top Plates	1/4"
Sides	1/4"
Floor	3/8"
Face Plate	3/8"
Hinged Steel Wiper	4" x 1/4"
Replaceable Wear Pads	YES

COMPACTOR FRAME

MFR's Rating	.25
Clear Top Opening	27" x 24"
Capacity Per Hour	20 cu. yds.
Floor (1/4" + 1/4" Wear Plate)	1/2"
Breaker Bar	4" x 3" x 1/2"
Side Plates	1/4"
Hopper Sides & Front	11 GA.
Hopper Impact Plate	1/4"
Ratchet Turnbuckle Cap.	38,000 lbs
Weight w/o Power Unit	1550 lbs
Compaction Chamber	27 1/4"Wx19 1/2"Hx22 1/2"L
Machine Dimensions	29"W x 68"H x 72"L

ELECTRICAL

Motor (TEFC)*	5HP
"UL" Listed Elec. Components	YES
Power	208/230 3 Phase
NEMA Type Fuse	YES
Photo Electric Eye	YES
Amperage	208V/3PH = 15.4

*Totally Enclosed Fan Cooled

4400 Austin Lane, White Plains, MD 20695 | 866.DURAPAK (866.387.2725) | 301.753.4100 | FAX 301.753.4109 | www.durapak.org | email: info@chutes.com

DuraPak™
130-HD

Loaded With Extras
At Standard Prices!

www.chutes.com | 1.800.882.4883

Manufactured by DuraPak. DuraPak offers a Continuous Improvement Program. It reserves the right to implement improvements to the items here-in without prior notice. © 2008 DuraPak.

DuraBagger™

DB-100




DuraBagger™DB-100 Compactor delivers exceptional quality and power while running more quietly than similar models. Designed for high-rise applications, DuraBagger™ machines are ideal choices for hotels, hospitals, apartment and office buildings. For use with tubular compactor bags.

Standard Features

- Remote Power Unit
- "UL" Listed Electrical Components
- 7 1/2 HP Motor 208/230 3PH
- Photo Electric Eye With Time Delay
- Automatic Cycle
- Mushroom Stop Button
- On/Off Key Switch
- Interlocked Front Access Door with Automatic Shut-Off
- Night Shut Down
- Programmable Logic Control (PLC)
- Soft Shift Single Solenoid Valve
- On Light
- Full Bag Shut Off Switch
- Oil Pressure Gauge
- Excessive Run Timer
- RAM Retract Push Button
- Bag Hold Down Arm

Typical Bagger Room

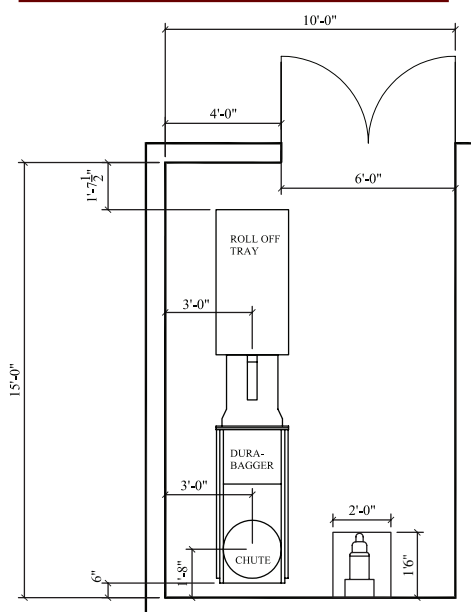

Options

- 110 V Single Phase Motor
- 460/480V 3PH
- Access Door on Both Sides
- 38.5" Tubular Compactor Bags
- Odor Control System
- Hopper Sound Deadening Package
- 5'-0" or 10'-0" Roll Off Tray
- Multi-Sausage Bag Kit w/Wire Ties
- 38" Single Bags

HYDRAULICS

Cylinder	4" x 2 1/4" DIA
Cylinder Stroke	27"
Pump	3.65 GPM
Valve	Single Solenoid Soft Shift
Oil Reservoir	12 GAL
Cycle Time	43 SEC
Pressure	2900 PSI
Force	36,440 LBS
Hydraulic Hose	7 FT

RAM

Top Plates	1/4"
Sides	1/4"
Floor (1/4" + 1/4" Wear Plate)	1/2"
Face Plate	1"
Replaceable Shear Teeth	YES

COMPACTOR FRAME

ANSI Rating	.15 CU YD
Clear Top Opening	20 3/4" x 24"
Capacity Per Hour	12.3 CU YDS
Floor (3/8" + 1/4" Wear Plate)	5/8"
Side Plates	3/8"
Hopper Sides & Front	11 GA.
Hopper Impact Plate	1/4"
Weight w/o Power Unit	1600 LBS
Compaction Chamber	24"x24"x12" = 4 CU FT
Machine Dimensions	34"W x 94"L x 65"H
Snout Bolted w/ Gasket to Body	3/8"

ELECTRICAL

Open, Drip Proof Motor	7 1/2 HP
"UL" Listed Elec. Components	YES
Power	208/230 3 Phase
NEMA Type Fuse	YES
Photo Electric Eye	YES
Amperage	208V = 22.0 A

4400 Austin Lane, White Plains, MD 20695 | 866.DURAPAK (866.387.2725) | 301.753.4100 | FAX 301.753.4109 | www.durapak.org | email: info@chutes.com

DuraBagger™
DB-100

**Loaded With Extras
At Standard Prices!**

www.chutes.com | 1.800.882.4883

Manufactured by DuraBagger. DuraBagger offers a Continuous Improvement Program. It reserves the right to implement improvements to the items here-in without prior notice. © 2008 DuraBagger.