




DL2RZP-1 - Adjustable Zero Sight Line DL2RZP-2 - Adjustable Flange Overlay RECESSED DOWNLIGHT

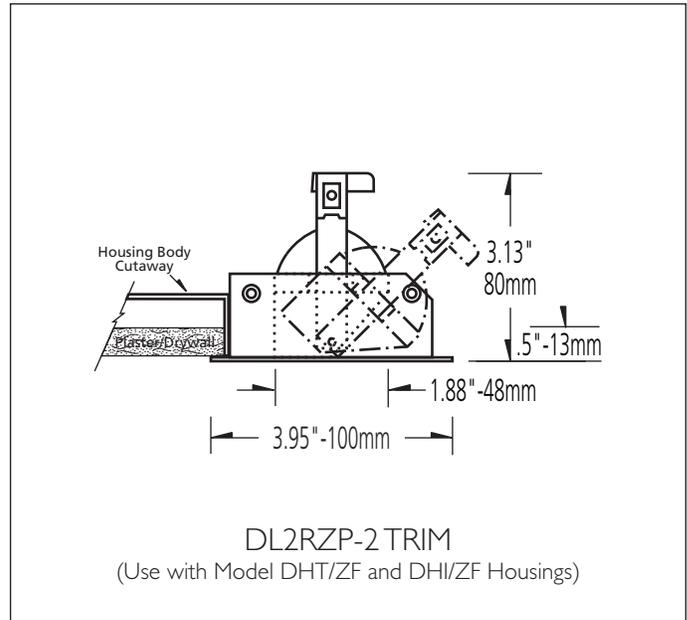

PRODUCT SPECIFICATION

Cat. No.	Finish	
DL2RZP-1W	DL2RZP-2W	Matte White
DL2RZP-1B	DL2RZP-2B	Matte Black
DL2RZP-1C	DL2RZP-2C	Polished Chrome
DL2RZP-1G	DL2RZP-2G	Polished Brass

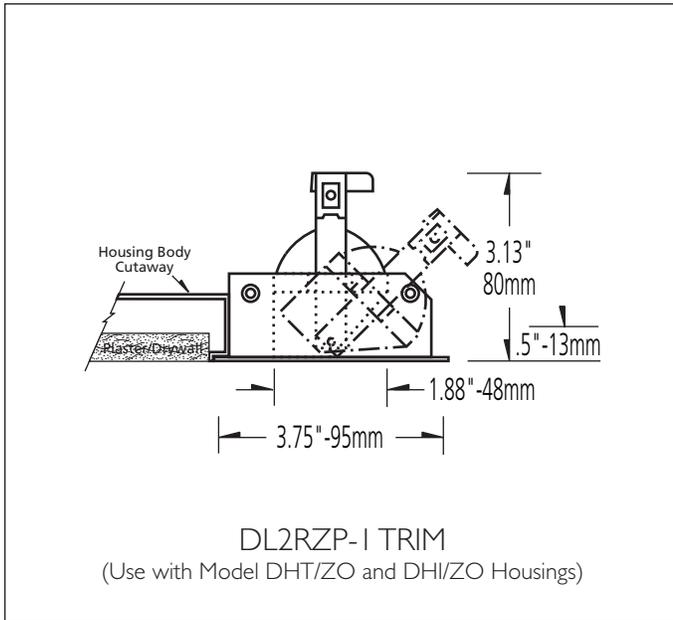

GENERAL DESCRIPTION

Recessed downlight is an adjustable low voltage fixture with **flush trim plate** and **die-cast interior baffle which eliminates aperture flash or glare**. Round opening offers 45° aiming from vertical and is fully rotatable within downlight housing. It is also lockable from below. Lamp holder features registered yoke to allow secure placement of up to three lenses/louvers and includes internal collar to prevent light leaks. Trim is offered in two variations: **Model DL2RZP-1** is for mounting, typically, in plaster or drywall ceilings with plaster stop for zero sight line; **Model DL2RZP-2** is for mounting in drywall ceilings and incorporates standard flush trim with minimal protrusion over ceiling line. Both models use a quartz halogen lamp for superior color rendition and beam control. Frosted glass lens is supplied with fixture.

MOUNTING

Use DL2RZP-1 with DHT/ZO housing and DL2RZP-2 with DHT/ZF housing for non-IC accessible and non-accessible ceilings which do not exceed 1 inch thickness. Housing butterfly brackets can be adjusted by loosening thumb-turn posts within housing to align housing neck with finish ceiling line. Use DL2RZP-1 with DHI/ZO housing and DL2RZP-2 with DHI/ZF housing for insulated, air-tight, accessible or non-accessible ceilings. Hanging bars are included. Model ZOIK drywall installation kit is included with Model DHT/ZO and DHI/ZO. It contains a reinforcing screen for applying joint compound when used in drywall ceilings.

MATERIAL

Trim is constructed of steel. Fixture housings are riveted aluminum.

ACCESSORIES

Trim may be accessorized with Honeycomb Louvre (HCL-2), Spread Glass Lens (SGL-2), Clear Glass Lens (CGL-2), Linear Spread Lens (LSL-2), and Ultra Violet Glass Lens (UVL-2).

LABEL

U.L. Listed trim and housing for dry and damp, non-IC locations. File No. EI 15025.

ELECTRICAL

Trim is pre-wired for use in housing assembly.

TRANSFORMER

DHT/ZO, DHT/ZF, DHI/ZO, and DHI/ZF housings are powered by 120v primary, 12v secondary, integral electronic transformers, (50w maximum), which are dimmable.

LAMP

12v MR-16 halogen lamp, 50w maximum (order separately). Specify lamp beam spread. Consult factory regarding availability of new MR-16 IR energy savings lamp series with 37w rated lamp equivalent to 50w output and 50w rated lamp at or near 65w output.

ENERGY CONSERVATION

Manufacturer recommends use of Osram Sylvania's energy saving 37w Tru-Aim® IR halogen lamps which convert more energy into light than conventional 50w MR-16 lamps. Tru-Aim® IR halogen lamps can be ordered from Lucifer Lighting for use in fixture. See luciferlighting.com for lamp specification guide.

WARRANTY

Manufacturer's one year warranty of product is conditioned on use of manufacturer supplied transformers.

LUCIFER
LIGHTING COMPANY

414 Live Oak Street
San Antonio, Texas 78202
Phone 210 227-7329
FAX 210 227-4967
www.luciferlighting.com

©2004 Lucifer Lighting Company

As part of its policy of continuous research and product development, the Company reserves the right to change or withdraw specifications without prior notice.

0932-1004