



PUKLED™
LPKTF-LED KIT WITH FASTENERS



PRODUCT SPECIFICATION

Cat. No.	Description
LPKTF-LED-1-*	1 Fixture and 1 Non-dimmable Power Supply
LPKTF-LED-2-*	2 Fixtures and 1 Non-dimmable Power Supply

* - Specify A (Clear Anodized Aluminum); B (Black Anodized Aluminum); W (Matte White)

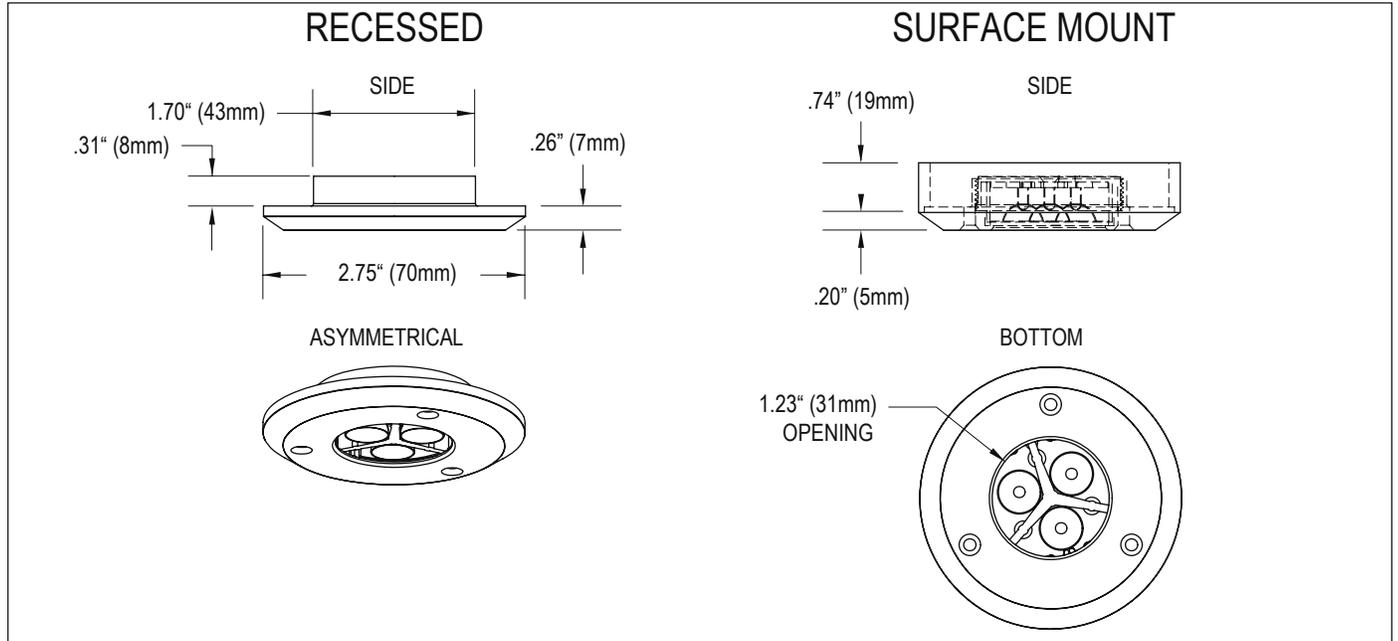

GENERAL DESCRIPTION

Low voltage, small scale, white light LED luminaire *with fasteners* suitable for interior and exterior dry and damp locations. 3300°K standard color temperature, optional cool white 4700°K available. Will accept one effects element in addition to a color gel with a soft focus lens standard. Consult factory for availability of alternate LED colors: Red, Yellow, Green, and Blue. Patent pending.

MOUNTING

May be recessed into a 1.750" (44.45mm) diameter hole in a .75" (19mm) thick panel. #4 Phillips flathead wood screws provided. Surface Mount version available for non-recess applications.

MATERIAL

Fixture body is machined from aluminum alloy.

FINISH

Matte White, Clear Anodized, or Black Anodized.

LABEL

ETL Listed.

ELECTRICAL

350ma, 3.6w fixture is prewired with 18 AWG 10' (3m) lead. Maximum recommended run length is 30 feet with 18 AWG wire (consult factory for custom lengths). Supplied with U.L. Recognized DC power supply mounted remotely in a standard 4 11/16" (119mm) square junction box (included). 120/230v primary, 350ma secondary, 10w maximum.

OPTIONS

Fixture available in ready-to-install kits of 1 or 2 PUKLEDs with non-dimmable power supply as standard. Optional dimmable power supply PSA-LED-350-10-H-DIM available. Compatible only with 0-10v dimmer (not provided).

ACCESSORIES

Trim may be accessorized with one effects device: Clear Glass Lens (CGL-5), Soft Focus Lens (SFL-5), Warm Tone Lens (WTL-5), Spread Glass Lens (SGL-5), and Honeycomb Louvre (HCL-5). Optional color gels can be used in combination with other effects devices. Surface Mount version available for non-recess applications.

LUCIFER
LIGHTING COMPANY

3750 IH35 North
 San Antonio, TX 78219
 Phone: 800 879-9797
 Fax: 210 227-4967
 luciferlighting.com

©2007 Lucifer Lighting Company

As part of its policy of continuous research and product development, the Company reserves the right to change or withdraw specifications without prior notice.