

The right light


LUXO



ELLEN

Design Ark. Ellen Kongshaug


ELLEN

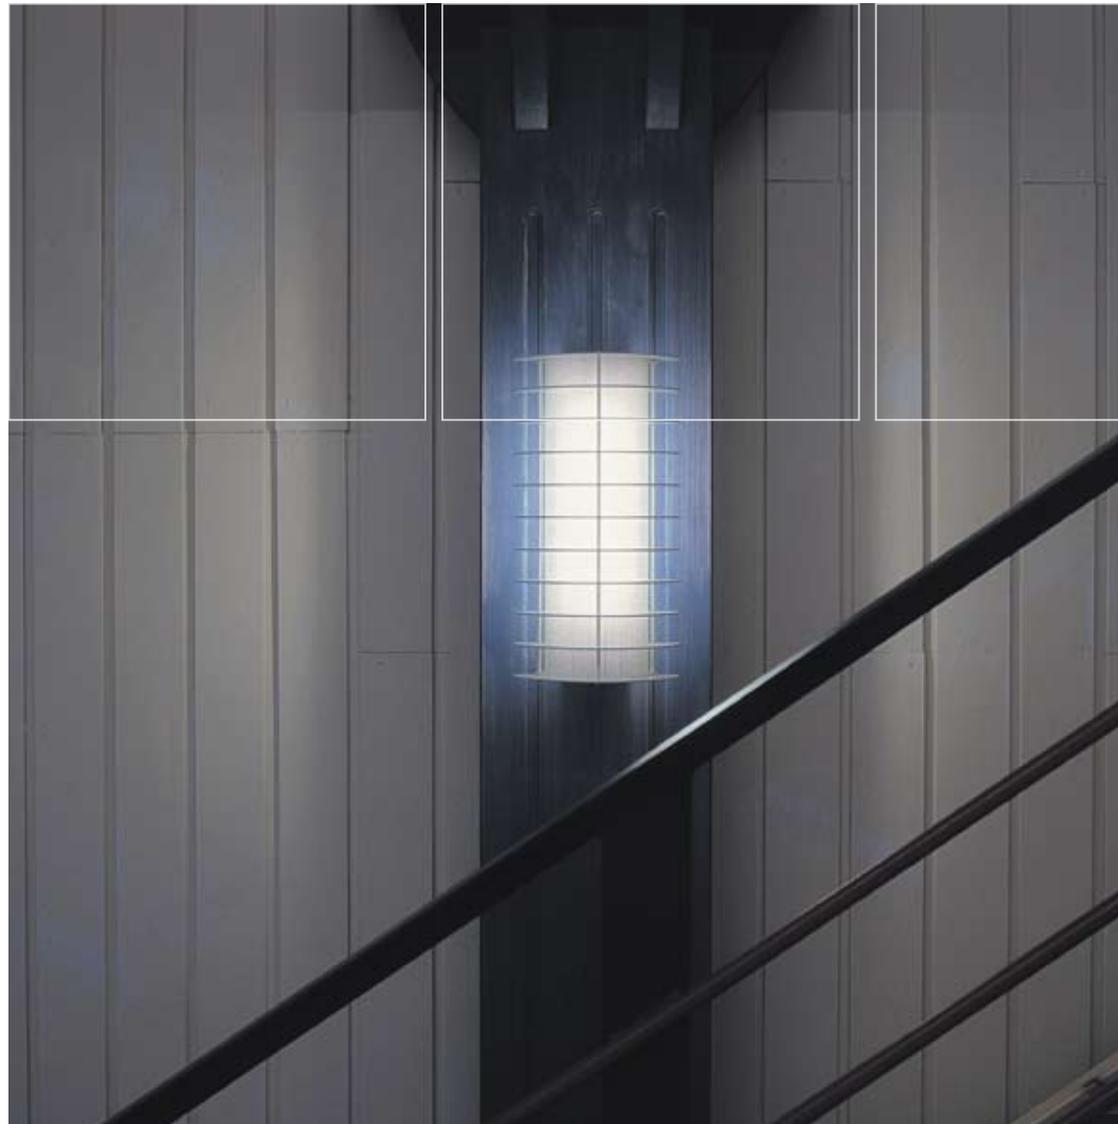



ELLEN

TECHNICAL INFORMATION: Luminaire housing finished in white steel with chrome detailing. Diffuser in opal acrylic or white perforated steel backed by opal acrylic sheet. Semi-circular steel louvers finished in white. Supplied as standard with HF ballast.

6434-113 ELLEN wall luminaire is an excellent choice for corridors, stairways, canteens, etc.

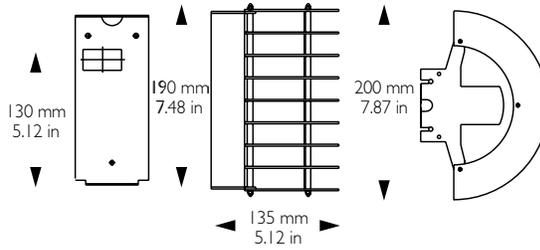

6436-124 ELLEN wall luminaire is an excellent choice for corridors, stairways, canteens, etc.

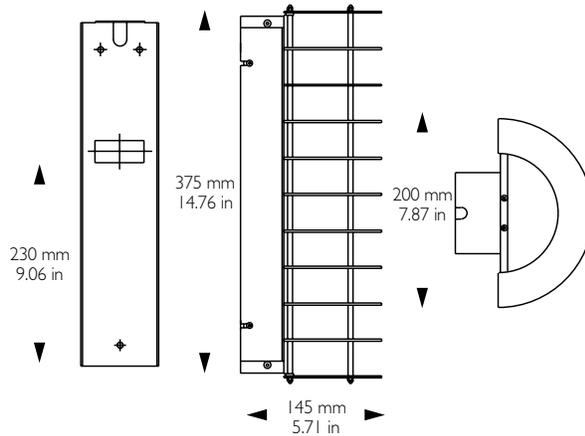

SERIES

ELLEN

CONFIGURATION I

6434: Perforated Steel / Acrylic Diffuser H 190mm / 7.48 in

6436: Long, Perforated steel / Acrylic Diffuser H 375mm / 14.76 in

LAMPING

I13: 1 X 13W CFL Quad *ONLY 6434*

I24: 1 X 24W CFL Biax *ONLY 6436*

BALLAST

EB: Electronic HPF <10% THD

EB

VOLTAGE

UNV: Universal Voltage 120V to 277V

347: 347 Volts

FINISH

WHITE (standard)

SILVER

GREY

BLACK

YELLOW

BLUE GREEN

CREAM

SPECIFICATION SUBMITTAL

Job Name: _____ Job Number: _____

SPECIFIER (ENGINEER/ARCHITECT)

Name: _____