

The right light

LUXO



BRAVO

Design OS 2 INDUSTRIDESIGN AS

L-5

BRAVO
SUSPENSION





BRAVO
WALL






BRAVO

TECHNICAL INFORMATION: Luminaire housing made from extruded aluminum and end caps in moulded aluminum. Standard finish in white or grey. Vacuum metallized aluminum reflector. Pendant luminaire supplied with 2.5 m (98.43 in) connection cord and earthed plug plus 1 m (39.37 in) quickly adjustable wire suspension. Supplied as standard with HF ballast.

3495-228-2 / 3495-254-2 BRAVO: Bravo 3495 is a slim pendant T5 luminaire with indirect light distribution. The luminaire has a reflector that gives a very wide light distribution which means that it can be used for low ceilings in various environments, such as offices, reception areas and schools.

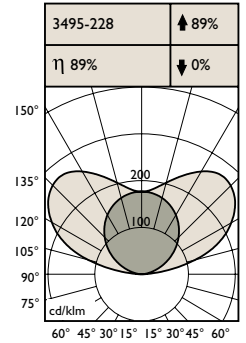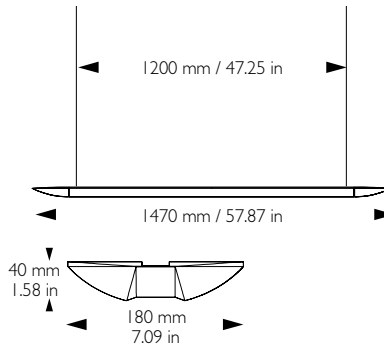

3496-139-2 / 3496-154-2 WALL

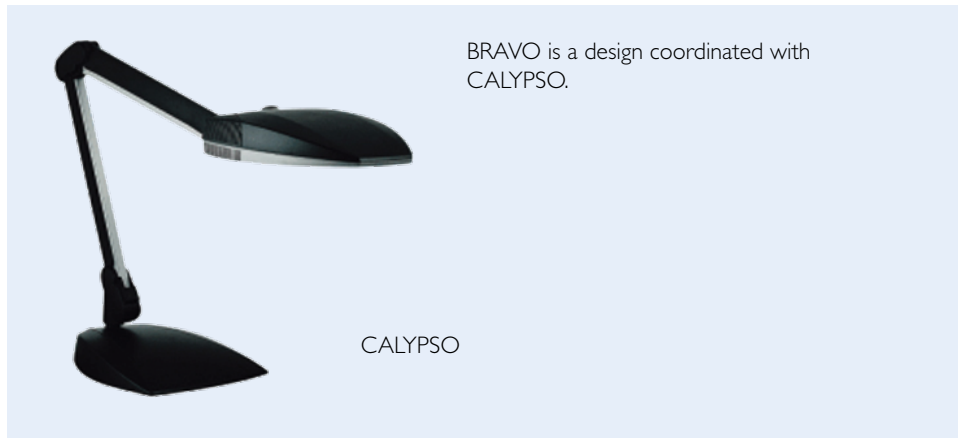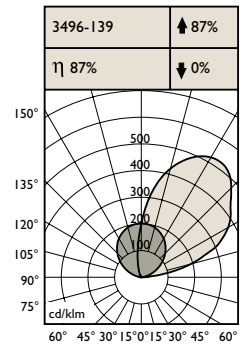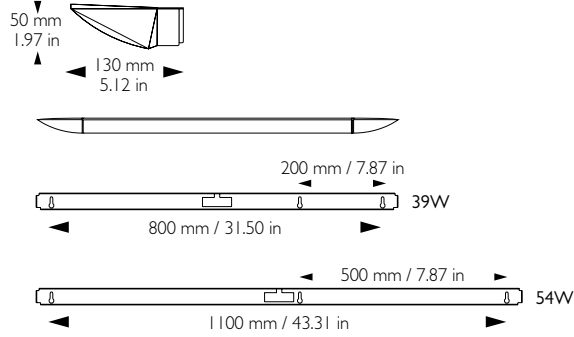

SERIES

BRAVO

CONFIGURATION I

3495: Suspension

3496: Wall

LAMPING

139: 1 X 39W Fluorescent T5-HO, Length 1200 mm *ONLY 3496*

154: 1 X 54W Fluorescent T5-HO, Length 1500 mm *ONLY 3496*

228: 2 X 28W Fluorescent T5-HE, Length 1470 mm *ONLY 3495*

254: 2 X 54W Fluorescent T5-HO, Length 1470 mm *ONLY 3495*

BALLAST

EB: Electronic HPF <10% THD

EB

VOLTAGE

UNV: Universal Voltage 120V to 277V

347: 347 Volts

FINISH

SILVER

BLACK

YELLOW

BLUE GREEN

WHITE

GREY

CREAM

SPECIFICATION SUBMITTAL

Job Name: _____ Job Number: _____

SPECIFIER (ENGINEER/ARCHITECT)

Name: _____