


The right light

**LUXO**

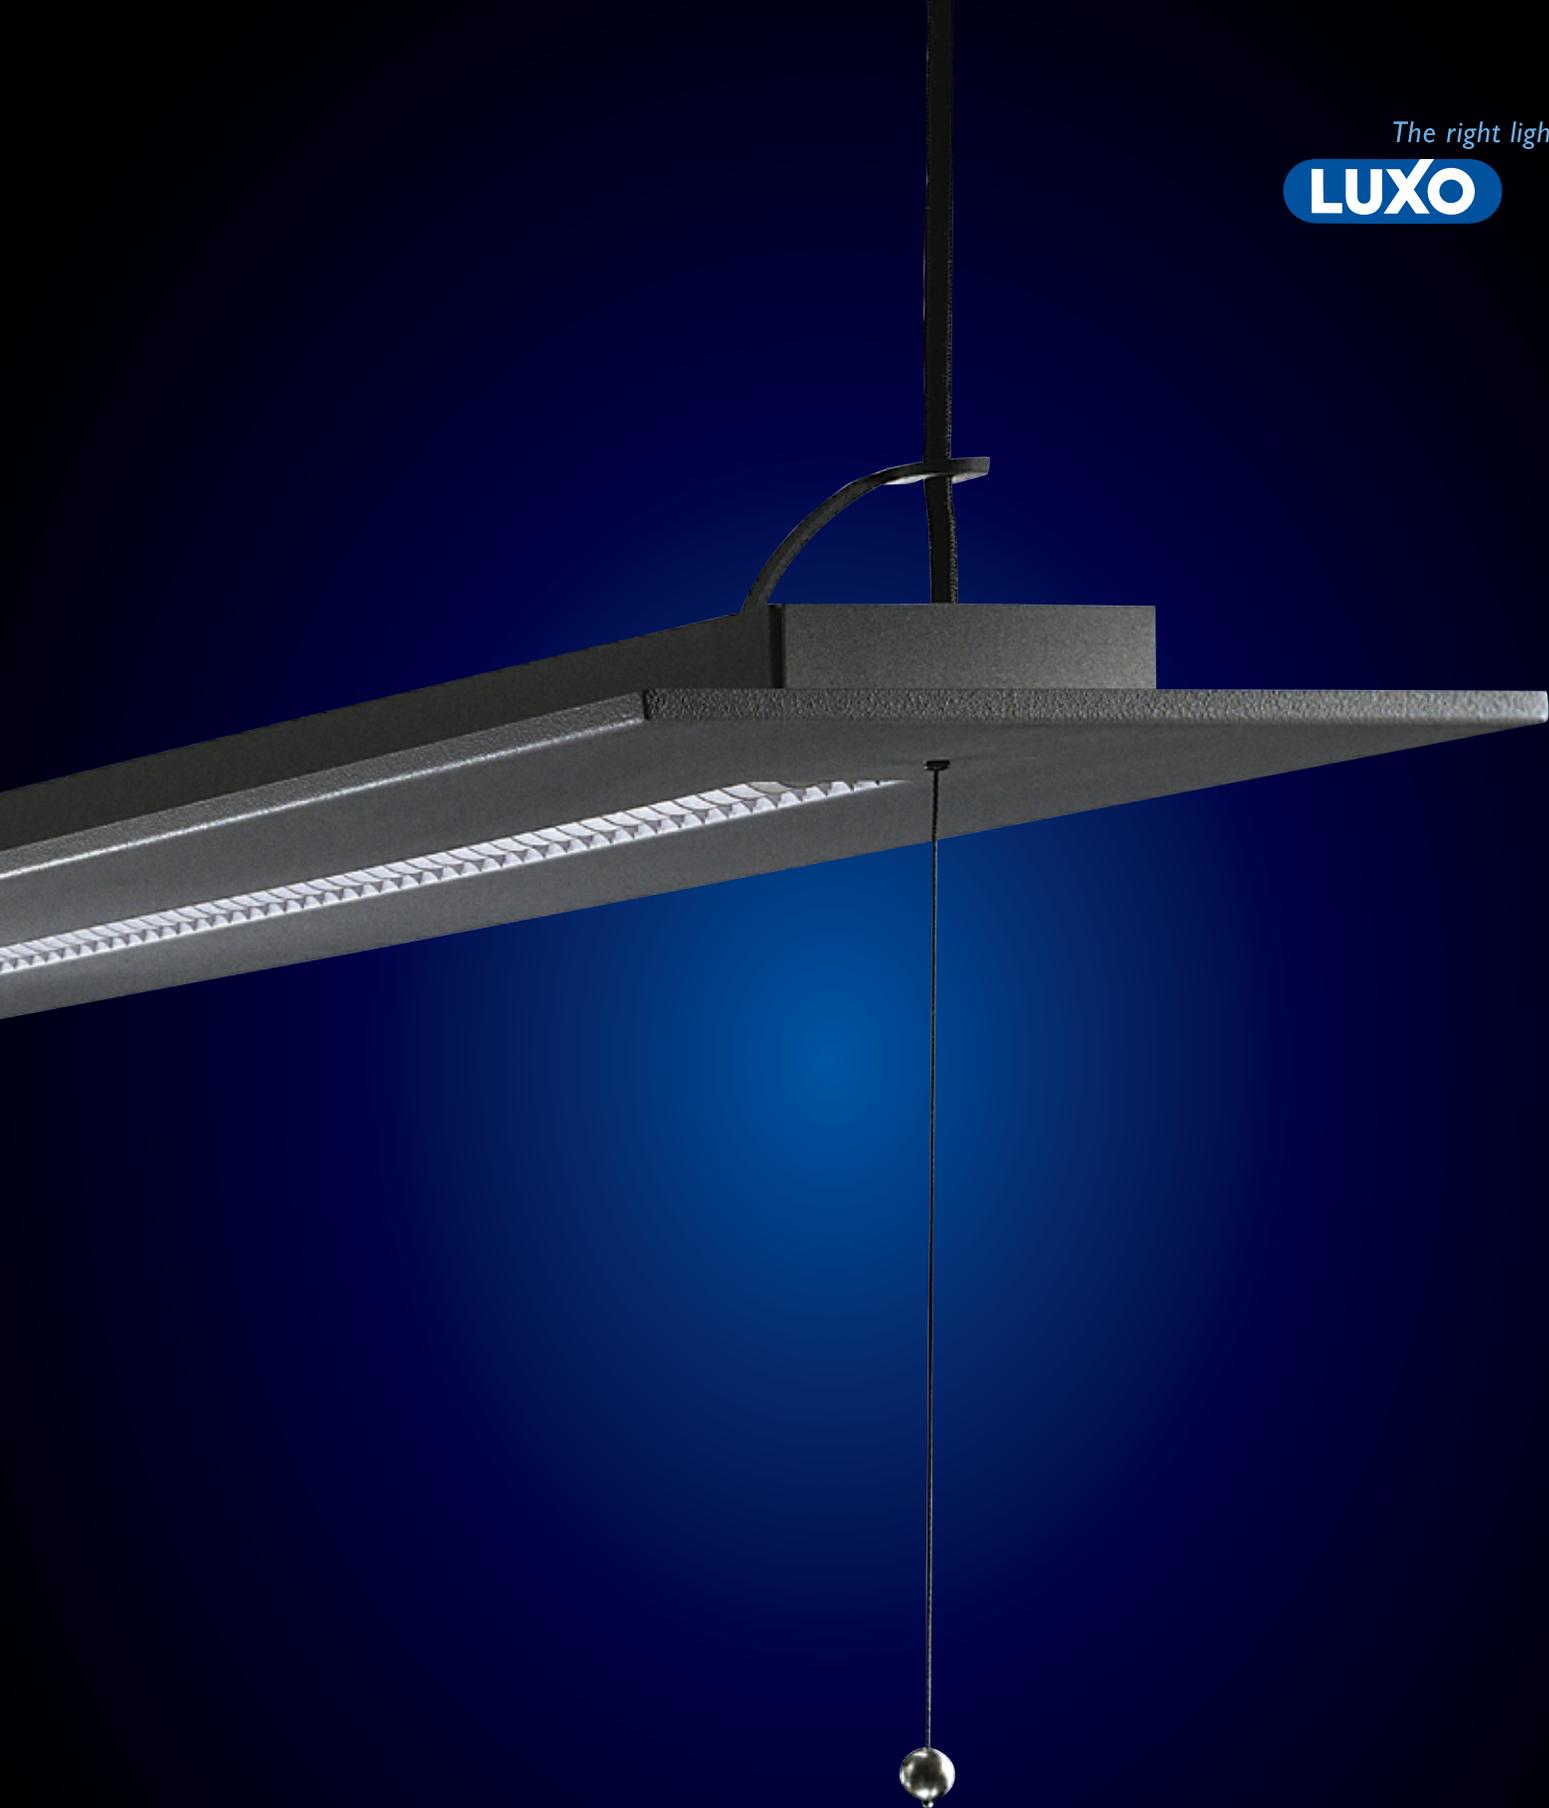

EDGE

Design Ark. S.E. Müller

L-13

EDGE  
SUSPENSION





EDGE  
WALL





# EDGE

TECHNICAL INFORMATION: Steel luminaire housing and diffuser finished in grey. Equipped as standard with pull switch for direct lighting. Supplied with 2.5 m (98.43 in) textile-wrapped black cable with earthed plug and 1 m (39.37 in) quickly adjustable wire suspension on one side. Supplied as standard with HF ballast.

3620-228+154 / 3620-254+128 / 3620-328 / 3620-354 EDGE SUSPENSION is a 3-lamp luminaire for T5 fluorescent lamps that provide direct and indirect light distribution. Suitable for a variety of settings, such as offices, conference rooms, exhibition areas, etc.

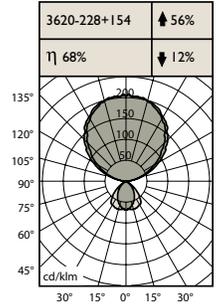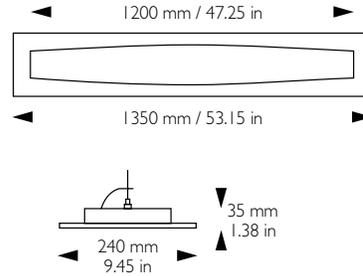

6409-118 EDGE EDGE is a recessed wall luminaire with an exciting design. It is the perfect complement to the Edge linear luminaire.

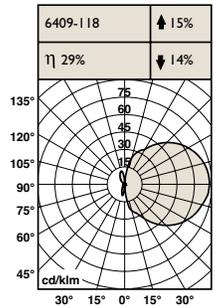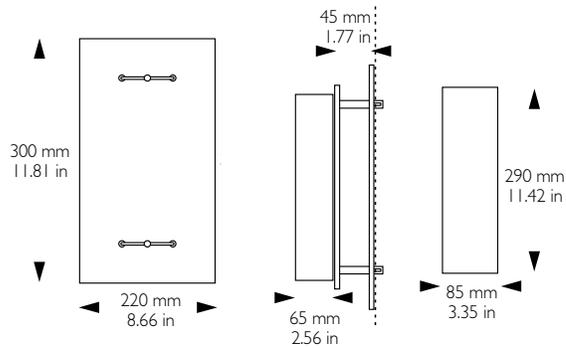

SERIES

EDGE

CONFIGURATION I

3620: Suspension

6409: Wall

LAMPING

I 18: 1 X 18W CFL Biax \*ONLY 6409\*

328: 3 X 28W Fluorescent T5-HE \*ONLY 3620\*

354: 3 X 54W Fluorescent T5-HO \*ONLY 3620\*

328-154: 2 X 28W, 1 X 54W Fluorescent T5-HE/HO \*ONLY 3620\*

254-128: 2 X 54W, 1 X 28W Fluorescent T5-HO/HE \*ONLY 3620\*

CIRCUIT

SG: Single

DL: Dual \*ONLY 3620\*

BALLAST

EB: Electronic HPF <10% THD

EB

VOLTAGE

UNV: Universal Voltage 120V to 277V

347: 347 Volts

FINISH

STD: GREY

STD

FACTORY OPTIONS

PS: Pull Switch

SPECIFICATION SUBMITTAL

Job Name: \_\_\_\_\_ Job Number: \_\_\_\_\_

SPECIFIER (ENGINEER/ARCHITECT)

Name: \_\_\_\_\_