


LUXIT



ROUNDLIGHT

Design P. King & S. Miranda


ROUNDLIGHT

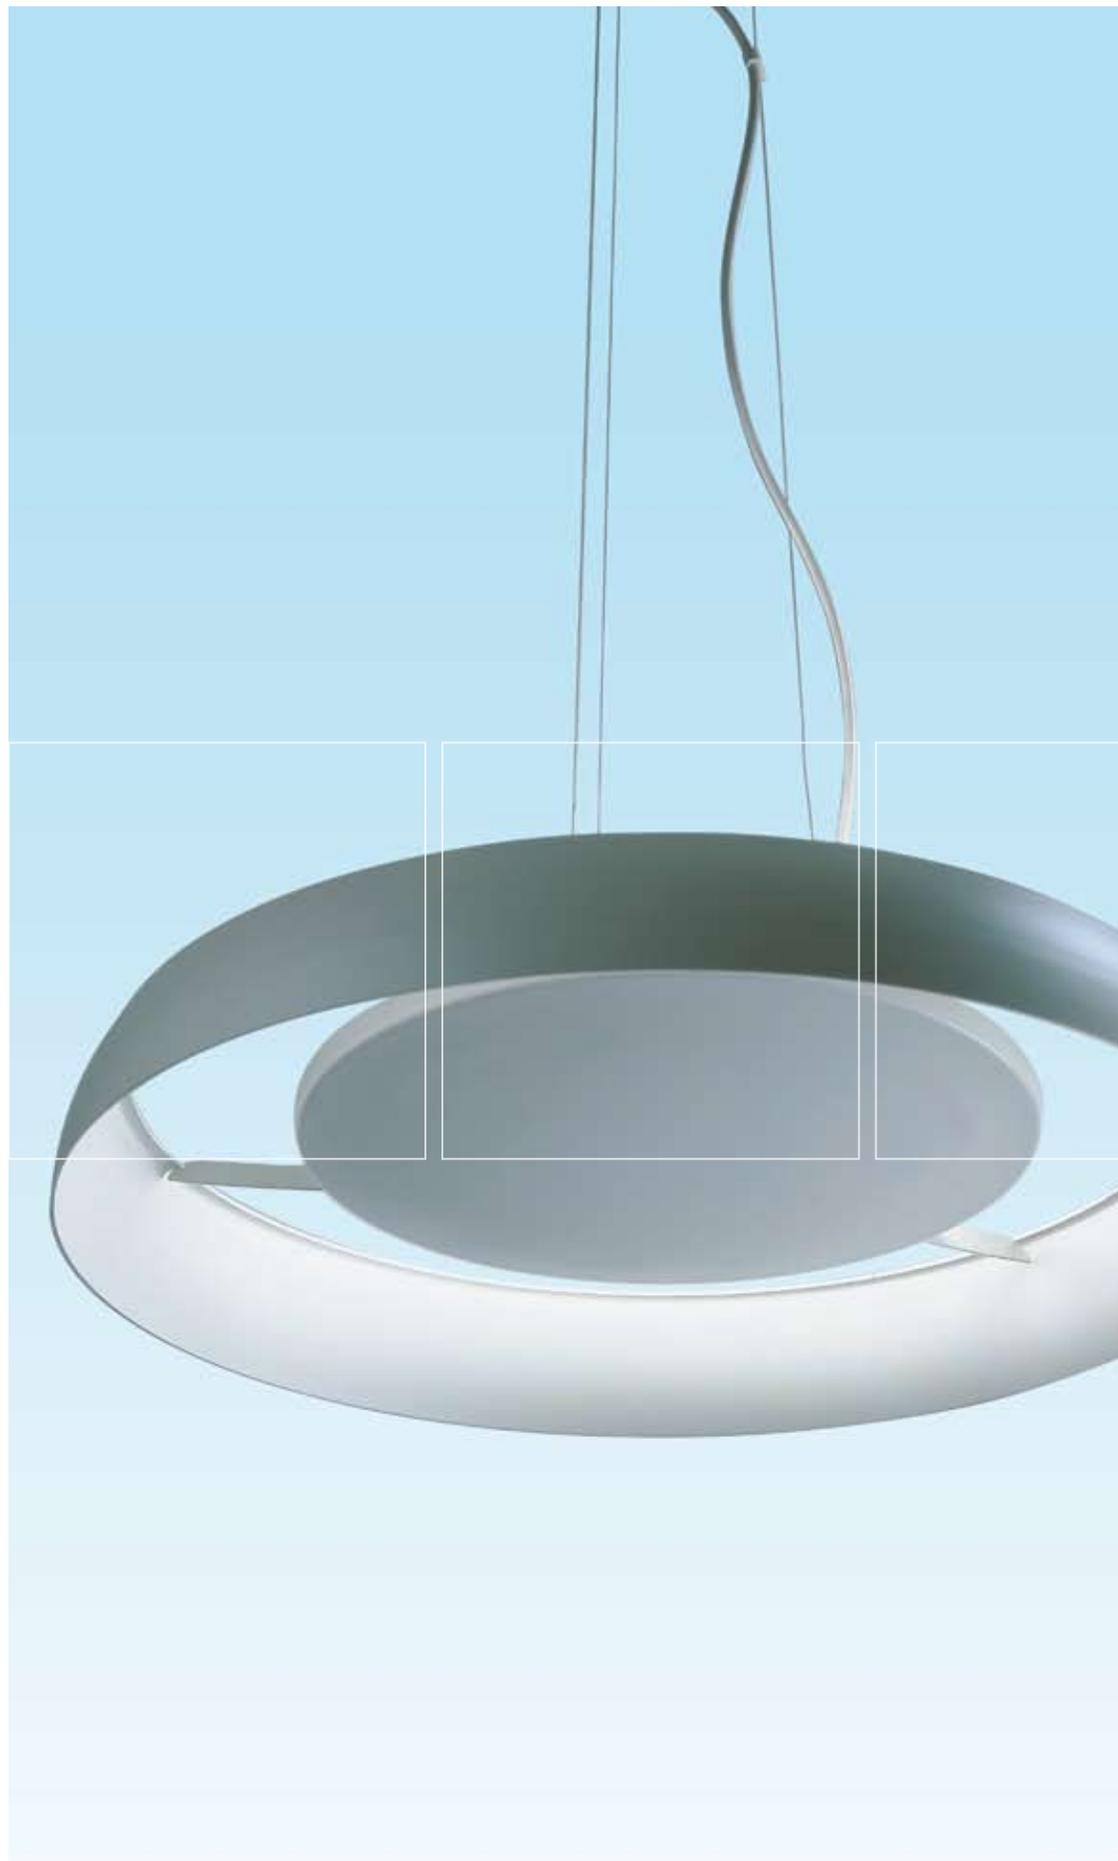

ROUNDLIGHT

New light fitting with a soft light and double emission. The structure of the lighting body is made of steel sheet and turned aluminum that houses the gear and the light sources and holds the external reflector ring, also made of turned aluminum, via three supports.

F5409

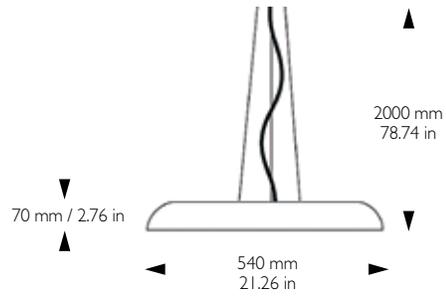

ROUNDLIGHT



SERIES

ROUNDLIGHT

CONFIGURATION I

F5421: Suspension

F5421

LAMPING

I40122: 1 X 40W, 1 X 22W Circline Fluorescent T5

I40122

LOUVER

STD: Standard

STD

CIRCUIT

SG: Single

DL: Dual

BALLAST

EB: Electronic HPF <10% THD

EB

VOLTAGE

UNV: Universal Voltage 120V to 277V

347: 347 Volts

FINISH

014: Matte White

027: Grey

SPECIFICATION SUBMITTAL

Job Name: _____ Job Number: _____

SPECIFIER (ENGINEER/ARCHITECT)

Name: _____