12540-2X2

PROJECT PROJET

SPEC TYPE

NOTES

FINISH COMBINATIONS COMBINAISONS DE FINIS

M G-M G-BLK

WH-BLK-BLK

WH-WH-WH

BLK-BLK-BLK

159X REMODELING
159X RÉNOVATION



169X NEW CONSTRUCTION
169X NOUVELLE CONSTRUCTION



☐8.9" x 8.9"
(226mm x 226mm)

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE — **12540-2X2**

12540-2X2	BASS 2X2

HOUSINGS BOÎTIERS

159X	REMODELING
169X	NEW CONSTRUCTION

LIGHT SOURCE SOURCE LUMINEUSE

AVAILABLE WITH CF.D.18 & CF.T.32 MAXIMUM 36° AIRCRAFT CABLE LENGTH

MR16.50	50W, HAL, MR16, GU5.3 BASE (MAGNETIC)
MR16.50.E	50W, HAL, MR16, GU5.3 BASE (ELECTRONIC)
MR16LED.16.E	16W MAX., LED, MR16, GU5.3 BASE
CMH.MR16.20	20W, CMH, MR16, GX10 BASE (ANSI M156)
LED.4.30.17	4W, LED 3000K (WARM) 17°
LED.4.30.48	4W, LED 3000K (WARM) 48°
LED.4.40.17	4W, LED 4000K (NEUTRAL) 17°
LED.4.40.48	4W, LED 4000K (NEUTRAL) 48°
LED.8.30.17	8W, LED 3000K (WARM) 17°
LED.8.30.48	8W, LED 3000K (WARM) 48°
LED.8.40.17	8W, LED 4000K (NEUTRAL) 17°
LED.8.40.48	8W, LED 4000K (NEUTRAL) 48°
LED.11.30.20	11W, LED 3000K (WARM), 20°
LED.11.30.40	11W, LED 3000K (WARM), 40°
LED.11.40.20	11W, LED 4000K (NEUTRAL), 20°
LED.11.40.40	11W, LED 4000K (NEUTRAL), 40°

VOLTAGE VOLTAGE

120V	120 VOLT
277V*	277 VOLT

*NOT AVAILABLE IN LED 8W WITHOUT DV DRIVER OPTION

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH LED ONLY

DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS OPTIONAL FOR 12540-1X1 4W & 8W AND STANDARD FOR 12540-1X1 11W, 12540-2X1, 12540-2X2, 12540-3X1 AND 12540-4X1, PLEASE SPECIFY YOUR DIMMING TYPE.

TRIM FINISH FINI CADRE

BLK	BLACK
M G	METALLIC GRAY
WH	WHITE

RING FINISH FINI ANNEAUX

BLK	BLACK
M G	METALLIC GRAY
WH	WHITE

ENCLOSURE FINISH FINI BOÎTIER

BLK	BLACK
WH	WHITE

ACCESSORY ACCESSOIRE

19540-2X2	FLUSH™ MOUNTING ACCESSORY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

DIM LED OUTER 45° INNER 30°

The contemporary and functional Bass multiple recessed fixture, features up to four fully directional light sources in both linear and square formats. Available with both standard and high performance Eureka LED modules with optional phase dimming (DP - 120V only) and 0-10V dimming (DV), as well as, MR16 lamp types (LED retrofit, CMH, GZ10 or halogen). Dimming is available for all light sources except CMH. To maximize design flexibility, the rings and the finish trim of the Bass are available in black, white or metallic gray, while the enclosure is offered in reflective white or discreet black. Using our patented automatically locating mounting clip, Bass is designed for quick installation in both new construction ceilings (169X) or when remodeling (159X) in an existing ceiling. When time is tight the 169X new construction option can be split so that the mounting plate and connection box with quick-connect are shipped in advance of the fixture housing. For a clean look without the hassle of a trim-less installation, the Bass fixture can be installed using our Flush™ mounting accessory (19540).

Contemporain et fonctionnel, l'encastré multiple Bass comprend quatre ampoules orientables en configuration linéaire ou carrée. Disponible en deux standards, soit avec les Modules DEL Eureka haute-performance avec option de gradation de type phase (DP – 120V seulement) ou gradation 0-10V (DV), ou avec ampoules de type MR16 (DEL retrofit, CMH, HZ10 ou halogène). Gradation disponible pour toutes les sources lumineuses sauf CMH. Afin de maximiser les options de finis, les anneaux et les cadres sont traités séparément en blanc, noir ou gris métallique tandis que les boîtiers sont disponibles en blanc réflectif ou en noir. Grâce au montant de positionnement automatique breveté, Bass s'installe rapidement au plafond des nouvelles constructions (169X) ou des projets de rénovation (159X). Lorsque le temps est compté, le boîtier de construction 169X peut être divisé en deux parties, où la plaque de montage et la boîte de jonction sont livrées avant le boîtier du multiple. De plus, pour un effet épuré sans cadre, Bass s'installe rapidement à ras le plafond avec l'accessoire de montage Flush™ (19540).

EUREKA

SPECIFICATION

ANATOMY

DIM LED OUTER 45° INNER 30°

12540-XXX

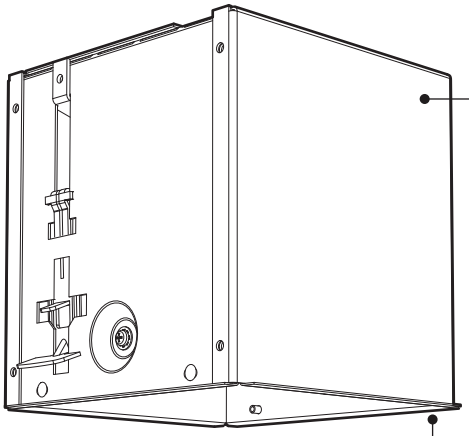

CONTEMPORARY DESIGN
Recessed multiple fixture.
Features up to 4 fully directional light sources in 5 versatile configurations.

LIGHT SOURCES
HAL: 50W
CMH: 16W
LED: 4W / 8W / 11W
(Optional dimming available with Led)

18 POSSIBLE FINISH COMBINATIONS:

ENCLOSURE
Discreet black / Reflective white

RING
Black / White / Metallic gray
Independant and fully aimable



TRIM
Black / White / Metallic gray
Highly decorative, or can be hidden



REMODELING OPTION
Unique automatically locating mounting clips for quick installation

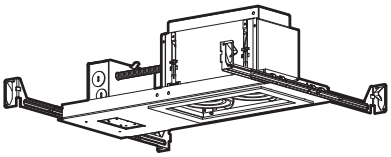

NEW CONSTRUCTION OPTION
Mounting plate available for split shipping in advance



FLUSH™ MOUNTING ACCESSORY
Quick and clever design for a trim-less look

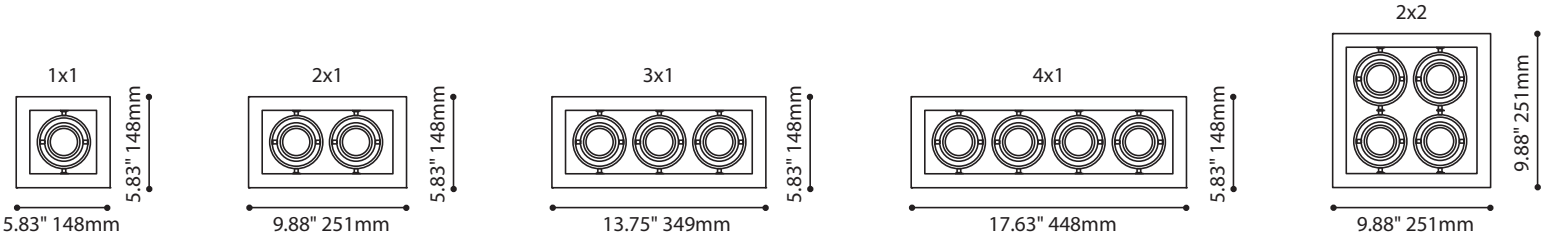

SPECIFICATIONS	LED 4W	LED 8W	LED 11W
LIGHT SOURCE	4 x Nichia NVSL219BT-V1	4 x Nichia NVSL219BT-V1	1 x Nichia Chip On Board (COB) NSBLL066A
OPTIC	TIR - 20° & 38° total beam angle	TIR - 20° & 38° total beam angle	TIR - 20° & 40° total beam angle
MODULE	UL recognized - made in USA		
LUMENS (DELIVERED)	400 lm (3000K & 4000K)	715 lm (3000K & 4000K)	1000 lm (3000K & 4000K)
EFFICIENCY	100 lm/w (3000K & 4000K)	90 lm/w (3000K & 4000K)	90 lm/w (3000K & 4000K)
CCT	ANSI 3000K / 4000K 3-Step MacAdam Ellipse Binning		
CRI	84 CRI (3000K & 4000K)	84 CRI (3000K & 4000K)	83 CRI (3000K & 4000K)
DRIVER (NON-DIMMING)	350 mA Constant Current	700mA Constant Current	350 mA Constant Current
DRIVER (DIMMING)	0-10V Dimming (DV) / Phase Dimming (DP)		
VOLTAGE	120V or 277V		
L70 / LM-79	50 000 hrs / Available	50 000 hrs / Available	50 000 hrs / Available
CERTIFICATION / WARRANTY	c-UL-us / 5 year		

*Please consult factory for dimming & controller options.

EUREKA

12540-XXX
BASS

V1.0-201505

Eureka Lighting©2015

ANATOMIE

DIM LED EXTÉRIEUR 45° INTÉRIEUR 30°

12540-XXX

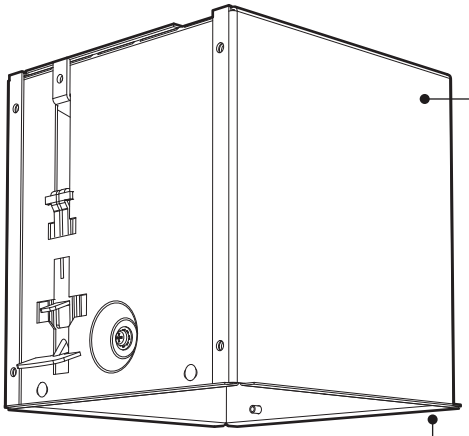

DESIGN CONTEMPORAIN
L'encastré multiple Bass comprend quatre lampes orientables en configuration linéaire ou carrée.

SOURCE LUMINEUSE
HAL: 50W
CMH: 16W
LED: 4W / 8W / 11W
(DEL offertes avec options de gradation)

18 COMBINAISONS DE FINITION POSSIBLES:

BOITIERS
Noir / Blanc réflectif

ANNEAUX
Noir discret / Blanc / Gris métallique
Indépendants et directionnels



CADRES
Noir / Blanc / Gris métallique
Décoratifs ou cachés



RÉNOVATION
Système breveté exclusif de fixation pour installation rapide

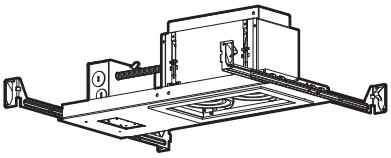

NOUVELLE CONSTRUCTION
La plaque de montage peut être expédié séparement du boîter, afin d'anticiper l'installation du gypse



L'ACCESSOIRE DE MONTAGE FLUSH™
Conception rapide et intelligent pour un look sans bordure

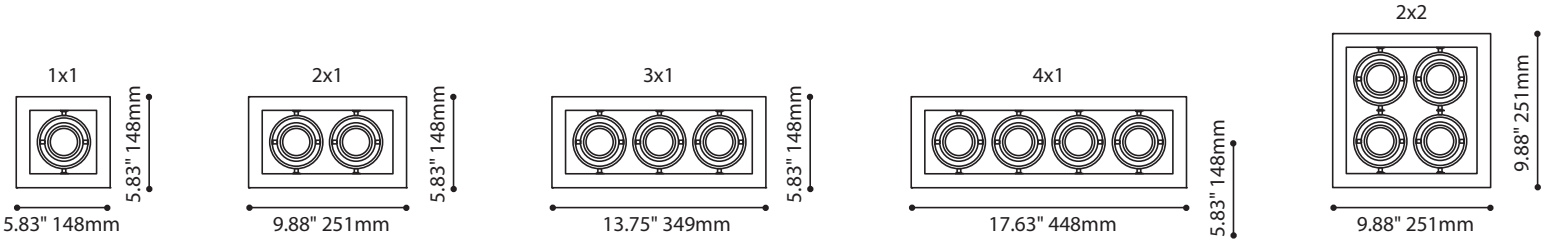

CARACTÉRISTIQUES	LED 4W	LED 8W	LED 11W
SOURCE LUMINEUSE	4 x Nichia NVSL219BT-V1	4 x Nichia NVSL219BT-V1	1 x Nichia Chip On Board (COB) NSBLL066A
OPTIQUE	TIR - 20° & 38° angle de faisceau	TIR - 20° & 38° angle de faisceau	TIR - 20° & 40° angle de faisceau
MODULE	UL reconnu- Fabriqué aux États-Unis		
LUMENS (RÉELS)	400 lm (3000K & 4000K)	715 lm (3000K & 4000K)	1000 lm (3000K & 4000K)
EFFICACITÉ	100 lm/w (3000K & 4000K)	90 lm/w (3000K & 4000K)	90 lm/w (3000K & 4000K)
CCT	ANSI 3000K / 4000K 3-Step MacAdam Ellipse Binning		
IRC	84 CRI (3000K & 4000K)	84 CRI (3000K & 4000K)	83 CRI (3000K & 4000K)
PILOTE (SANS GRADATION)	350 mA Courant Constant	700mA Courant Constant	350 mA Courant Constant
PILOTE (GRADATEUR)	0-10V Gradation (DV) / Gradation Phase (DP)		
VOLTAGE	120V or 277V		
L70 / LM-79	50 000 hrs / disponible	50 000 hrs / disponible	50 000 hrs / disponible
CERTIFICATION / GARANTIE	c-UL-us / 5 ans		

*Veuillez communiquer avec votre représentant pour la liste de gradateurs compatibles.

EUREKA

12540-XXX BASS

V1.0-201505

Eureka Lighting©2015