

HI-FI 2106-50

PROJECT PROJÉT
SPEC TYPE
NOTES



OPTIONS



2106-50-AR111.50

2106-50-PAR30.75

2106-50-PAR20.50

OVERALL HEIGHT HAUTEUR HORS TOUT



LIGHT SOURCE	HAL TRACK 1 CIRCUIT	INC TRACK 1 CIRCUIT	INC TRACK 2 CIRCUIT	INC-HAL
MOUNTING	2734	2734B	2764B	2401E
STEM	45.00"	44.35"	45.95"	44.00"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2734	2734B	2764B	2401E
3.85" x 2.03" 98 x 52mm	1.46" x 1.36" 37 x 35mm	3.29" x 1.96" 84 x 48mm	Ø4.50" x 1.00" Ø114 x 25mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

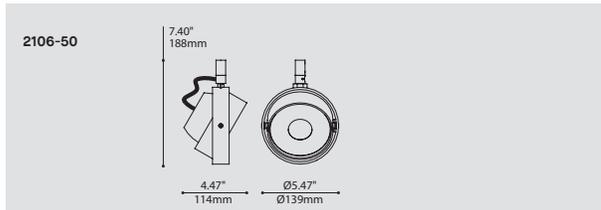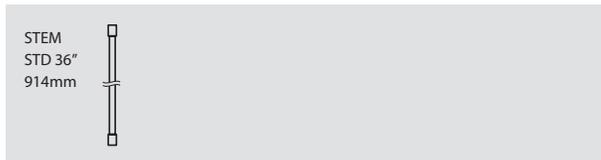

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	2106-50	HI-FI	CODE	2106-50
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)			
MR16C.50		50W, HAL, MR16C, GU5.3 BASE		
AR111.50		50W, HAL, AR111, G53 BASE		
PAR20.50		50W, INC, PAR20, MEDIUM BASE (120V ONLY)		
PAR30.75		75W, INC, PAR30, MEDIUM BASE (120V ONLY)		
VOLTAGE VOLTAGE	120V 120 VOLT			
	277V* 277 VOLT			
	*NOT AVAILABLE WITH A TRACK ADAPTOR			
STEM TIGE	S6 1/4" (6MM) STEM, FIELD ADJUSTABLE			
	- NO STEM			
STEM LENGTH LONGUEUR DE TIGE	S6 36" STEM (STD LENGTH)			
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)			
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE			
MOUNTING MONTAGE	RC ROUND CANOPY / PAVILLON ROND			
		1" CANOPY (2401E)		
TA1		TRACK ADAPTOR / ADAPTATEUR DE RAIL		
		HAL 120/12V ADAPTOR (2734)		
		INC 120V ADAPTOR (2734B)		
TA2		2 CIRCUITS		
		INC 120V ADAPTOR (2764B)		
MOUNTING OPTION OPTION DE MONTAGE	SCA SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)			
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL ^(A)	WH WHITE			
	BLK BLACK			
	M G METALLIC GRAY (1 CIRCUIT ONLY)			
	^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY			
STRUCTURE FINISH FINI STRUCTURE ^(B)	M G METALLIC GRAY			
	^(B) INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED			

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: High style. High design. Rotating and aiming head that is ceiling or track mounted with or without stem.

LIGHT SOURCE: A wide range of projector lamps available, including MR16, PAR or AR111.

STRUCTURE: CNC machined aluminum and die-formed steel with metallic gray polyester powder finish.

CERTIFIED: c-CSA-us, c-UL-us

CONCEPTION: Esthétique relevé. Tête rotative et directionnelle s'installant au plafond ou sur rail avec ou sans tige.

SOURCE LUMINEUSE: Plusieurs sources lumineuses disponibles, incluant MR16, PAR ou AR111.

STRUCTURE: Aluminium usiné par contrôle numérique et acier embouti avec fini peinture électrostatique grise métallisée à base de polyester.

CERTIFIÉ: c-CSA-us, c-UL-us