

SILENE CLASSIC DOUBLE 3155B-JDJ / JDJA


PROJECT PROJÉT

SPEC TYPE

NOTES



OPTIONS

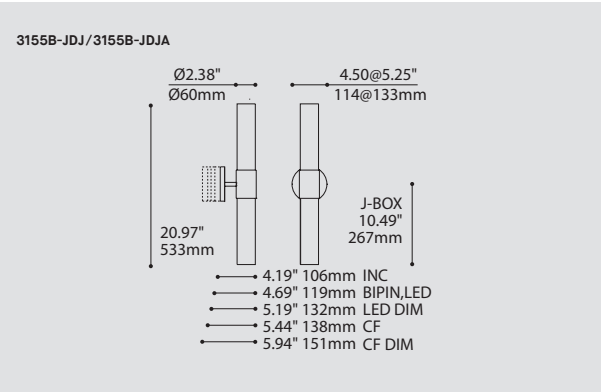

ORDERING SPECIFICATION		SPECIFICATION DE COMMANDE	CODE
MODEL	MODÈLE		
3155B-JDJ	SILENE CLASSIC DOUBLE JDJ		
3155B-JDJA	SILENE CLASSIC DOUBLE JDJA (CLOSED TOP AND BOTTOM ACRYLIC DIFFUSER)		
LIGHT SOURCE		SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)			
3155B-JDJ			
2XCF.D.13		13W X 2, CFL, DOUBLE TWIN TUBE, G24Q1 BASE	
2XCF.D.18		18W X 2, CFL, DOUBLE TWIN TUBE, G24Q2 BASE	
2XCF.D.26		26W X 2, CFL, DOUBLE TWIN TUBE, G24Q3 BASE	
2XCF.S.13		13W X 2, CFL, TWIN TUBE, GX23 BASE (MAGNETIC) (120V ONLY)	
2XBIPIN.50		50W X 2, HAL, BIPIN, GY6.35 BASE	
2XINC.100		100W X 2, INC, B10 / HAL T10, MEDIUM BASE (120V ONLY)	
2XLED.4.30		4W X 2, LED 3000K (WARM) (120V ONLY FOR NON-DIMMING DRIVER)	
2XLED.4.40		4W X 2, LED 4000K (NEUTRAL) (120V ONLY FOR NON-DIMMING DRIVER)	
3155B-JDJA			
2XCF.D.13		13W X 2, CFL, DOUBLE TWIN TUBE, G24Q1 BASE	
2XCF.D.18		18W X 2, CFL, DOUBLE TWIN TUBE, G24Q2 BASE	
2XCF.S.13		13W X 2, CFL, TWIN TUBE, GX23 BASE (MAGNETIC) (120V ONLY)	
2XLED.4.30		4W X 2, LED 3000K (WARM) (120V ONLY FOR NON-DIMMING DRIVER)	
2XLED.4.40		4W X 2, LED 4000K (NEUTRAL) (120V ONLY FOR NON-DIMMING DRIVER)	
VOLTAGE		VOLTAGE	
120V		120 VOLT	
277V		277 VOLT	
347V*		347 VOLT	
*ONLY AVAILABLE WITH 2XCF.D.13, 2XCF.D.18, 2XCF.D.26 (NON-DIMMING BALLAST)			
DIMMING OPTION		OPTION DE GRADATION	
AVAILABLE WITH 2XCF.D.18 & 2XCF.D.26 ONLY			
DM1		ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST	
DED		LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)	
DE3		LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
AVAILABLE WITH 2XCF.D.13, 2XCF.D.18 & 2XCF.D.26 ONLY			
DM7		ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST	
FOR LED ONLY			
DV		0-10V DIMMING (120-277V)	
DP		PHASE DIMMING (120V ONLY)	
MOUNTING		MONTAGE	RC
RC		ROUND CANOPY / PAVILLON ROND	
		FOR INC: 4.50" X 0.50" CANOPY (2401C)	
		FOR HAL & LED: 4.50" X 1" CANOPY (2401E)	
		FOR CFL: 5.25" X 1.75" CANOPY (2402G)	
		FOR ELECTRONIC CFL DIMMABLE: 5.25" X 2.25" CANOPY (2402J)	
		FOR LED DIMMABLE: 4.50" X 1.50" CANOPY (2403G)	
STRUCTURE FINISH		FINI STRUCTURE	
S C		SATIN CHROME	
CHR		CHROME	
DIFFUSER FINISH		FINI DIFFUSEUR	
3155B-JDJ			
WH		WHITE	
FRO		FROSTED	
3155B-JDJA			
WH		WHITE	
PRODUCT CHARACTERISTICS		CARACTÉRISTIQUES DU PRODUIT	
BIM			
DIM			
IES			
LED			
DESIGN:	Double silene diffuser sconce with straight stem and screw mount diffuser.		
LIGHT SOURCE:	LED and other light sources also available.		
STRUCTURE:	Die-stamped steel and tubular steel structure with plated finish.		
DIFFUSER:	Hand blown frosted or white triplex glass (JDJ) or extruded clear ribbed diffuser (JMJ). Also available with a closed top and bottom acrylic shade (JDJA).		
CERTIFIED:	c-CSA-us		
CONCEPTION:	Applique double munie d'une tige droite et de filets pour visser le diffuseur.		
SOURCE LUMINEUSE:	DEL et autres sources disponibles.		
STRUCTURE:	Acier embouti et structure d'acier tubulaire plaqués.		
DIFFUSEUR:	Diffuseur triplex givré ou blanc soufflé à la main (JDJ) ou extrudé strié clair (JMJ). Aussi disponible avec un diffuseur en acrylique au dessus et dessous fermé (JDJA).		
CERTIFIÉ:	c-CSA-us		

WALL MOUNT 3155B-JMJ/JDJ/JDJA

SCREW MOUNT GLASS

JMJ-CLR/FRO
Extruded clear or
frosted ribbed glass

JDJ-WH/FRO
Hand blown white
triplex glass

JDJA-WH
Closed top white
acrylic shade

LED MODULE WITH
DIE-CAST ALUMINUM
HEATSINK
(DOUBLE FOR 3155B)

Black anodized for
improved thermal
management

STRUCTURE


Die-stamped steel
with plated finish

SUSPENSION 4156B-JMJ/JDJ/JDJA


WALL MOUNT 3156B-JMJ/JDJ/JDJA

48° TOTAL BEAM ANGLE
PMMA TIR (total internal
reflecting) Ledil optic


**OTHER LIGHT
SOURCES AVAILABLE**
Fluorescent
Halogen (for JDJ/JMJ)
Incandescent
(for JDJ/JMJ)

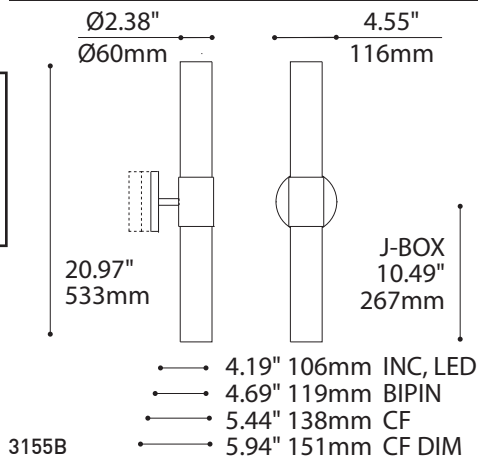

3155B



4156B

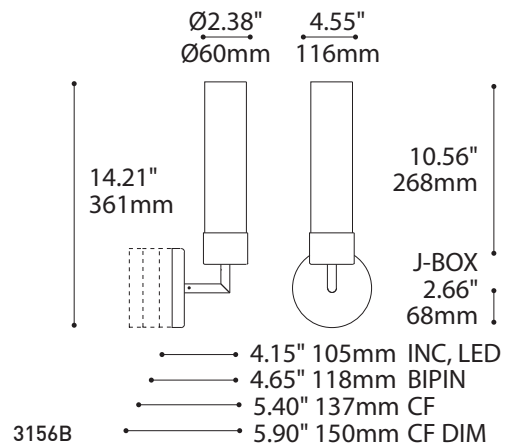

3156B

SPECIFICATIONS

LIGHT SOURCE
MODULE
LUMENS (ESTIMATED)
CRI
ROHS
VOLTAGE
DRIVER
DIMMING
WARRANTY
LM-79 & CERTIFICATION

3155B LED

2 x Luxeon Rebel ES on MCPCB - total ±8 w
UL recognized - made in USA
752 lm [3000K] - 936 lm [4000K] initial
95 CRI [3000K] - 85 CRI [4000K]
Compliant
120V - 240V
Hatch 350 mA
Phase dimming (DP) & 0-10V Dimming (DV)
5 years (on electronic components)
Available & CSA recognized

4156B /3156B LED

1 x Luxeon Rebel ES on MCPCB - total ±4 w
376 lm [3000K] - 468 lm [4000K] initial
120V or 277V
Lightech 350 mA

SPECIFICATIONS

LIGHT SOURCE
VOLTAGE

Fluorescent

CFL 13/18/26 w (x 2 for 3155B)
120V-277V-347V, 120V for GX23
(dimming option available)

Halogen (for JDJ/JMJ)

Bipin 50 w (x 2 for 3155B)
120V-277V


Incandescent (for JDJ/JMJ)

B10/T10 100 w (x 2 for 3155B)
120V




3155B 4156B
3156B


APPLIQUE MURALE 3155B-JMJ/JDJ/JDJA

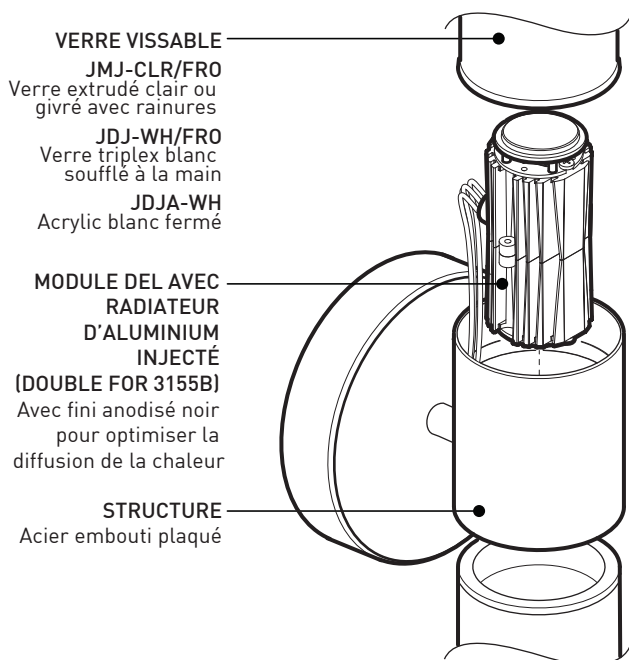


SUSPENSION 4156B-JMJ/JDJ/JDJA APPLIQUE MURALE 3156B-JMJ/JDJ/JDJA

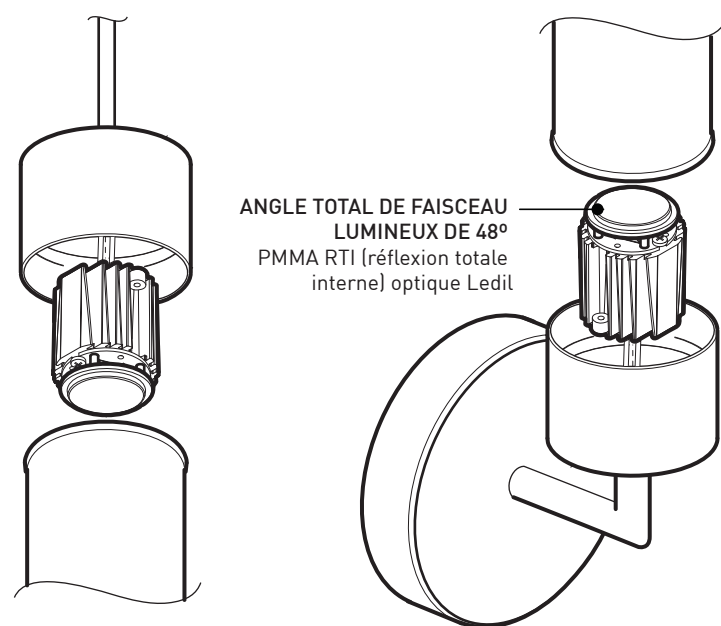


AUTRES SOURCES LUMINEUSES DISPONIBLES
Fluorescent
Halogène (pour JDJ/JMJ)
Incandescent (pour JDJ/JMJ)

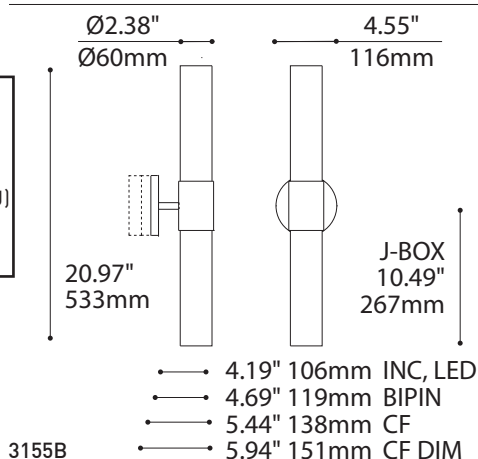

3155B



4156B

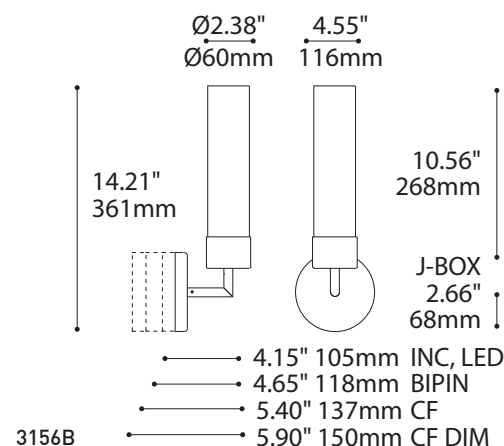

3156B

SPECIFICATIONS

SOURCE LUMINEUSE
MODULE
LUMENS (ESTIMÉ)
IRC
ROHS
VOLTAGE
PILOTE
GRADATION
GARANTIE
LM-79 & CERTIFICATION

3155B DEL

2 x Luxeon Rebel ES sur MCPCB - total ±8 w
Reconnu par UL - fabriqué aux États-Unis
752 lm [3000K] - 936 lm [4000K] initial
95 CRI [3000K] - 85 CRI [4000K]
Conforme
120V - 240V
Hatch 350 mA
Gradation phase [DP] & Gradation 0-10V [DV]
5 ans (sur les composantes électroniques)
Reconnu par CSA

4156B /3156B DEL

1 x Luxeon Rebel ES sur MCPCB - total ±4 w
376 lm [3000K] - 468 lm [4000K] initial
120V ou 277V
Lighttech 350 mA

SPECIFICATIONS

SOURCE LUMINEUSE
VOLTAGE

Fluorescent

CFL 13/18/26 w (x 2 pour 3155B)
120V-277V-347V, 120V pour GX23
(option de gradation disponible)

Halogène (for JDJ/JMJ)

Bipin 50 w (x 2 pour 3155B)
120V-277V

Incandescent (for JDJ/JMJ)

B10/T10 100 w (x 2 pour 3155B)
120V