

MINI SILENE 3165-IDH / IDHA

PROJECT PROJET

SPEC TYPE

NOTES



OPTIONS




IDH-WH



IDHA-WH (ACRYLIC)

3165-IDH/IDHA

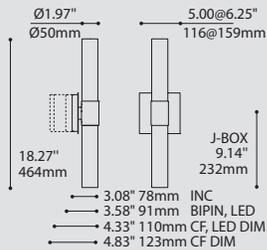

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

3165-IDH MINI SILENE DOUBLE IDH
3165-IDHA MINI SILENE DOUBLE IDHA (CLOSED TOP AND BOTTOM ACRYLIC DIFFUSER)

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

3165-IDH
2XCF.D.13 13W X 2, CFL, DOUBLE TWIN TUBE, G24Q1 BASE
2XCF.S.13 13W X 2, CFL, TWIN TUBE, GX23 BASE (MAGNETIC) (120V ONLY)
2XBIPIN.50 50W X 2, HAL, BIPIN, GY6.35 BASE
2XINC.75 75W X 2, INC, B10 / HAL T10, MEDIUM BASE (120V ONLY)
2XLED.4.30 4W X 2, LED 3000K (WARM) (120V ONLY FOR NON-DIMMING DRIVER)
2XLED.4.40 4W X 2, LED 4000K (NEUTRAL) (120V ONLY FOR NON-DIMMING DRIVER)

3165-IDHA

2XCF.D.13 13W X 2, CFL, DOUBLE TWIN TUBE, G24Q1 BASE
2XCF.S.13 13W X 2, CFL, TWIN TUBE, GX23 BASE (MAGNETIC) (120V ONLY)
2XLED.4.30 4W X 2, LED 3000K (WARM) (120V ONLY FOR NON-DIMMING DRIVER)
2XLED.4.40 4W X 2, LED 4000K (NEUTRAL) (120V ONLY FOR NON-DIMMING DRIVER)

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT
347V* 347 VOLT
 *ONLY AVAILABLE WITH 2XCF.D.13 (NON-DIMMING BALLAST)

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH 2XCF.D.13 ONLY
DM7 ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST

FOR LED ONLY

DV 0-10V DIMMING (120-277V)
DP PHASE DIMMING (120V ONLY)

MOUNTING MONTAGE

SQC

SQC SQUARE CANOPY / PAVILLON CARRÉ
 FOR INC: 5.00" X 0.50" CANOPY (2431C)
 FOR HAL & LED: 5.00" X 1" CANOPY (2431E)
 FOR CFL & LED DIMMABLE: 5.25" X 1.75" CANOPY (2431G)
 FOR ELECTRONIC CFL DIMMABLE: 5.75" X 2.25" CANOPY (2431J)

STRUCTURE FINISH FINI STRUCTURE

SC SATIN CHROME
CHR CHROME

DIFFUSER FINISH FINI DIFFUSEUR

WH

WH WHITE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Contemporary silene diffuser sconce with screw mount diffuser.
LIGHT SOURCE: 4W LED in 3000K (Warm white) or 4000K (Neutral white); other light sources also available.
STRUCTURE: Die-stamped steel structure with plated finish.
DIFFUSER: Hand blown white triplex diffuser (IDH). Also available with a closed top and bottom acrylic shade (IDHA).
CERTIFIED: c-CSA-us

CONCEPTION: Applique contemporaine et classique munie d'un filet pour visser le verre
SOURCE LUMINEUSE: DEL 4W disponible en 3000K (blanc chaud) ou 4000K (blanc neutre); autres sources disponibles
STRUCTURE: Acier embouti plaqué
DIFFUSEUR: Verre triplex blanc soufflé à la main (IDH). Aussi disponible avec un diffuseur en acrylique au dessus fermé (IDHA)
CERTIFIÉ: c-CSA-us



FAMILY FAMILLE



3166-IDH/IDHA

WALL MOUNT 3165-IDH/IDHA/IMH

- SCREW MOUNT GLASS**
 - IDH-WH
Hand blown white triplex glass
 - IDHA-WH
Closed top white acrylic shade
 - IMH-CLR/FRO
Extruded clear or frosted ribbed glass
- LED MODULE WITH DIE-CAST ALUMINUM HEATSINK (DOUBLE FOR 3165)**
Black anodized for improved thermal management
- STRUCTURE**
Die-stamped steel with plated finish

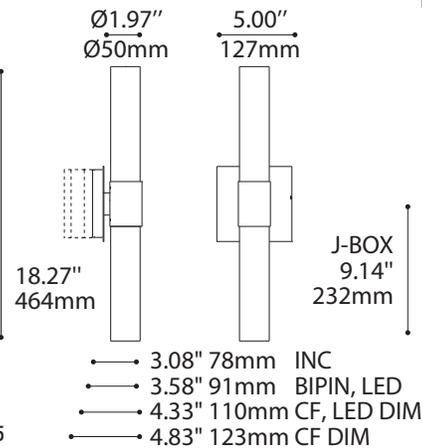
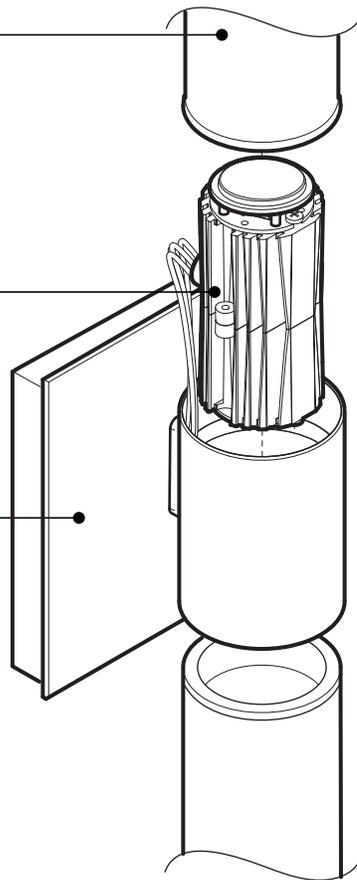


3165

WALL MOUNT 3166-IDH/IDHA/IMH

OTHER LIGHT SOURCES AVAILABLE
 Fluorescent (for IDH/IDHA)
 Halogen (for IDH/IMH)
 Incandescent (for IDH/IMH)

48° TOTAL BEAM ANGLE
 PMMA TIR (total internal reflecting) Ledil optic

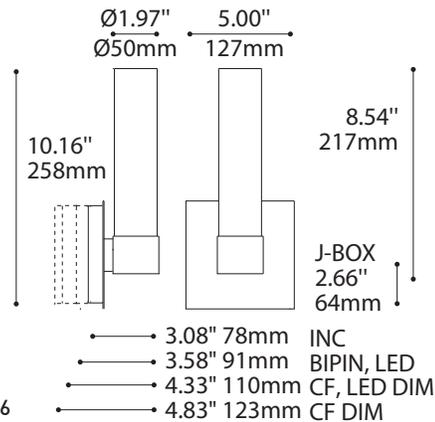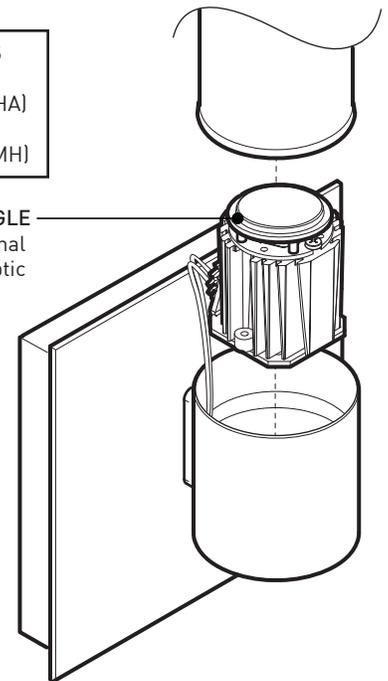

3166

SPECIFICATIONS

3165 LED

LIGHT SOURCE	2 x Luxeon Rebel ES on MCPCB - total ±8 w
MODULE	UL recognized - made in USA
LUMENS (ESTIMATED)	752 lm (3000K) - 936 lm (4000K) initial
CRI	95 CRI (3000K) - 85 CRI (4000K)
ROHS	Compliant
VOLTAGE	120V - 240V
DRIVER	Hatch 350 mA
DIMMING	Phase dimming (DP) or 0-10V Dimming (DV)
WARRANTY	5 years (on electronic components)
LM-79 & CERTIFICATION	Available & CSA recognized

3166 LED

LIGHT SOURCE	1 x Luxeon Rebel ES on MCPCB - total ±4 w
LUMENS (ESTIMATED)	376 lm (3000K) - 468 lm (4000K) initial
VOLTAGE	120V or 277V
DRIVER	Lighttech 350 mA

SPECIFICATIONS

Fluorescent (for IDH/IDHA)

Halogen (for IDH/IMH)

Incandescent (for IDH/IMH)

LIGHT SOURCE	CFL twin tube 13 w (x 2 for 3165)	Bipin 50 w (x 2 for 3165)	B10/T10 75 w (x 2 for 3165)
VOLTAGE	120V-277V-347V (dimming option available)	120V-277V	120V



3165
3166

APPLIQUE MURALE 3165-IDH/IDHA/IMH

APPLIQUE MURALE 3166-IDH/IDHA/IMH


VERRE VISSABLE
IDH-WH
 Verre triplex blanc soufflé à la main
IDHA-WH
 Acrylic blanc fermé
IMH-CLR/FRO
 Verre extrudé clair ou givré avec rainures

MODULE DEL AVEC RADIATEUR D'ALUMINIUM INJECTÉ (DOUBLE FOR 3165)
 Avec fini anodisé noir pour optimiser la diffusion de la chaleur


STRUCTURE
 Acier embouti plaqué

AUTRES SOURCES LUMINEUSES DISPONIBLES
 Fluorescent (pour IDH/IDHA)
 Halogène (pour IDH/IMH)
 Incandescent (pour IDH/IMH)

ANGLE TOTAL DE FAISCEAU LUMINEUX DE 48°
 PMMA RTI (réflexion totale interne) optique Ledil

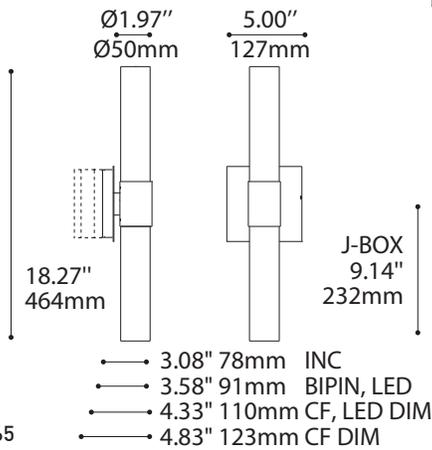

3165

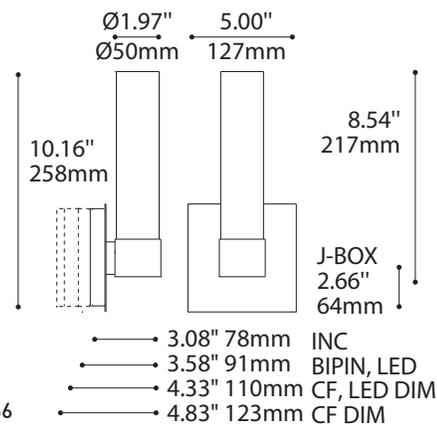

3166

SPÉCIFICATIONS

SOURCE LUMINEUSE
MODULE
LUMENS (ESTIMATED)
IRC
ROHS
VOLTAGE
PILOTE
GRADATION
GARANTIE
LM-79 & CERTIFICATION

3165 DEL

2 x Luxeon Rebel ES sur MCPCB - total ±8 w
 Reconnu par UL - fabriqué aux États-Unis
 752 lm (3000K) - 936 lm (4000K) initial
 95 IRC (3000K) - 85 IRC (4000K)
 Conforme
 120V - 240V
 Hatch 350 mA
 Gradation phase [DP] & Gradation 0-10V [DV]
 5 ans (sur les composantes électroniques)
 Disponible & Reconnu par CSA

3166 DEL

1 x Luxeon Rebel ES sur MCPCB - total ±4 w
 376 lm (3000K) - 468 lm (4000K) initial
 120V ou 277V
 Lighttech 350 mA

SPECIFICATIONS

SOURCE LUMINEUSE
VOLTAGE

Fluorescent (for IDH/IDHA)

CFL twin tube 13 w (x 2 pour 3165)
 120V-277V-347V
 (option de gradation disponible)

Halogen (for IDH/IMH)

Bipin 50 w (x 2 pour 3165)
 120V-277V

Incandescent (for IDH/IMH)

B10/T10 75 w (x 2 pour 3165)
 120V