







Robust and modern



Guiding lights




Anatomy



SILENE OUT
3455-KDB

DESIGNED FOR
CONÇU POUR **IP64**
CONTACT EUREKA FOR MORE INFORMATION
CONTACTEZ EUREKA POUR INFORMATION

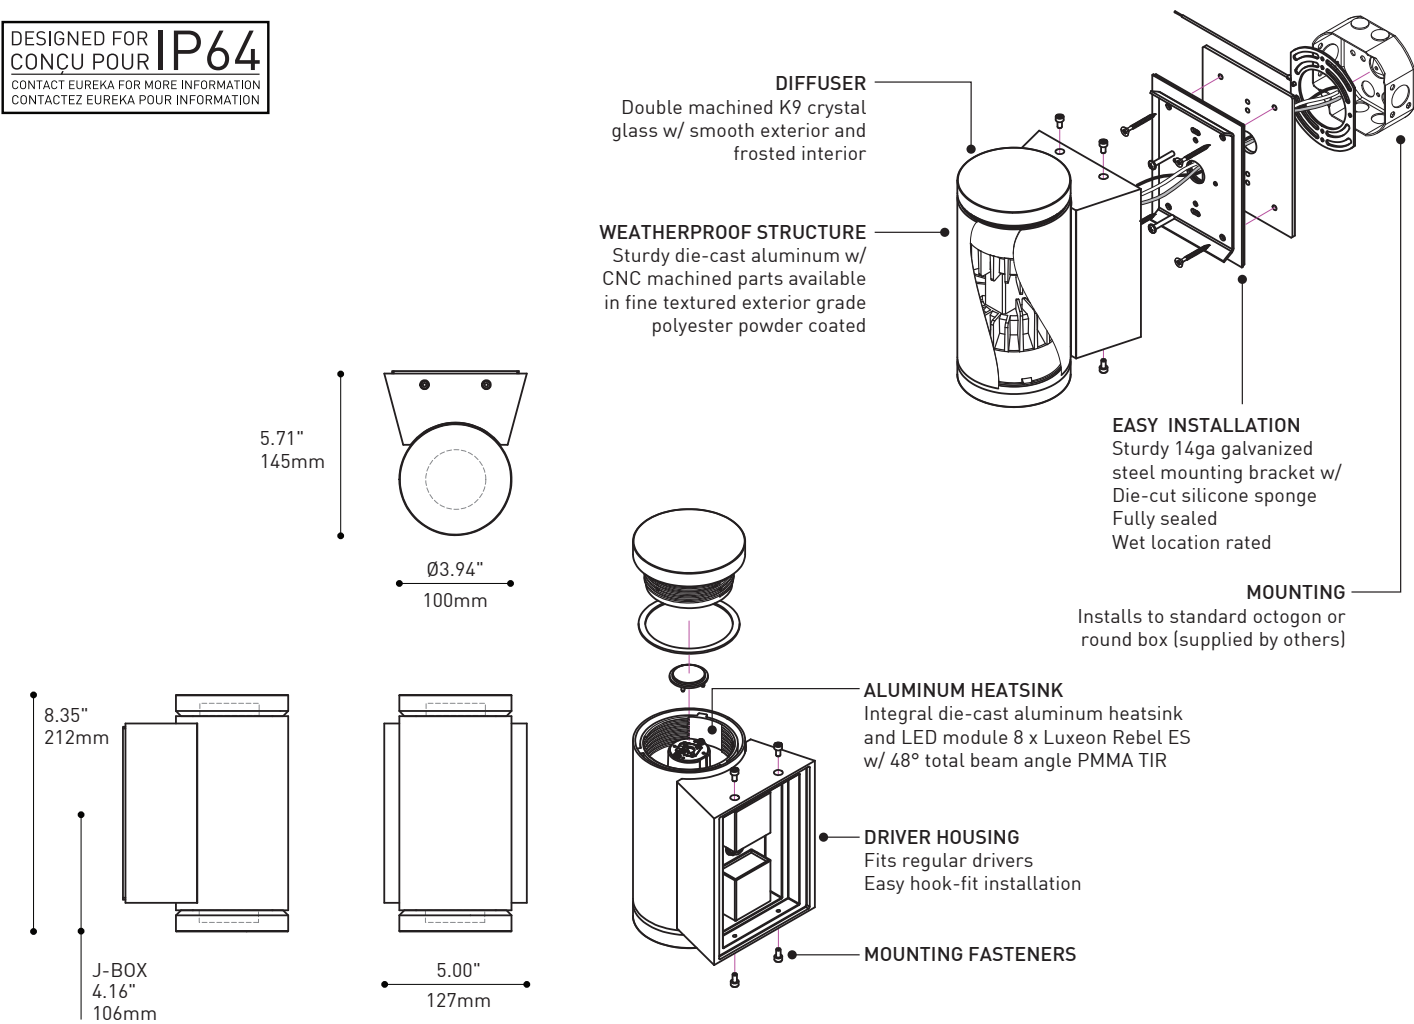


CHARACTERISTICS 3455-KDB		
LIGHT SOURCE	8 x Luxeon Rebel ES - total ± 8w or 2 x 4w	
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	575 lms (3000K) - 615 lms (4000K)	980 lms (3000K) - 1080 lms (4000K)
CRI	ANSI binned 3000K (80 CRI) & 4000K (80 CRI)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct & Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	2 x 350mA - 6W Constant Current	2 x 700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	In process / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at ¾" diffuser length for KDB option	
STRUCTURE FINISH	Fine textured anthracite exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	

Anatomy



SILENE OUT
3455-KDH

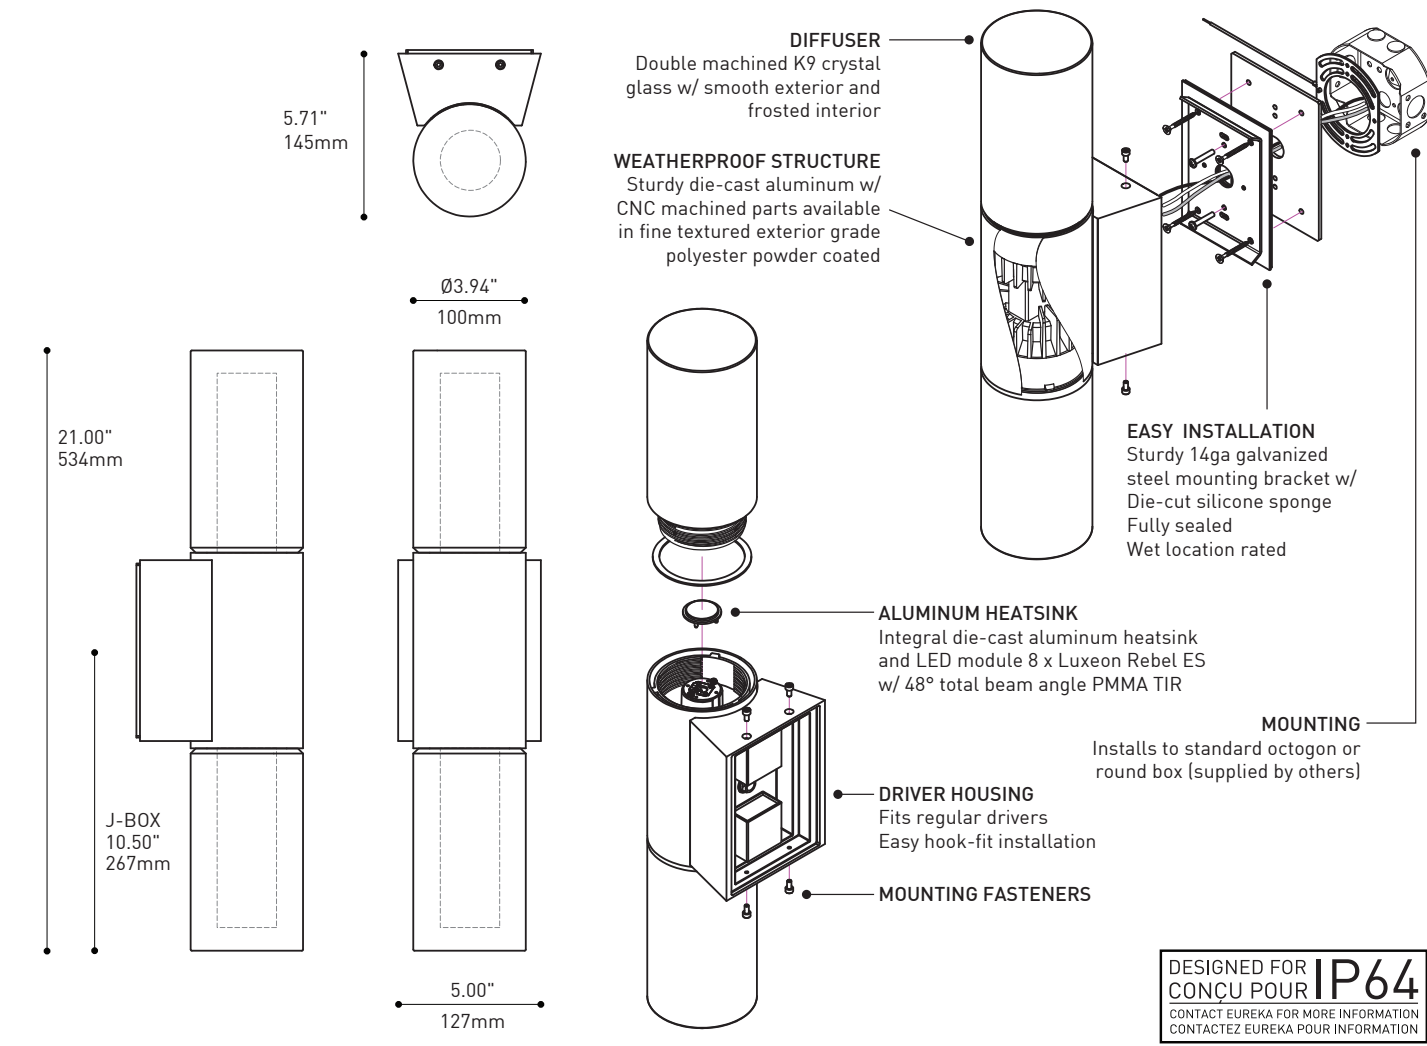

DESIGNED FOR
CONÇU POUR **IP64**
CONTACT EUREKA FOR MORE INFORMATION
CONTACTEZ EUREKA POUR INFORMATION


CHARACTERISTICS 3455-KDH		
LIGHT SOURCE	8 x Luxeon Rebel ES - total ± 8w or 2 x 4w	
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	649 lms (3000K) - 689 lms (4000K)	1110 lms (3000K) - 1210 lms (4000K)
CRI	ANSI binned 3000K (80 CRI) & 4000K (80 CRI)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct & Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	2 x 350mA - 6W Constant Current	2 x 700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	In process / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at 7" diffuser length for KDH option	
STRUCTURE FINISH	Fine textured anthracite exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	

Anatomy



SILENE OUT
3456-KDB

DESIGNED FOR
CONÇU POUR **IP64**
CONTACT EUREKA FOR MORE INFORMATION
CONTACTEZ EUREKA POUR INFORMATION

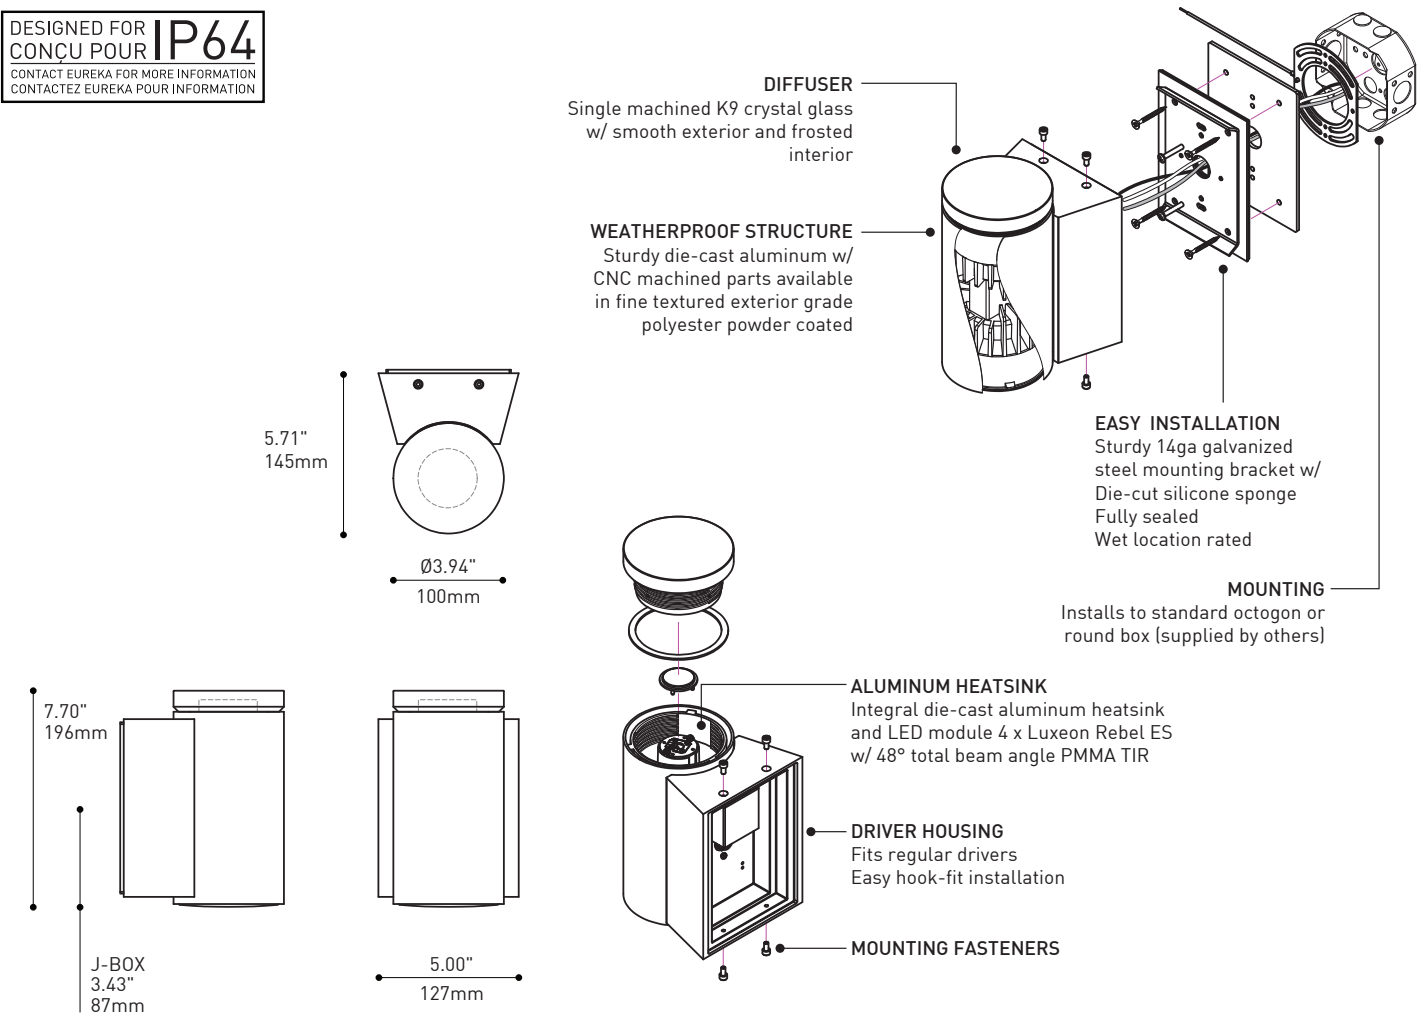


CHARACTERISTICS 3456-KDB		
LIGHT SOURCE	4 x Luxeon Rebel ES - total ± 4w	4 x Luxeon Rebel ES - total ± 8w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	286 lms (3000K) - 306 lms (4000K)	489 lms (3000K) - 539 lms (4000K)
CRI	ANSI binned 3000K (80 CRI) & 4000K (80 CRI)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct & Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	350mA - 6W Constant Current	700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	In process / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at ¾" diffuser length for KDB option	
STRUCTURE FINISH	Fine textured anthracite exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	

Anatomy



SILENE OUT
3456-KDH

DESIGNED FOR
CONÇU POUR **IP64**
CONTACT EUREKA FOR MORE INFORMATION
CONTACTEZ EUREKA POUR INFORMATION

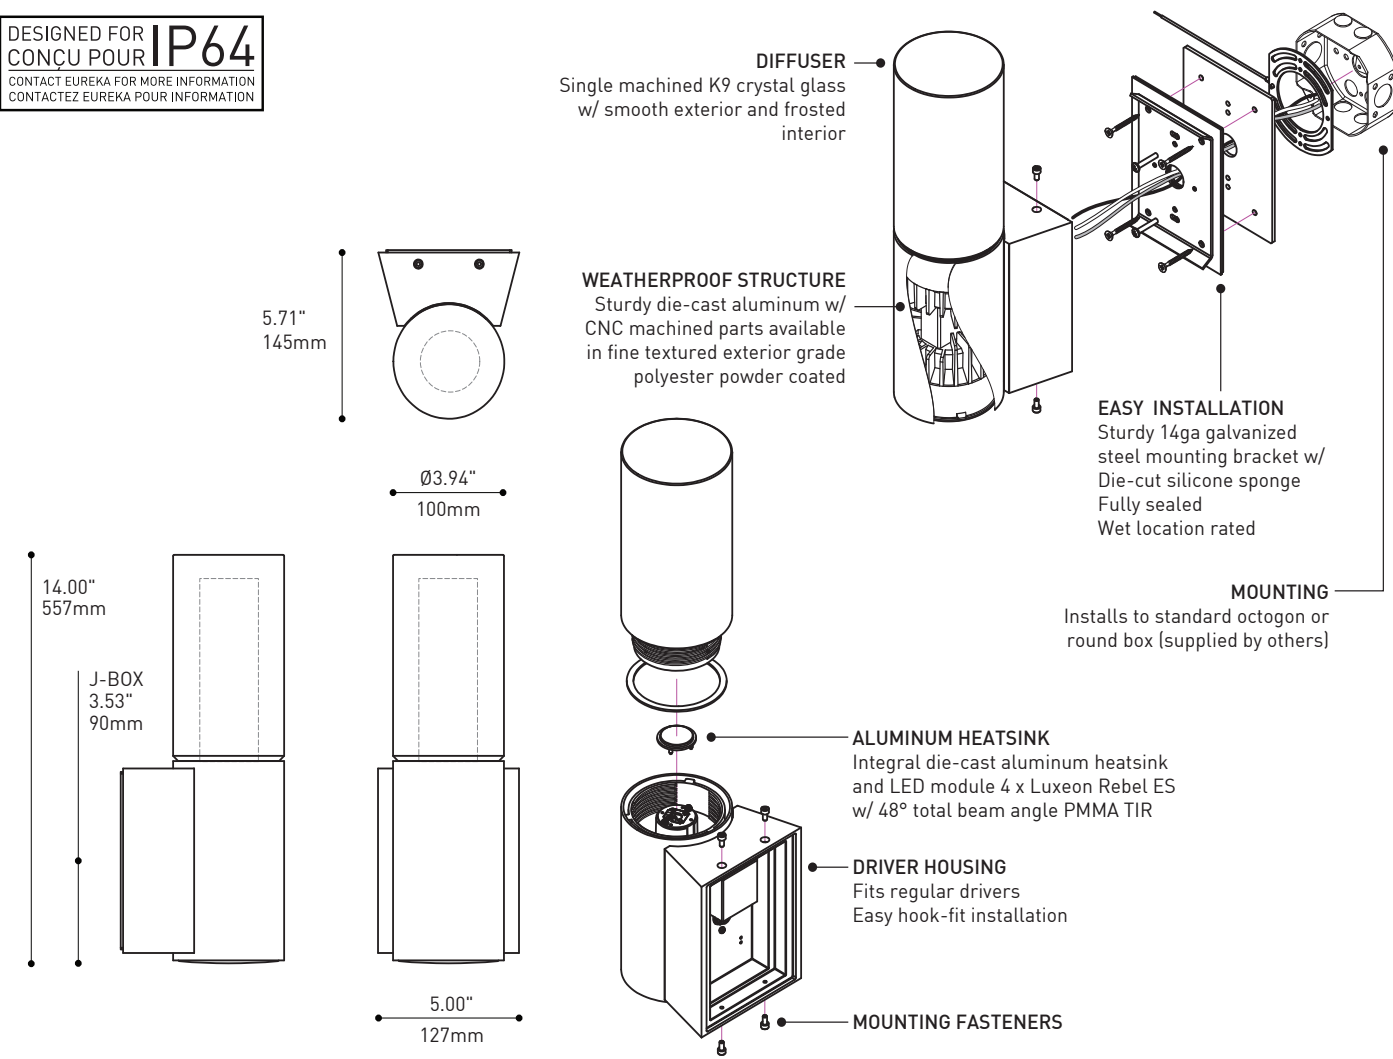

CHARACTERISTICS 3456-KDH		
LIGHT SOURCE	4 x Luxeon Rebel ES - total ± 4w	4 x Luxeon Rebel ES - total ± 8w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	325 lms (3000K) - 345 lms (4000K)	558 lms (3000K) - 608 lms (4000K)
CRI	ANSI binned 3000K (80 CRI) & 4000K (80 CRI)	
ROHS	Yes	
HEAT SINK	Die-cast aluminum, black painted	
OPTIC	Direct or Indirect - LEDIL TIR 48° total beam angle	
VOLTAGE	120V or 277V	120V only
DRIVER	350mA - 6W Constant Current	700mA - 9W Constant Current
DIMMING	N/A	
LM-79 / L70	In process / Estimated 50 000 hrs	
HOUSING STRUCTURE	Die-cast and CNC machined aluminium / die-stamped galvanized steel / die-cut silicone gaskets	
DIFFUSER	Machined K9 crystal glass with smooth exterior and frosted interior at 7" diffuser length for KDH option	
STRUCTURE FINISH	Fine textured anthracite exterior grade polyester powder coated	
ADA	Compliant	
WARRANTY	5 years	

