

BROADWAY 4211-GGU

PROJECTPROJET

SPEC TYPE

NOTES



OPTIONS



OVERALL HEIGHTHAUTEUR HORS TOUT

LIGHT SOURCE	INCTRACK 1 CIRCUIT	INC CFL GU24	LED	CFL	CFL DIM
MOUNTING	2734B	2401E	2403G	2402G	2402J
CABLE	70.65"	70.30"	70.80"	71.05"	47.55"
STEM	46.05"	45.70"	-	46.45"	46.95"

MOUNTING OPTIONSOPTIONS DE MONTAGE


				
2734B 1.46" x 1.36" 37 x 35mm	2401E Ø4.50" x 1.00" Ø114 x 25mm	2403G Ø4.50" x 1.50" Ø114 x 38mm	2402G Ø5.25" x 1.75" Ø133 x 44mm	2402J Ø5.25" x 2.25" Ø133 x 57mm
* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS				

STEM OR CABLE OPTIONSOPTIONS DE TIGE OU CABLE


STEM STD 36" 914mm	CABLE STD 60" 1523mm	3 x AC CABLE STD 60" 1523mm
		



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4211-GGU
4211-GGU	BROADWAY	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
CF.D.13*		13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE
CF.D.18*		18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE
CF.T.26*		26W, CFL, TRIPLE TWIN TUBE, G24Q3 BASE
CF.SP.26		26W, CFL, SPIRAL TUBE, GU24 BASE (120V ONLY)
INC.100		100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY)
LED.24.30*		24W, LED 3000K (WARM)
LED.24.40*		24W, LED 4000K (NEUTRAL)
*NOT AVAILABLE WITH A TRACK ADAPTOR		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V*	277 VOLT	
347V**	347 VOLT	
*NOT AVAILABLE WITH A TRACK ADAPTOR		
**ONLY AVAILABLE WITH CF.D.13, CF.D.18 AND CF.T.26 (NON-DIMMING BALLAST)		
DIMMING OPTION OPTION DE GRADATION		
AVAILABLE WITH CF.D.18 AND CF.T.26 ONLY, MAXIMUM 36" STEM / CABLE LENGTH		
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)	
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
AVAILABLE WITH LED ONLY		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
STEM OR CABLE TIGE OU CABLE		
S6*	1/4" (6MM) STEM, FIELD ADJUSTABLE (NOT AVAILABLE WITH CFL LAMPS)	
S10*	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE (FOR CFL LAMPS ONLY)	
C*	CLEAR CABLE, FIELD ADJUSTABLE	
AC**	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE (FOR LED LAMPS ONLY)	
*NOT AVAILABLE WITH LED LIGHT SOURCE		
**NOT AVAILABLE WITH A TRACK ADAPTOR		
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE		
36	36" STEM (STD LENGTH)	
60	60" CABLE OR AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)	
**	CUSTOM CABLE OR AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE		
RC		ROUND CANOPY / PAVILLON ROND FOR INC & CFL GU24: 1" CANOPY (2401E) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL: 2.25" CANOPY (2402J) FOR DIMMING LED: 1.50" CANOPY (2403G)
TA1		TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT INC 120V ADAPTOR (2734B)
MOUNTING OPTION OPTION DE MONTAGE		
SCA*	SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)	
*ONLY AVAILABLE WITH A STEM		
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL ^(A)		
WH	WHITE	
BLK	BLACK	
M G	METALLIC GRAY	
^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY		
STRUCTURE FINISH FINI STRUCTURE ^(B)		
S C	SATIN CHROME	
BLK	BLACK	
CHR	CHROME	
WH	WHITE	
^(B) INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED		
SHADE FINISH FINI ABAT-JOUR		
WH3	WHITE - LINEN	
WJ4	WHITE - FABRIC BOX	
WLT	WHITE - LINEN TRILAM	
GLT	GRAY - LINEN TRILAM	
ACRYLIC FINISH FINI ACRYLIQUE		WH
WH	WHITE	

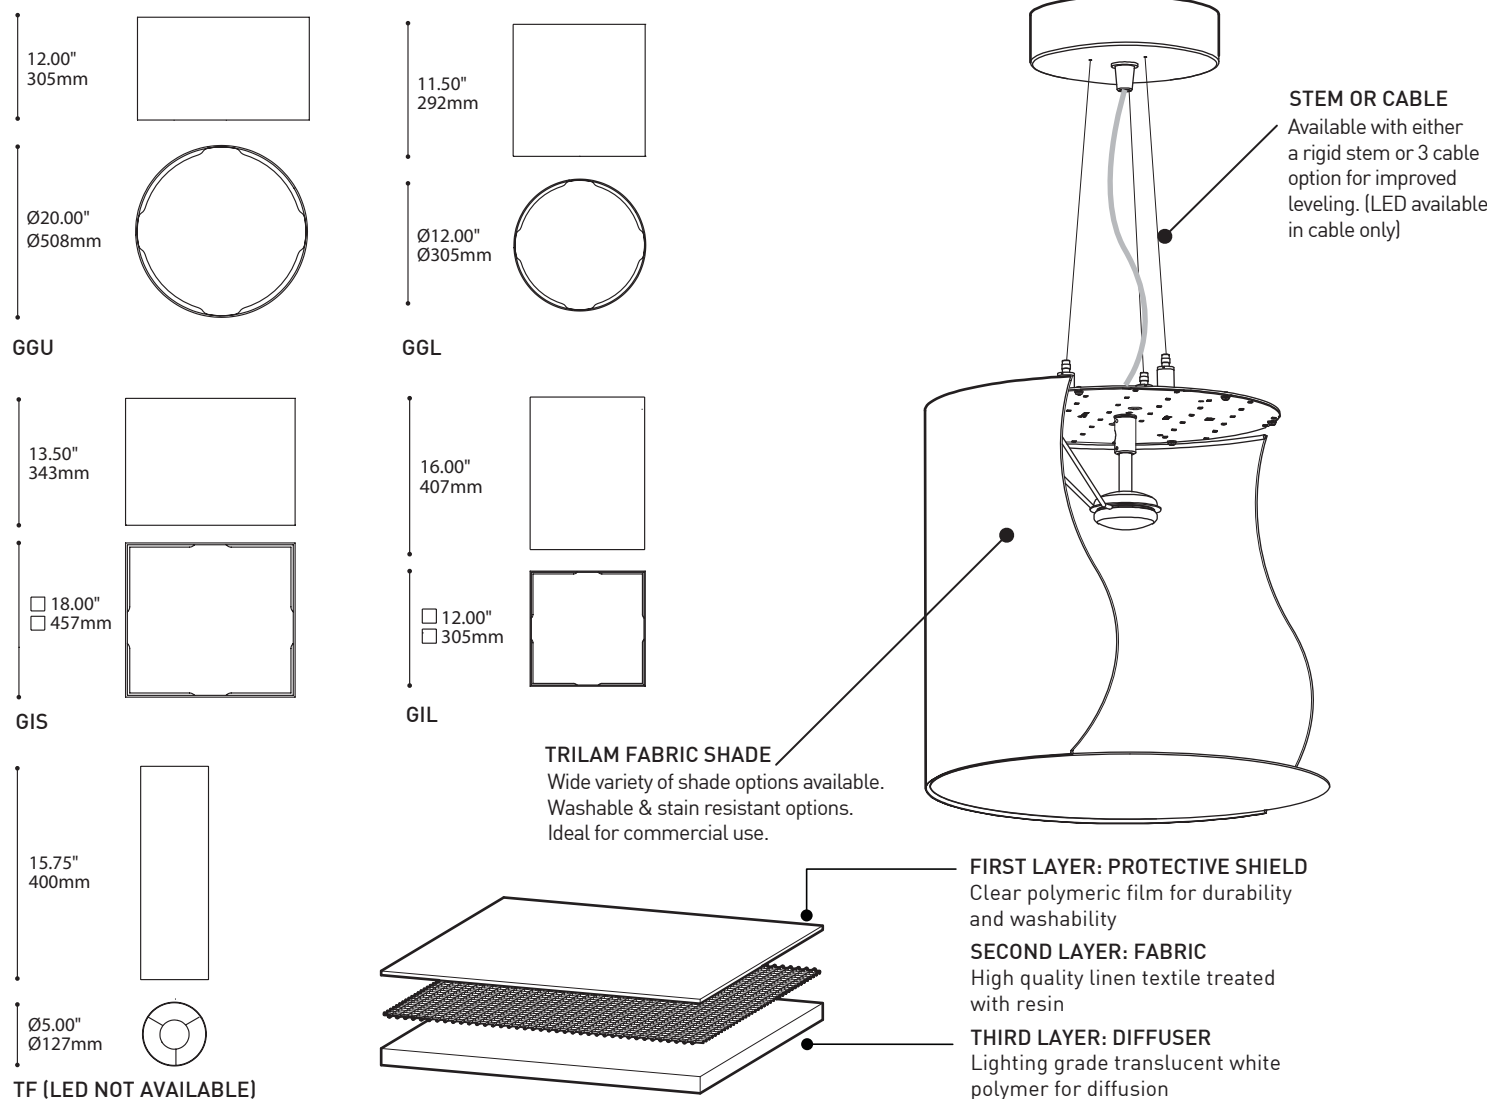

SPECIFICATIONS	TF	GGL GIL	GGU GIS
LIGHT SOURCES	CF.D.13 CF.D.18 CF.T.26 CF.SP.26 INC.40	LED.10.30 LED.10.40 CF.D.13 CF.D.18 CF.T.26 CF.SP.26 INC.100	LED.24.30 LED.24.40 CF.D.13 CF.D.18 CF.T.26 CF.SP.26 INC.100
DIMMING OPTIONS	DV 0-10V (120-277V), DP PHASE DIMMING (120V), DED, DE3		
VOLTAGE	120V, 277V, 347V (277 not available with track adapter, 347 only with CF)		
LIGHT DISTRIBUTION	Direct and indirect (LED only provides semi-direct)		
STRUCTURE FINISH	Satin chrome, Chrome, Black, White		
SHADE FINISH	White linen, White linen trilam, White fabric box, Gray linen trilam		
DIFFUSER	Acrylic diffuser for LED version		
CERTIFICATION	c-CSA-us , c-UL-us (F.T5.C Circline only)		
WARRANTY	5 year warranty on LED fixture, 2 year warranty on FLOU fixtures		

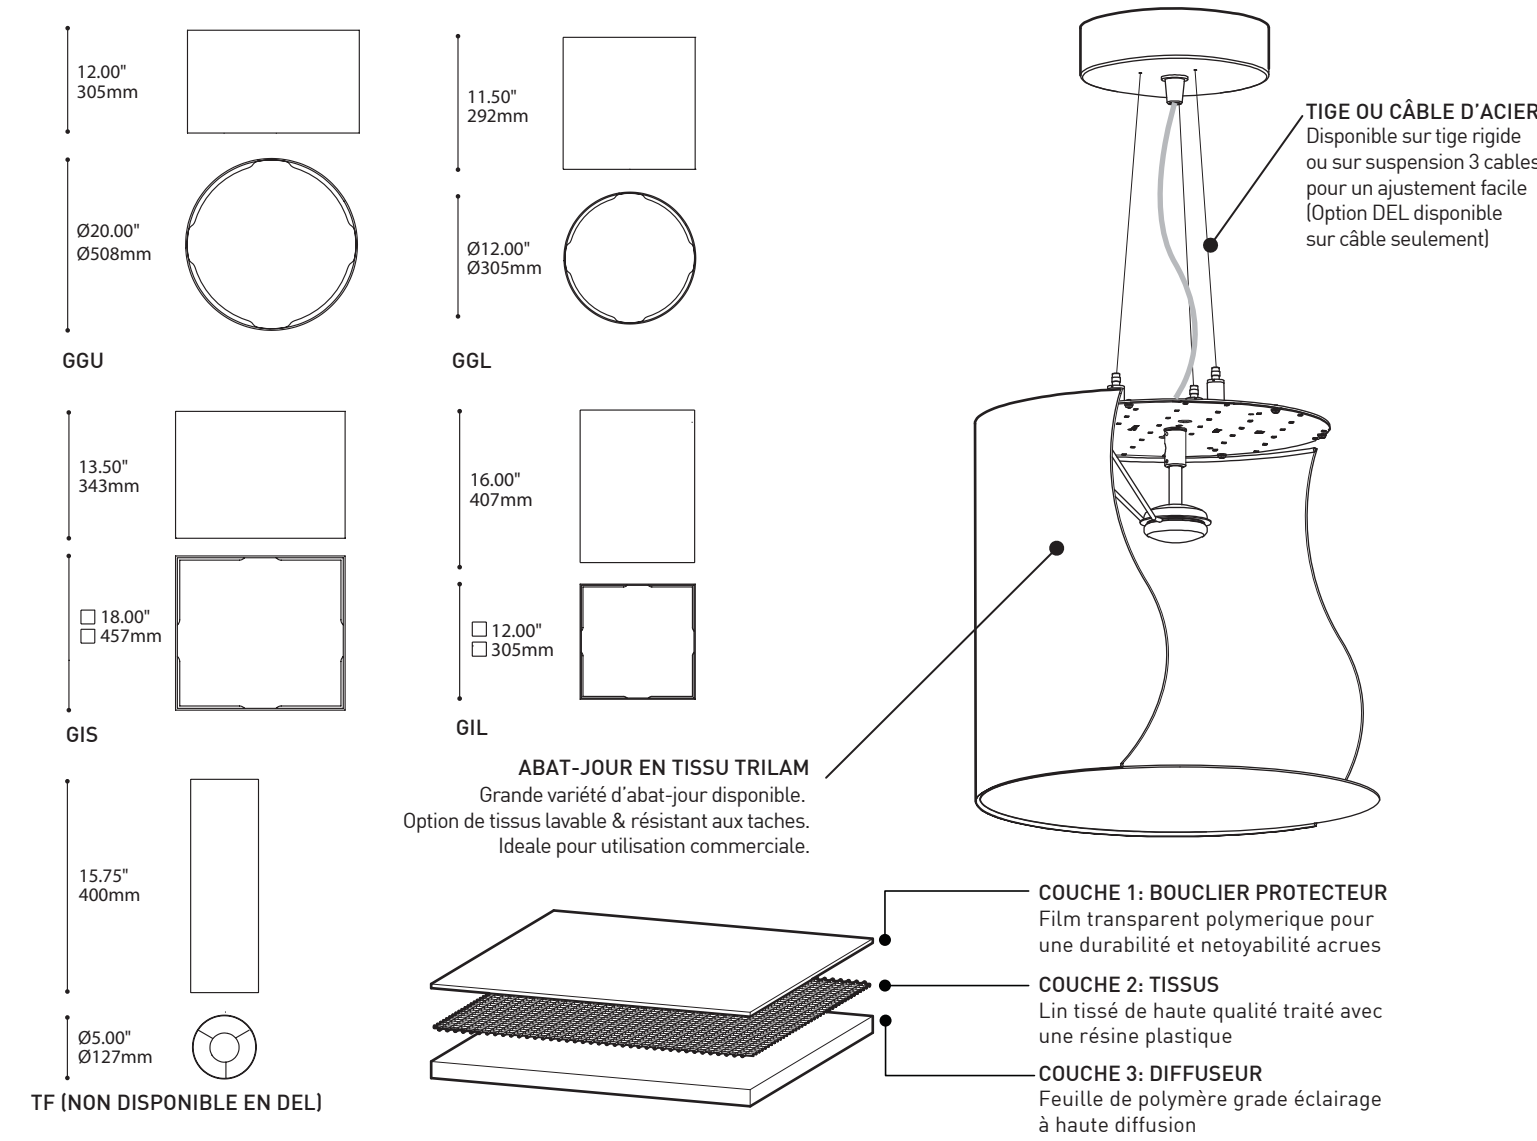

15.75"
400mm

Ø5.00"
Ø127mm

TF (NON DISPONIBLE EN DEL)

16.00"
407mm

12.00"
305mm

GIL

ABAT-JOUR EN TISSU TRILAM

Grande variété d'abat-jour disponible.
Option de tissus lavable & résistant aux taches.
Idéale pour utilisation commerciale.

COUCHE 1: BOUCLIER PROTECTEUR

Film transparent polymérique pour une durabilité et netoyabilité accrues

COUCHE 2: TISSUS

Lin tissé de haute qualité traité avec une résine plastique

COUCHE 3: DIFFUSEUR

Feuille de polymère grade éclairage à haute diffusion

TIGE OU CÂBLE D'ACIER

Disponible sur tige rigide ou sur suspension 3 câbles pour un ajustement facile (Option DEL disponible sur câble seulement)

SPECIFICATIONS	TF	GGL GIL	GGU GIS
SOURCE LUMINEUSE	CF.D.13 CF.D.18 CF.T.26 CF.SP.26 INC.40	LED.10.30 LED.10.40 CF.D.13 CF.D.18 CF.T.26 CF.SP.26 INC.100	LED.24.30 LED.24.40 CF.D.13 CF.D.18 CF.T.26 CF.SP.26 INC.100
OPTIONS DE GRADATION	DV 0-10V (120-277V), GRADATION DP PHASE (120V), DED, DE3		
VOLTAGE	120V, 277V, 347V (277V non disponible sur système de rail, 347V seulement avec source CF)		
DISTRIBUTION LUMINEUSE	Directe et indirecte (semi-directe seulement pour l'option DEL)		
STRUCTURE	Satin chrome, Chrome, Noir, Blanc		
ABAT-JOUR	Lin tissé blanc, Lin tissé blanc TRILAM, Tissu blanc, Lin gris TRILAM		
DIFFUSEUR	Diffuseur en acrylique pour l'option DEL		
CERTIFICATION	c-CSA-us , c-UL-us (F.T5.C Circulaire seulement)		
GARANTIE	Garantie de 5 ans sur le luminaire en DEL, Garantie de 2 ans sur les luminaires en fluorescent		