

OOB 4223-UGL

PROJECTPROJET

SPEC TYPE

NOTES



OVERALL HEIGHTHAUTEUR HORS TOUT


LIGHT SOURCE	INC-HAL GU24	CFL	CFL DIM
MOUNTING	2401E	2402G	2402J
CABLE	71.00"	71.75"	48.25"

MOUNTING OPTIONSOPTIONS DE MONTAGE

2401E Ø4.5" x 1" Ø114 x 25mm	2402G Ø5.25" x 1.75" Ø133 x 44mm	2402J Ø5.25" x 2.25" Ø133 x 57mm

STEM OR CABLE OPTIONSOPTIONS DE TIGE OU CÂBLE

2 x AC CABLE STD 60" 1523mm	
-----------------------------------	--

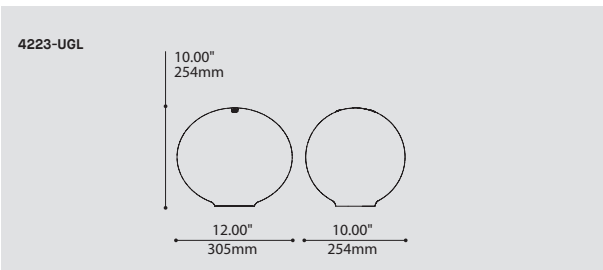

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4223-UGL
4223-UGL OOB		
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
CF.T.26		26W, CFL, TRIPLE TWIN TUBE, G24Q3 BASE
CF.SP.26		26W, CFL, SPIRAL TUBE, GU24 BASE (120V ONLY)
BIPIN.50		50W, HAL, BIPIN, GY6.35 BASE
G9.60		60W, HAL, T4, G9 BASE (120V ONLY)
INC.100		100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY)
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
347V*	347 VOLT	
*ONLY AVAILABLE WITH CF.T.26 (NON-DIMMING BALLAST)		
DIMMING OPTION OPTION DE GRADATION		
AVAILABLE WITH CF.T.26 ONLY		
MAXIMUM 36" AIRCRAFT CABLE LENGTH		
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)	
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
CABLE CABLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND	
		
	FOR INC, HAL & GU24: 1" CANOPY (2401E)	
	FOR CFL: 1.75" CANOPY (2402G)	
	FOR DIMMING CFL: 2.25" CANOPY (2402J)	
STRUCTURE FINISH FINI STRUCTURE		CHR
CHR	CHROME	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES

DESIGN:	Elliptical wonder of balance and form as it pivots on two support cables, repositioning the off-center opening.
INSTALLATION:	Easy to install and adjust, double aircraft cable mounting.
LIGHT SOURCE:	Compact fluorescent as well as dimmable halogen and incandescent light sources available.
STRUCTURE:	Die-formed steel canopy with machined fittings. Available in chrome finish.
DIFFUSER:	White hand blown and cut triplex glass diffuser.
CERTIFIED:	c-CSA-us
CONCEPTION:	Chef d'oeuvre elliptique et équilibré pivotant sur deux câbles de suspension, repositionnant l'ouverture décentrée.
INSTALLATION:	Facile à installer et à ajuster sur câble d'acier double.
SOURCE LUMINEUSE:	Fluorescent compact ainsi qu'halogène et incandescent à intensité variable.
STRUCTURE:	Pavillon d'acier embouti et usiné. Disponible en fini chromé.
DIFFUSEUR:	Diffuseur en verre triplex blanc soufflé et taillé à la main.
CERTIFIÉ:	c-CSA-us