
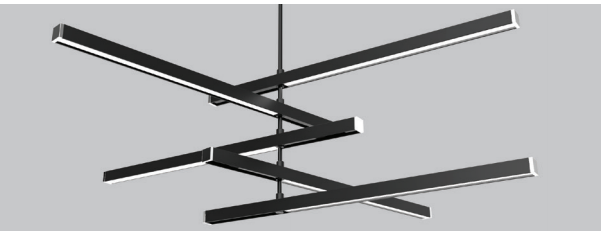


SWITCH 7470X

PROJECT PROJÉT

SPEC TYPE


NOTES

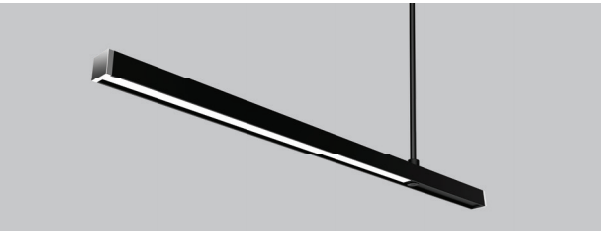


END CAP DETAIL



MIDDLE STEM DETAIL



BOTTOM CAP DETAIL

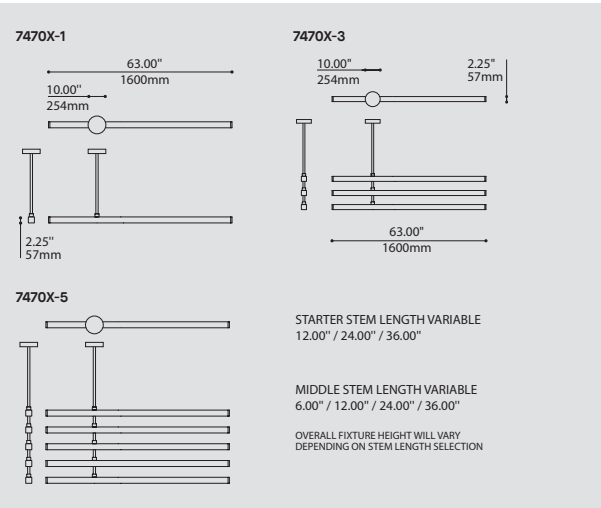

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
MODEL	MODÈLE		
7470D	SWITCH (PENDANT, DIRECT)		
7470I	SWITCH (PENDANT, INDIRECT)		
ARM QUANTITY	QUANTITÉ BRAS		
1	1 ARM		
3	3 ARMS		
5	5 ARMS		
LIGHT SOURCE	SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)			
LED.21.30*	21W, LED 3000K (WARM)		
LED.21.40*	21W, LED 4000K (NEUTRAL)		
	*PER ARM		
VOLTAGE	VOLTAGE		
120V	120 VOLT		
277V	277 VOLT		
DIMMING OPTION	OPTION DE GRADATION		DV
DV	0-10V DIMMING (120-277V)		
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT		
STEM	TIGE		S7
S7	27/32", (21MM) STEM, NOT FIELD ADJUSTABLE		
STEM STARTER LENGTH	LONGUEUR DE TIGE DÉBUT		
12	12" STEM		
24	24" STEM		
36	36" STEM		
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MIDDLE STEM LENGTH	LONGUEUR DE TIGE DU MILIEU ^(A)		
6	6" STEM		
12	12" STEM		
24	24" STEM		
36	36" STEM		
	^(A) ALL MIDDLE STEMS WILL BE THE SAME LENGHT		
STRUCTURE FINISH	FINI STRUCTURE		
BLK	BLACK		
WH	WHITE		
END CAP FINISH	FINI EMBOUT		CHR
CHR	CHROME		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM


DIM

IES

LED


350°

DESIGN:	Functionally luxurious, this expandable luminaire system marries a minimal aesthetic with elegant technology to provide a highly versatile and unique lighting experience.
SYSTEM:	Arm quantity and stem lengths can be specified to create fixtures as big as required, with the individual arms installed to provide direct or indirect light. Each arm has its own precision balance control, and an intelligent bearing component that facilitates 350-degree arm rotation.
LIGHT SOURCE:	Each arm conceals a custom designed 21W LED module and 0-10V dimmable driver.
STRUCTURE:	The precision aluminum body, heavy gauge mounting bracket and thick-walled steel stem is powder coated white or black and complemented by chrome end caps.
DIFFUSER:	Recessed back from the opening aperture, the extruded high performance lens seems to float in the housing. Using custom blended PMMA and an added holographic diffuser film, Switch offers efficient yet fully diffused surface illumination.
CERTIFIED:	c-CSA-us
CONCEPTION:	Luxeux et fonctionnel, ce luminaire modulable allie minimalisme et élégance technologique pour offrir une expérience d'éclairage unique et polyvalente.
SYSTÈME:	En agencant plusieurs bras à des longueurs de tige sur mesure, ce luminaire devient aussi polyvalent que souhaité permettant aussi de créer un éclairage direct ou indirect. Chacun des bras possède un mécanisme précis d'ajustement de la stabilité en plus d'être muni d'un système de roulement à bille qui facilite la rotation individuelle de 350°.
SOURCE LUMINEUSE:	Chaque bras est muni d'une série de modules DEL de 21W et d'un pilote à gradation 0-10V intégré.
STRUCTURE:	Corps d'aluminium de précision, plaque de montage de gros calibre et tige d'acier à parois épaisses; peinture en poudre noir ou blanche complétement par des embouts chromés.
DIFFUSEUR:	La lentille extrudée de haute performance est encastrée en retrait dans l'extrusion, paraissant flotter. En combinant une lentille de PMMA faite sur mesure et un film diffuseur holographique, Switch produit un éclairage à la fois efficace et diffus.
CERTIFIÉ:	c-CSA-us

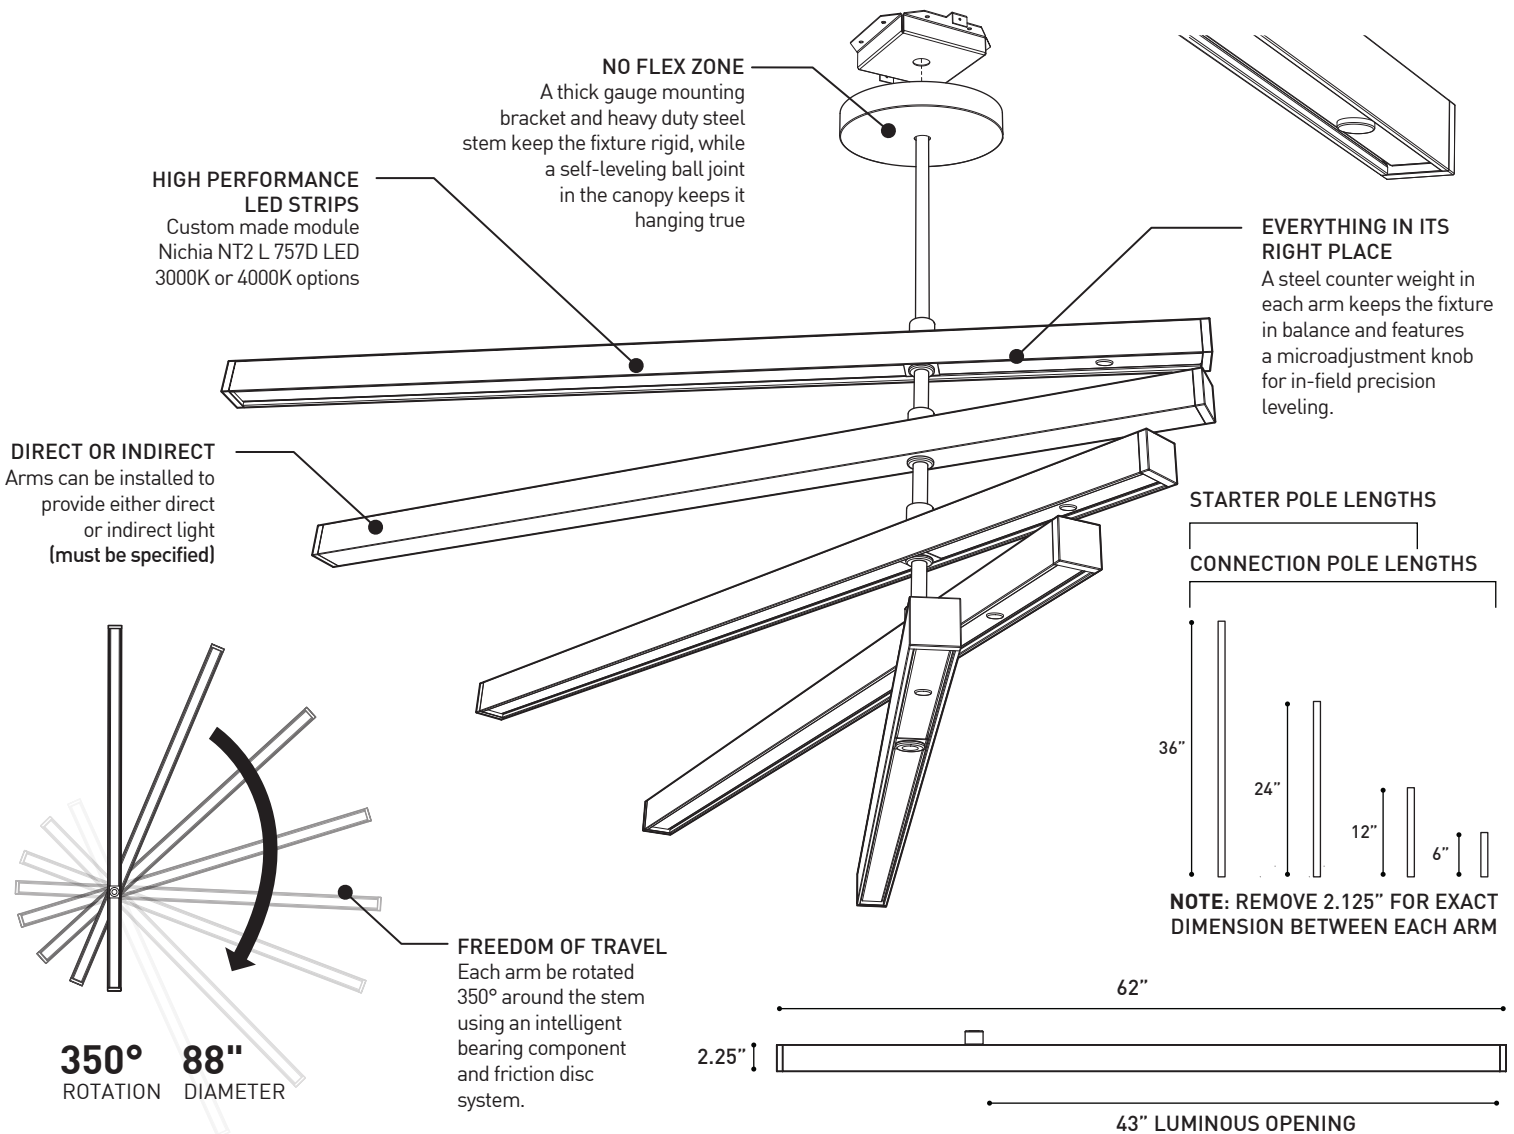

CHARACTERISTICS 7470X

LIGHT SOURCE	36 x Nichia NT2 L 757D ± 21 w (per arm)
MODULE	UL Recognized
DELIVERED LUMENS	~1465lm (3000K) / 1511lm (4000K)
CRI	85 CRI (3000K) / 85 CRI (4000K)
LIGHT DISTRIBUTION	Direct or Indirect (specified when ordering)
FINISHES	Black or white powder coated finish
FIXTURE HOUSING	Extruded aluminum (2.4mm thickness)
ENDCAPS	Chromed machined aluminum endcaps
STEM	Thick walled steel machined stems in four different lengths
MOUNTING BRACKET	16 gauge cold rolled steel with 8 screw mounting holes
LENS	Optifuse acrylic tolerance freindly floating lens
VOLTAGE	120V - 277V
DRIVER (DV DIMMING)	Meanwell 12CV 0-10V Dimming (standard one per arm)
LM-79	In process
WARRANTY	5 years

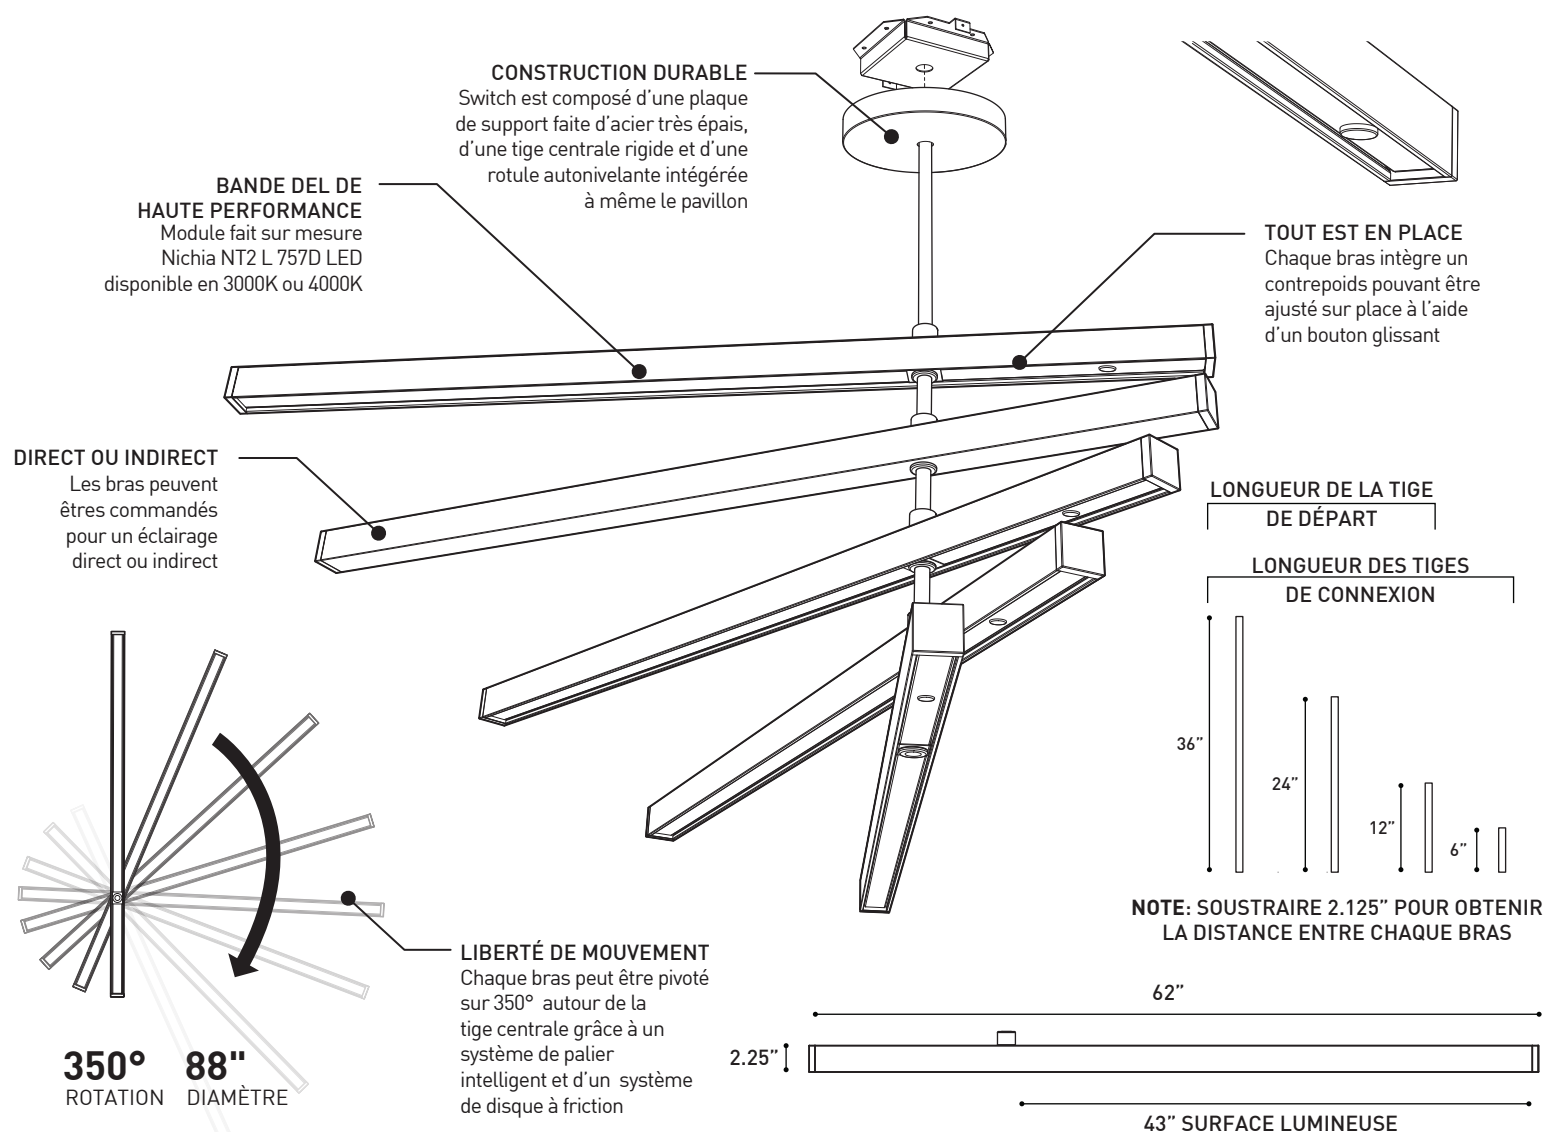

CARACTÉRISTIQUES 7470X

SOURCE LUMINEUSE	36 x Nichia NT2 L 757D ± 21 w (par bras)
MODULE	Reconnu par UL
LUMENS RÉELS	~1465lm (3000K) / 1511lm (4000K)
IRC	85 IRC (3000K) / 85 IRC (4000K)
DISTRIBUTION LUMINEUSE	Lumière directe ou Indirecte
FINITION	Peinture en poudre noir ou blanc
BOÎTIER	Extrusion d'aluminium (épaisseur de 2.4mm)
EMBOUTS	Embout usinés et chromés
TIGE	Tige d'acier aux parois très épaisses disponible en 4 longueurs
PLAQUE DE SUPPORT	Acier laminé à froid de calibre 16 avec trous d'installation pour 8 vis
LENTILLE	Acrylique Optifuse haute performance
TENSION	120V - 277V
PILOTE (GRADATION DV)	Meanwell 12CV gradation 0-10V (standard)
LM-79	En cours
GARANTIE	5 ans