


Notes:

Job:

Type:

95 LINE LED STEPLIGHTS




The Gardco 95 Line LED steplights are architecturally styled luminaires of minimal scale, precisely constructed of diecast brass and molded plastic. The 95 Line was specifically designed for use with LEDs and all types of wall construction. A choice of four (4) architectural shapes allows for a wide variety of applications, both inside and outside buildings.

ORDERING


PREFIX	MOUNTING	WATTAGE	VOLTAGE	LED COLOR	FINISH
<input type="text"/>					

Enter the order code into the appropriate box above. Note: Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.


PREFIX

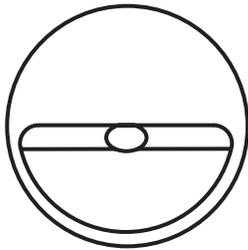


950 Round

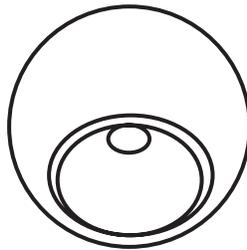

951 Round

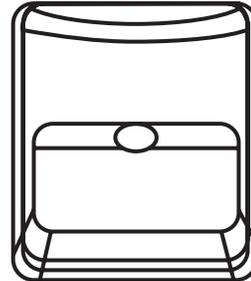

952 Square

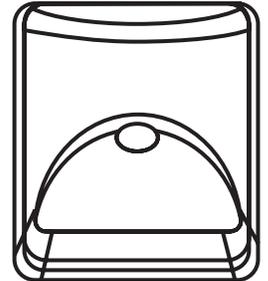

953 Square

MOUNTING

S Surface mount for wall or ceiling

VOLTAGE

12 12 volts

120 120 volts

WATTAGE

1 1 watt

3 3 watt

LED COLOR

1 Watt

LEA Amber

LEB Blue

LEG Green

LEO Orange

LER Red

LEW White

3 Watt

LEB Blue

LEG Green

LEW White

FINISH

BLP Black *Standard material color*

BRP Bronze Paint

WP White Paint

OC Optional Color Paint
*Specify RAL designation
ex: OC-RAL7024)*

SC Special Color Paint
Specify. Must supply color chip

© Copyright Gardco Lighting 2004. All Rights Reserved. International Copyright Secured. Gardco Lighting reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

A Genlyte Company

Gardco Lighting
2661 Alvarado Street
San Leandro, CA 94577

800/227-0758
510/357-6900 in California
Fax: 510/357-3088
www.sitelighting.com



**GARDCO
LIGHTING**

79115-138/1104

95 LINE

LED STEPLIGHTS

SPECIFICATIONS

GENERAL DESCRIPTION: The Gardco 95 Line LED steplights are architecturally styled luminaires of minimal scale, precisely constructed of diecast brass and molded plastic. The 95 Line was specifically designed for use with LEDs and all types of wall construction. A choice of four (4) architectural shapes allows for a wide variety of applications, both inside and outside buildings.

COVER: The housing cover is molded using high impact resistant, UV stabilized, thermoplastic with an integral, textured surface. Cover is secured to the housing with a hex socket set screw.

POWER-PACK BASE ASSEMBLY:

Base Assembly: The mounting base is constructed of one-piece diecast brass and is suitable for mounting over a recessed 3 1/2" or 4" octagonal or 4" square recessed outlet box (supplied by others.) A separate mounting plate is supplied for mounting to a recessed 4" square outlet box.

The mounting base includes an integral bubble level to assist in leveling the luminaire.


Power-Pack: The encapsulated power components (LED and lens) are integrally molded in the mounting base creating a permanently assembled Power-Pack. The permanent Power-Pack includes a single, 1 watt or 3 watt LED attached to a dual-voltage power supply. A clear, custom-tailored, free form optical lens surrounds the LED. The complete Power-Pack is replaced at end of LED life.

ELECTRICAL: Luminaires accept either 120 volt AC power or 12 volt AC/DC. Input wattage for 120 volt is 2.4 watts. Input wattage for 12 volt AC/DC is 1.8 watts.

FINISH: Black (BLP) is permanently molded into the housing cover. All other colors are painted using a semi-gloss, liquid polyurethane finish. ALL finishes are textured.

LABELS: All luminaires bear U.L. or C.U.L. (where applicable) Wet Location labels.

DIMENSIONS

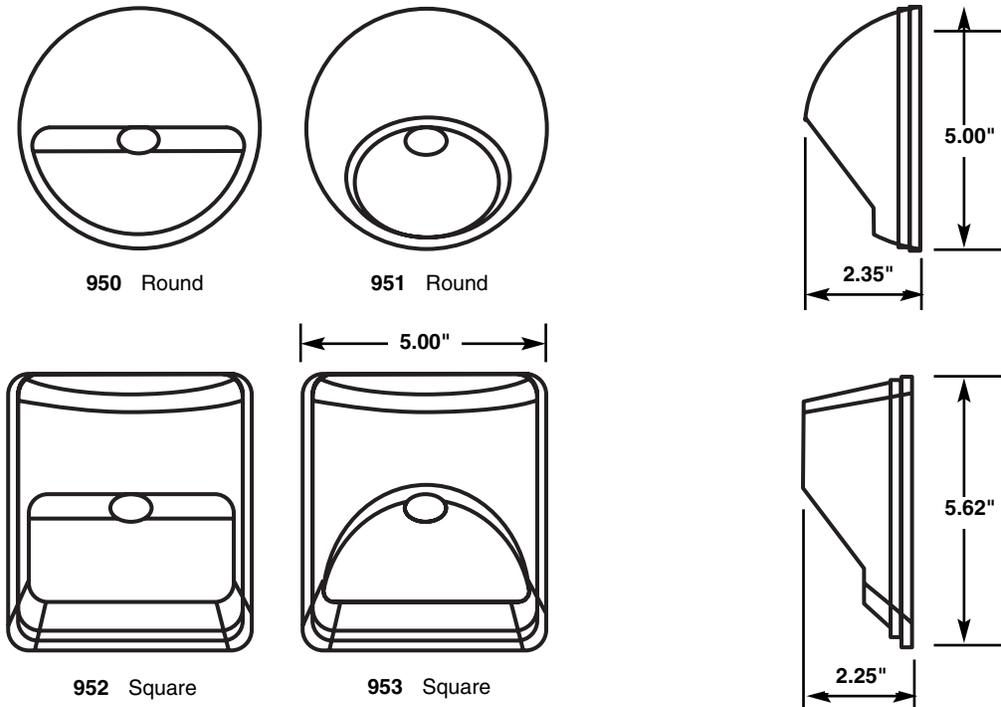

WEIGHT: 1 #, 10 oz.

© Copyright Gardco Lighting 2004. All Rights Reserved. International Copyright Secured. Gardco Lighting reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

A Genlyte Company

Gardco Lighting
2661 Alvarado Street
San Leandro, CA 94577

800/227-0758
510/357-6900 in California
Fax: 510/357-3088
www.sitelighting.com



79115-138/1104