

DESCRIPTION

The Traditionaire™ luminaire displays the old-fashioned charm of traditional area lighting, enhancing any setting with a distinctive styling. UL listed and CSA certified for wet locations.

As a decorative luminaire, the Traditionaire luminaire tastefully complements the architectural and environmental design of parks and roadways.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

HOUSING + COVER: Hinged (stainless steel hinge pins) die-cast aluminum housing and cover with cupola. Standard color is black polyester powder coat. Other finish colors available. Consult your Streetworks representative. 1" ANSI wattage/source label.

Optical

REFRACTOR: Injection molded acrylic refractor panels.

Electrical

SOCKET: Mogul-base porcelain socket. (50-150W MH is medium-base socket standard). **BALLAST:** Ballast assembly with encapsulated starter (where used). Tunnel type compression terminal lugs.

Mounting

Self-aligning pole-top fitter fits 3" O.D. pole tops or vertical tenons. Square headed 1-1/4" polymer coated mounting bolts with a lock nut.

Finish

Standard polyester powder coat finish in black. For more color options see optional color or consult your Streetworks representative for more information.




UTR TRADITIONAIRE

Pulse Start Metal Halide
High Pressure Sodium
Metal Halide

DECORATIVE LUMINAIRE

DIMENSIONS

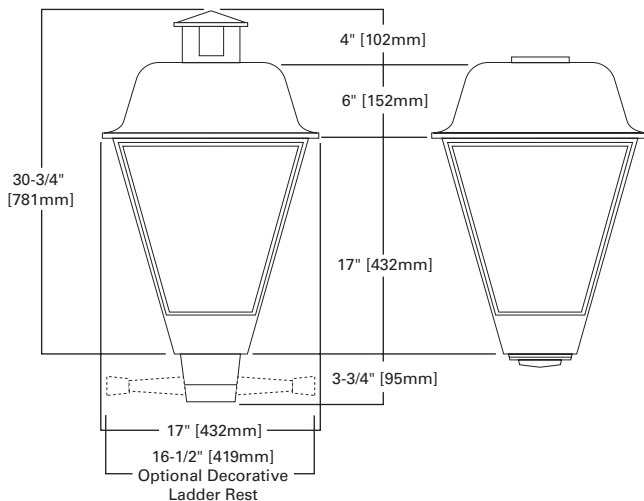

EPA

Effective Projected Area:
2.3 Square Feet

SHIPPING DATA

Approximate Net Weight:
37 lbs. (17 kgs.)

ORDERING INFORMATION

Sample Number: UTR50SR2554

Product Family	Lamp Wattage ¹	Lamp Type ¹	Ballast Type ¹	Voltage ¹	Distribution
UTR=Traditionaire	Pulse Start Metal Halide ² 70=70W 10=100W 15=150W 17=175W 25=250W High Pressure Sodium 50=50W 70=70W 10=100W 15=150W ³ 17=175W 20=200W 25=250W Metal Halide (Probe Start) ^{2,4} 17=175W 25=250W	P =Pulse Start Metal Halide S =High Pressure Sodium M =Metal Halide ²	C =CWI H =Reac./HPF N =Hi. Reac./NPF P =Hi. Reac./HPF R =Hi. Reac./NPF W =CWA	2 =120V 0 =208V 4 =240V 7 =277V 8 =480V 9 =347V W =Multi-Tap wired 120V V =Multi-Tap wired 240V N =Multi-Tap wired 277V	22 =Type II 33 =Type III ⁵ 55 =Type V
Options (Add as Suffix)				Accessories (Order Separately)	
CEC =California Title 20 Compliant Ballast 4 =NEMA Photocontrol Receptacle H =Plug-In Starter Receptacles W =20" #10 Leads P =Polycarbonate Lens Panels T =3/4" Pendant Mount Provision S =Snap Latches for Tool-less Lamp Replacement E =Factory Installed Cupola Cover with Cast Aluminum Eagle J =Factory Installed Ladder Rest U =UL/CSA Listed B =House Side Shield AP =Grey BK =Black BZ =Bronze WH =White				OA1219 =TufGuard Vandal Shield TA1BK =Decorative Ladder Rest for Field Installation	

Notes:

1. Consult your Eaton's Cooper Lighting business representative for lamp/ballast voltage compatibility.

2. Medium-base porcelain socket standard - 150W and below.

3. 150W Units are for S55 Lamps.

4. Probe Start Metal Halide available for non-US markets only (175W).

5. Requires use of coated lamp to achieve Type III distribution.