

CYLINDRIX® MULTIPLE SEMI-RECESSED 1 LIGHT

CYLSR-1
1LT MR16

APPLICATION:

Accent and display lighting for retail, commercial and hospitality environments

CONSTRUCTION:

Stamped steel mounting frame with integral mounting bars
Thermally protected
Steel ballast housing
Electronic ballast
Steel upper housing and laser cut trim ring
Die-cast lamp housing
Formed aluminum yoke
GU5.3 bi-pin socket
Powder coat paint

OPTICS:

0-50° tilt, 360°+ rotation
MR16 12v bi-pin base, 37w max.
Solite beam softening lens

MOUNTING:

For use in T-grid or sheet rock ceilings

LABELING:




Damp location





PROJECT:

TYPE:

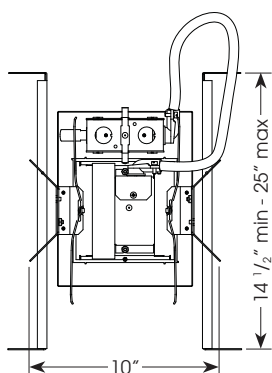

Ceiling Cut Out Dimension: 5 9/16" x 5 9/16"

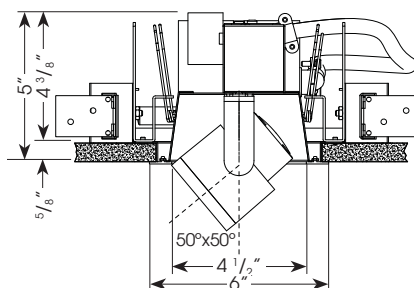

ELECTRICAL

Ballast		Lamping	
		Input	
		Watts	Amps*
Electronic	120v	37	.31
	277v	37	.13

1 MR16, GU5.3 bi-pin base, 37w max

ORDERING INFORMATION:

Model	# Lamps	Wattage	Lamp Type	Ballast	Housing/Head Finish	Voltage	Trim Ring Finish	Options/Accessories
CYLSR	1	37	MR16 (37w max)	E - electronic	WT - white texture BT - black texture ST - silver texture — (other RAL)	120 277	WT - white texture	HEX - hexcell louver SN - snoot (1/2" length standard), specify color (WT, BT, ST) CB - cross blade, specify color (BT), black texture standard CP - Chicago Plenum

Note: Cross Blade requires snoot be specified.

Example: CYLSR-1-37-MR16-E-WT-120-WT

Cat #:

Amerlux® reserves the right to change details that do not affect overall function and performance.

Amerlux®, LLC • 178 Bauer Drive, Oakland, NJ 07436 • P: 973.882.5010 F: 973-882.2605 • www.amerlux.com

LIT-0535 rev 6/12

