Luminous SkyCeiling Quick Start Guide





For T5 Rectilinear 15/16" or 24mm grid systems For soffits, see also Installation Instructions

Basic Components



Grid Hanger Strap





A. Kep nut





B. Flat head screw




Gloves






T5 Flourescent Bulb

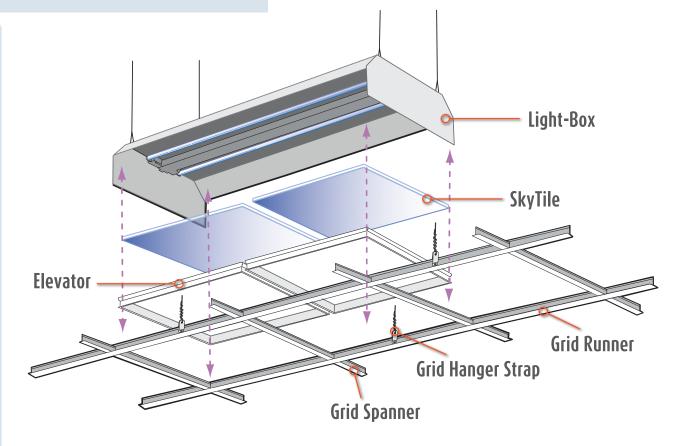









Installation Overview

- Install Grid Hanger Straps onto runners
- Assemble Light-Boxes
- Hang Light-Boxes
- Wire Light-Boxes & install bulbs
- Install Elevators
- Install SkyTiles
- Check installation using Final Inspection Checklist

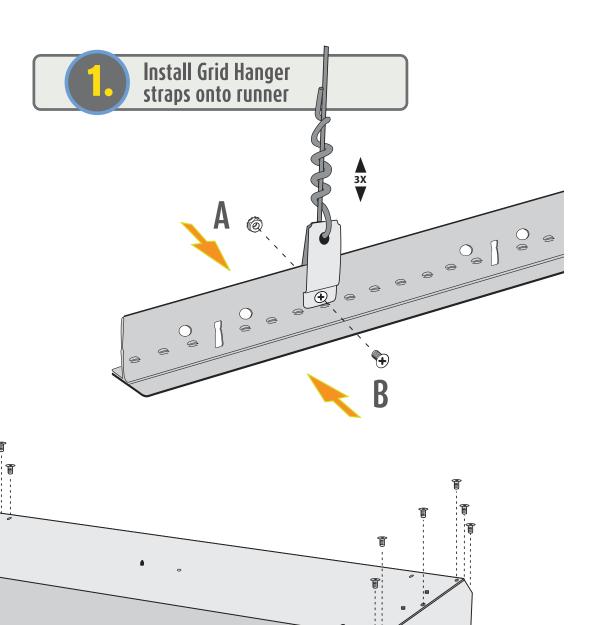


Assemble Light-Boxes

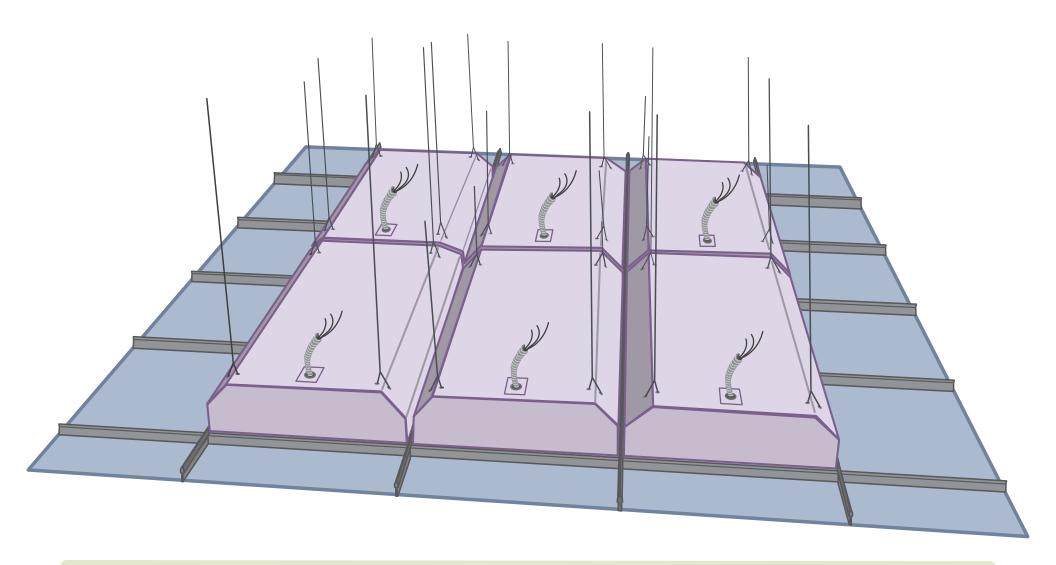








* Check that bulbs are lighting before proceeding




Note: Burn in dimmable bulbs a minimum of 12 hours at maximum intensity prior to dimming

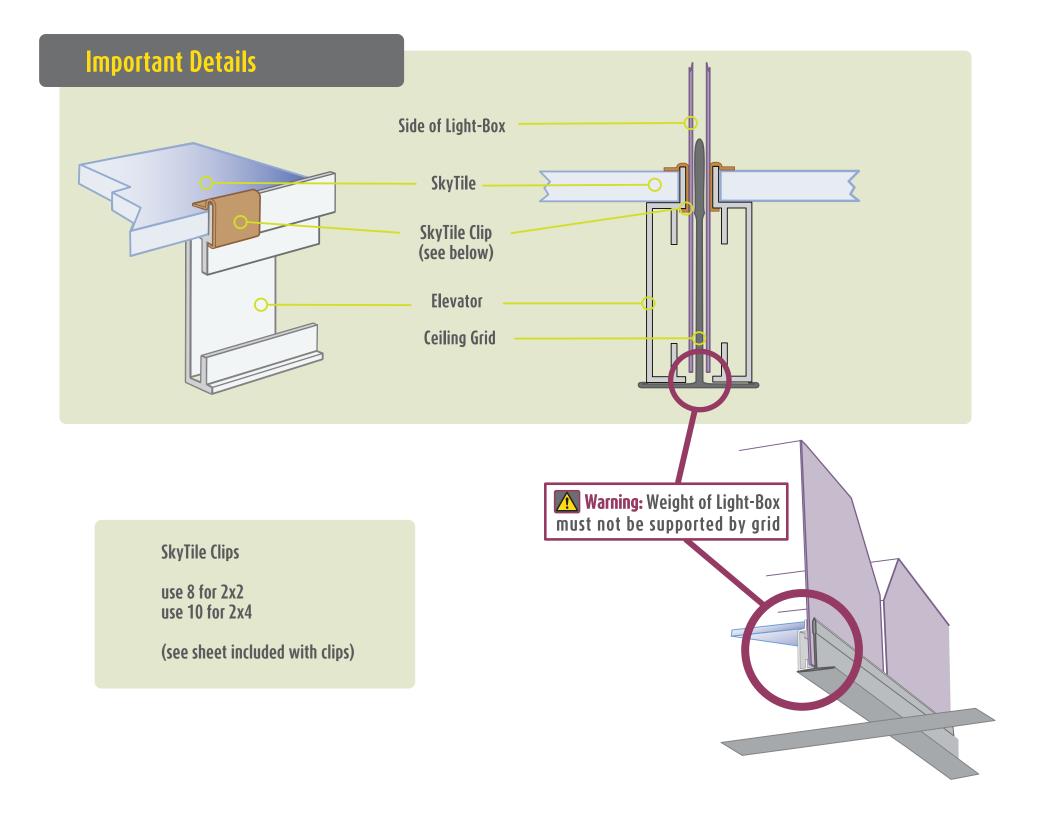

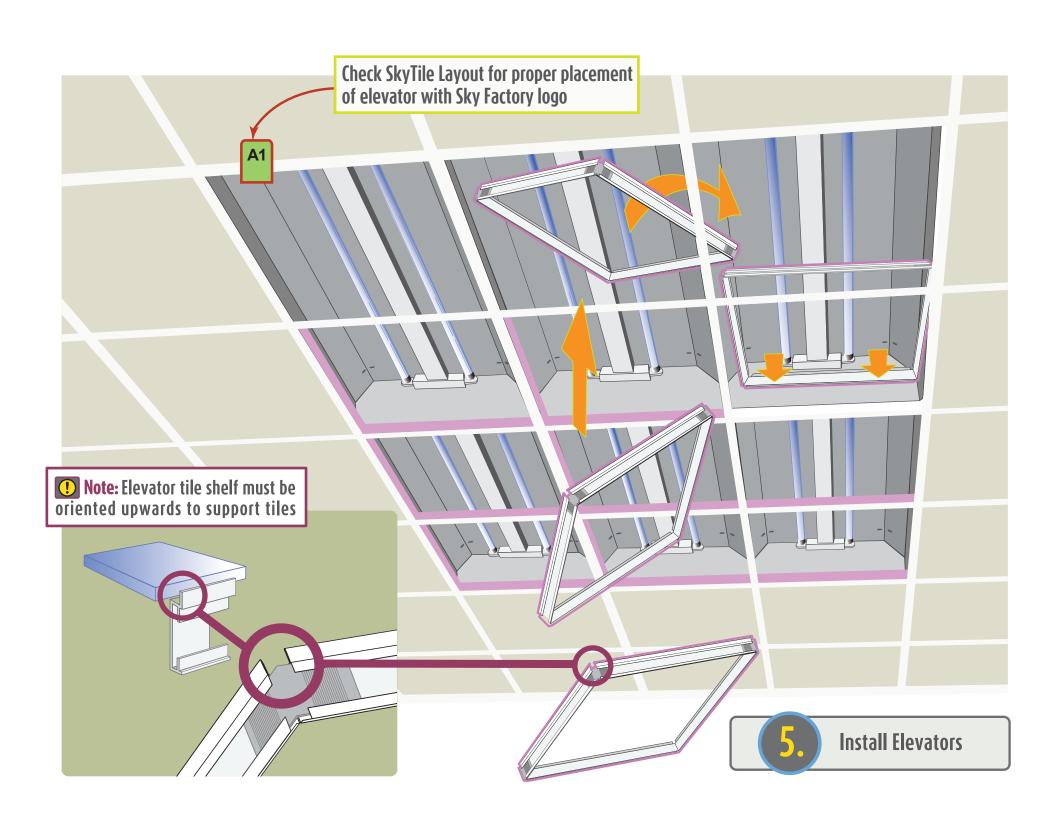

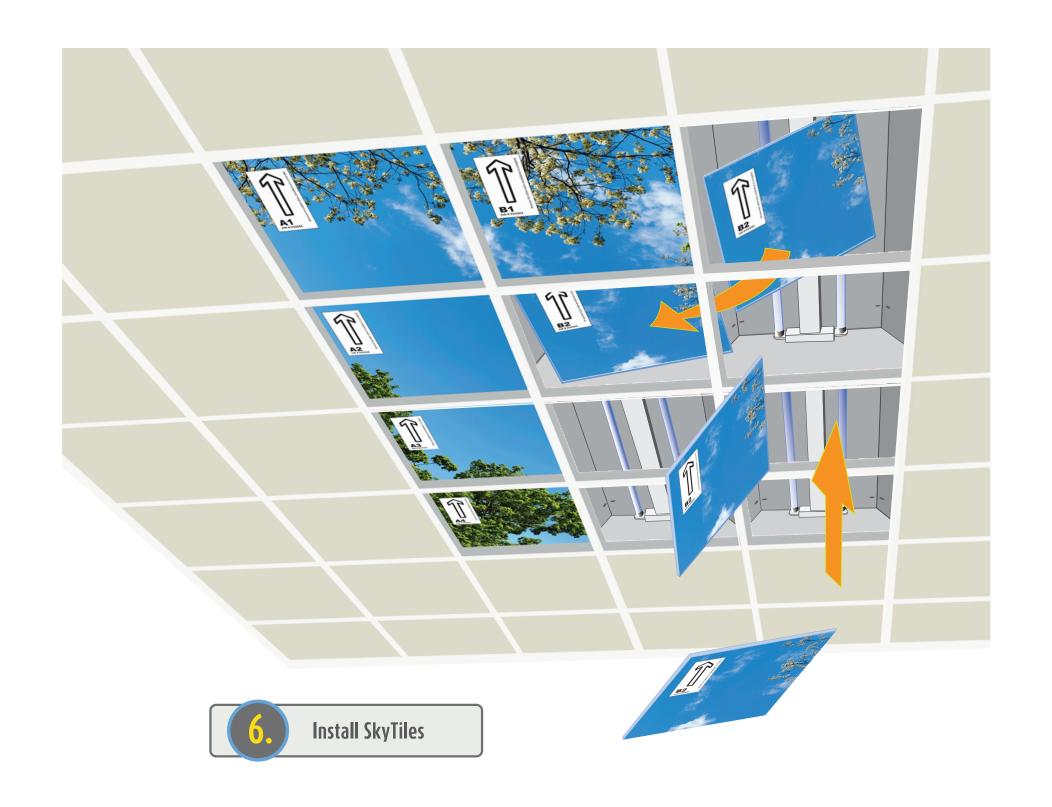

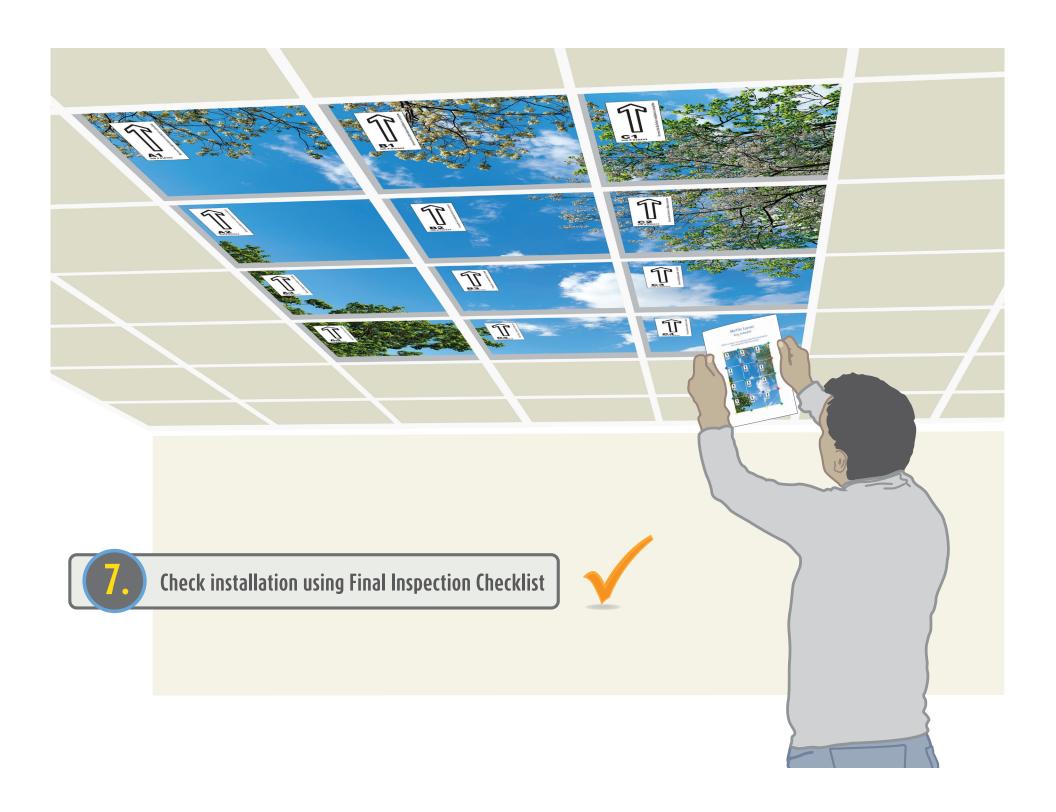





Final Inspection Checklist

- Elevators should lay flat on grid, be square and sides should not bow inward.
- Shadows, dark spots, or bright lines on image?
 - Clear off back of SkyTile.
 - Check for minimum of 8 in./20 cm between Light-Box and bottom of grid.
 - Make sure all bulbs are lighting.
- Any light leaks around edges of SkyTile?
 - Check that SkyTile is laying flat. Use SkyTile Clips if needed.
- Use SkyTile Layout for correct image installation.
 - Note: Your SkyTile Layout may have instruction for correct head and feet orientation of SkyCeiling.
- Is the elevator with logo in correct location?
 - See SkyTile Layout for correct location.
 - Note: Single 2x2 and 2x4 installations do not have logo.
- Remove arrow-labels after correct installation is verified.
- This guide is meant as a concise overview. For complete instructions, consult detailed installation instructions included with your Sky Factory Luminous SkyCeiling.
- Experiencing difficulty with your installation, or have additional questions?



