

Family Correlated Photometric Data

The following photometric information is developed using correlated data. Finelite considers a family to be a group of luminaires where critical performance metrics such as photometric performance, thermal performance, and electrical performance can be accurately projected via a combination of LM79 tests at the luminaire level and well-documented specifications at the component level.

For more information, please download [Finelite's Family Correlated White Paper](#)

Additional links:

- [Solid-State Lighting: Early Lessons Learned on the Way to Market](#)
(U.S. Department of Energy)
- [Lighting Facts®](#)
- [Design Lights Consortium®](#)

IES INDOOR REPORT
PHOTOMETRIC FILENAME : HP-2-I-4FT-V-8-TW-ITL85134.900.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST]ITL85134.900 Family Correlation File
[TESTLAB]INDEPENDENT TESTING LABORATORIES, INC.
[TESTDATE] 08/12/15
[ISSUE DATE]04/14/16
[MANUFAC]FINELITE, INC.
[LUMCAT]FINELITE HP-2-I-4ft-V-8-TW
[OTHER]ies file is based on 3500K; see luminaire tech sheet at www.finelite.com for lumen adjustment factors for other CCT's & CRI
[OTHER]INPUT ELECTRICAL: 120.0 VOLTS, 40.4 WATTS
[OTHER]INPUT ELECTRICAL: 277.0 VOLTS, 41.3 WATTS
[OTHER]see www.finelite.com for source file ITL85134. For further details on Finelite family correlation files, go to
[more]http://www.finelite.com/download_files/series_downloads/photometry_pdf/FL_Family_Correlation_WhitePaper.pdf
[_ABSOLUTE LUMENS]3749

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3749
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	93
Total Luminaire Watts	40.4
Ballast Factor	1.00
CIE Type	Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	4.00 ft
Luminous Width (90-270)	0.18 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : HP-2-I-4FT-V-8-TW-ITL85134.900.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
90.0	0	0	0	0	0
92.5	31	33	34	33	34
95.0	72	73	73	72	72
97.5	114	114	113	112	112
100.0	156	154	153	152	152
102.5	200	197	196	193	194
105.0	245	243	240	236	237
107.5	292	290	285	281	282
110.0	341	337	333	327	326
112.5	388	387	382	375	373
115.0	439	436	433	424	422
117.5	492	488	485	474	471
120.0	544	539	538	526	522
122.5	597	591	590	580	575
125.0	651	644	642	633	632
127.5	705	698	696	687	686
130.0	759	749	751	741	740
132.5	814	803	805	795	792
135.0	868	856	859	849	846
137.5	921	910	911	903	900
140.0	974	961	962	955	953
142.5	1025	1012	1012	1007	1003
145.0	1074	1061	1062	1056	1051
147.5	1122	1107	1110	1102	1098
150.0	1167	1152	1156	1149	1143
152.5	1209	1195	1199	1193	1187
155.0	1249	1235	1241	1235	1229
157.5	1286	1272	1279	1273	1268
160.0	1318	1307	1313	1308	1304
162.5	1348	1338	1344	1339	1336
165.0	1374	1366	1370	1367	1365
167.5	1396	1391	1393	1391	1390
170.0	1414	1412	1412	1411	1410
172.5	1429	1428	1427	1428	1427
175.0	1439	1439	1439	1439	1439
177.5	1446	1446	1446	1445	1446
180.0	1448	1448	1448	1448	1448

IES INDOOR REPORT
PHOTOMETRIC FILENAME : HP-2-I-4FT-V-8-TW-ITL85134.900.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	0.00	N.A.	0.00
0-30	0.00	N.A.	0.00
0-40	0.00	N.A.	0.00
0-60	0.00	N.A.	0.00
0-80	0.00	N.A.	0.00
0-90	0.00	N.A.	0.00
10-90	0.00	N.A.	0.00
20-40	0.00	N.A.	0.00
20-50	0.00	N.A.	0.00
40-70	0.00	N.A.	0.00
60-80	0.00	N.A.	0.00
70-80	0.00	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	334.71	N.A.	8.90
90-120	762.10	N.A.	20.30
90-130	1334.86	N.A.	35.60
90-150	2657.47	N.A.	70.90
90-180	3749.1	N.A.	100.00
110-180	3414.39	N.A.	91.10
0-180	3749.1	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.00
90-100	80.33
100-110	254.38
110-120	427.40
120-130	572.75
130-140	659.78
140-150	662.84
150-160	569.55
160-170	385.57
170-180	136.50


IES INDOOR REPORT
PHOTOMETRIC FILENAME : HP-2-I-4FT-V-8-TW-ITL85134.900.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	95	95	95	95	81	81	81	81	56	56	56	32	32	32	10	10	10	0
1	87	83	79	76	74	71	68	65	48	47	45	28	27	26	9	9	8	0
2	79	72	66	62	67	62	57	53	42	40	37	24	23	22	8	7	7	0
3	72	63	56	51	61	54	49	44	37	34	31	21	20	18	7	6	6	0
4	65	56	48	43	56	48	42	37	33	29	26	19	17	16	6	6	5	0
5	60	49	42	36	51	42	36	32	29	25	22	17	15	13	5	5	4	0
6	55	44	36	31	47	38	32	27	26	22	19	15	13	11	5	4	4	0
7	50	39	32	27	43	34	28	23	23	19	17	14	11	10	4	4	3	0
8	47	35	28	23	40	30	24	20	21	17	14	12	10	9	4	3	3	0
9	43	32	25	20	37	28	22	18	19	15	13	11	9	8	4	3	3	0
10	40	29	22	18	34	25	19	16	17	14	11	10	8	7	3	3	2	0

POLAR GRAPH

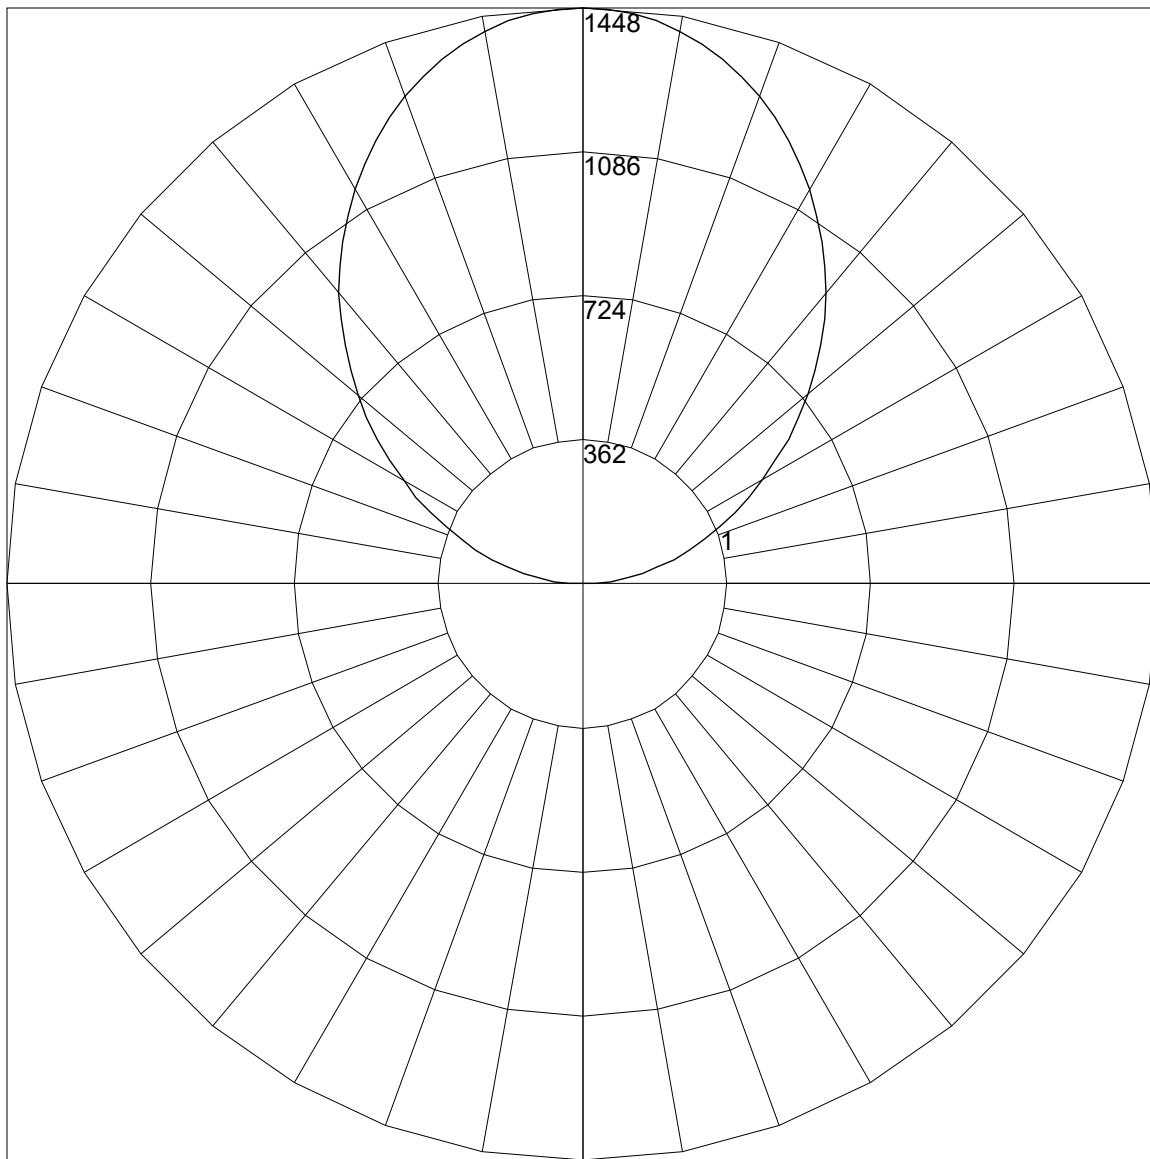

Maximum Candela = 1448 Located At Horizontal Angle = 0, Vertical Angle = 180
1 - Vertical Plane Through Horizontal Angles (90 - 270)