



# Clarus Glassboards Architectural Series

## Additional Information

### Recommended Hardware

Bottom Edge Mounting Options:

Product: CRL Aluminum 1/4" L-Bar


Vendor: CR Laurence

Catalog #: D317A Finish: SATIN ANODIZED

- 12' (3.66 m) Stock Lengths


- 50 Per Case

- Several Finishes



CRL Aluminum 1/4" L-Bar: is a multi-purpose extrusion. Use this extrusion as an edge protector on complete mirror door installations or on wall mirrors where a lower lip extrusion is not required.

### Elevation

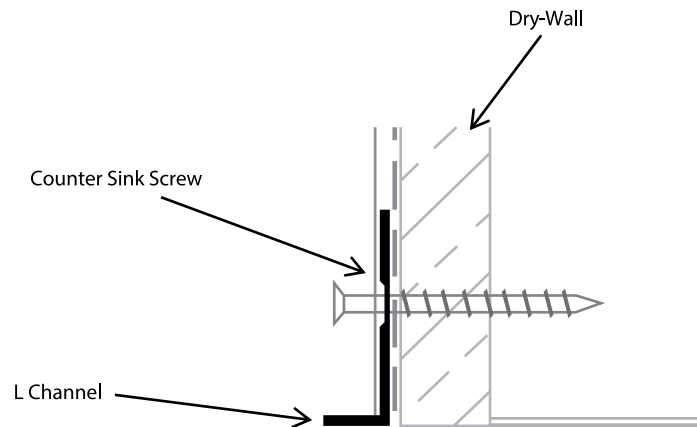

### Recommended Installation

1. Walls must be clean of wall paper, texture and dust particles. A primed wall is ok.
2. Fasten L Channel to studs on bottom of application
3. Apply 3M™ VHB™ Structural Glazing Tape on edges & select spots behind the glass.
4. Use M65 PermaWhite Polythane construction glue (or similar) applied to the back of the glass thoroughly. Glue must not be applied too close to the edge as to not come out from behind the glass as it cures.
5. Glue takes approximately 24hrs to cure. Braces recommended to stabilize product during curing process.