

Assembly Instructions

HurryUp!™ Nesting Table Table Wedge & Quarter Round

March 2004

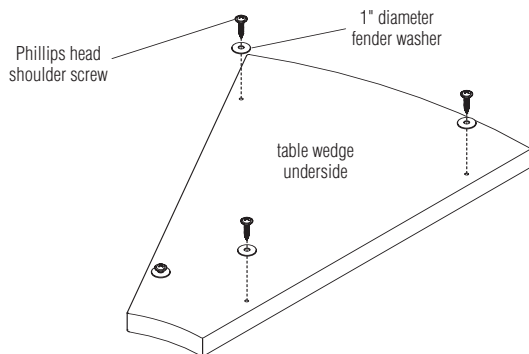


Figure 1

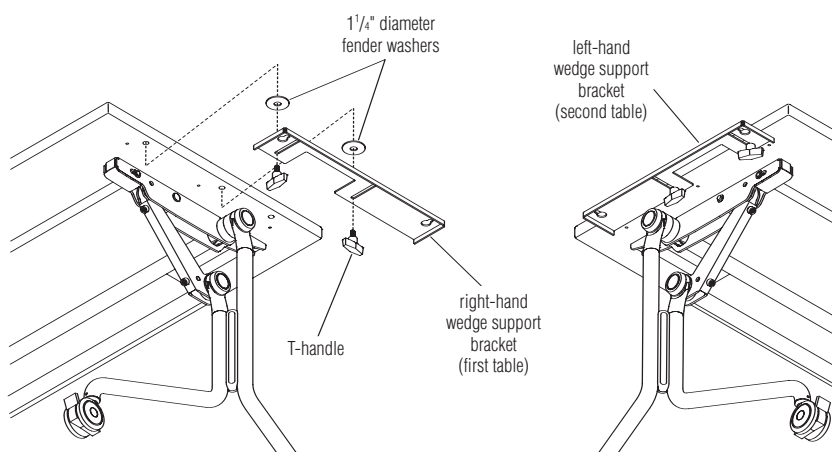


Figure 2

24" Wide Tables

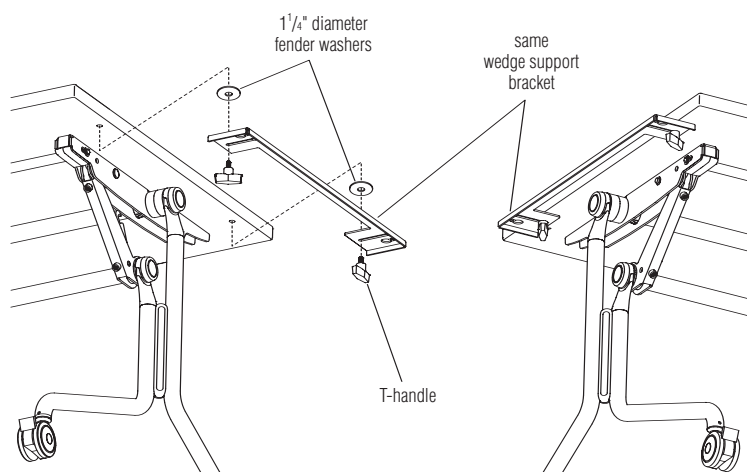


Figure 3

30" and 36" Wide Tables



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and injury.

Note: Two different fender washer sizes are used for this installation. Be sure to use the correct size washer for the appropriate step of the assembly process. The larger diameter 1 1/4" fender washers are to be used in step two, Figures 2 & 3.

1. Place a 1" fender washer onto four Phillips head shoulder screws and tighten to the underside of the wedge as illustrated (figure 1).

Note: Two different types of wedge support brackets are possible, depending on the width of the tables being joined. Tables which are 24" wide use a right- and left-hand bracket type (Figure 2). Tables which are 30"-36" wide use the non-handed "same" type of wedge support bracket (Figure 3).

2. Determine if tables and wedge to be joined are 24", or 30"-36" and locate appropriate wedge support brackets. For 24" wide tables use the right- and left-hand type of wedge support brackets and secure as illustrated using the 1 1/4" flat washers and T-handles (Figure 2). For 30"-36" tables, use the non-handed wedge support brackets and secure as illustrated using the 1 1/4" flat washers and T-handles (Figure 3).





Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and injury.

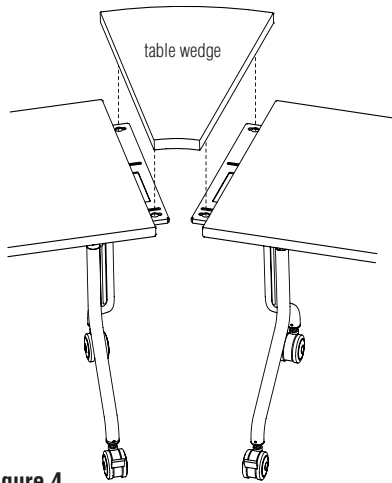


Figure 4

Detail A



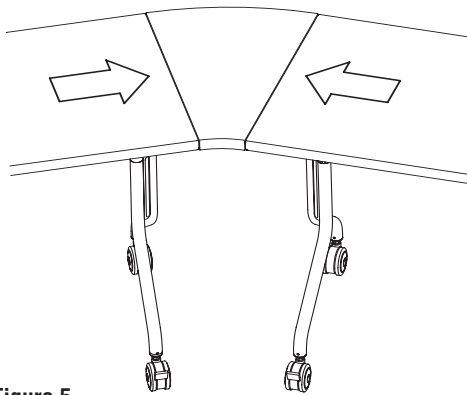


Figure 5

Detail B

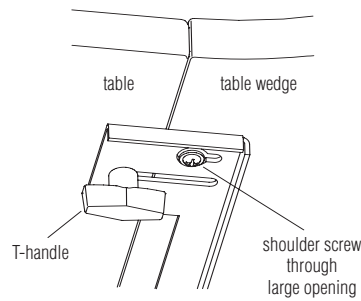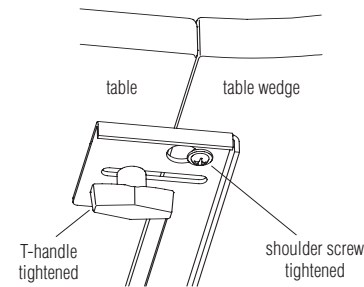

3. Position adjoining tables together as illustrated, with wedge support brackets attached, and carefully set table wedge onto brackets. Align the shoulder screws of the underside of the table wedge into the larger part of the teardrop shape opening in the brackets (Figure 4 & Detail A).
4. Push the tables together and slide the support brackets so the smaller opening captures the shoulder screws (Figure 5 & Detail B).
5. Making sure tables are tight to wedge, tighten T-handles by hand (Figure 5 & Detail B).
6. To store support brackets, loosen the T-handles and slide the bracket over until it is flush with the edge of the table. Tighten T-handles to secure in place (Figure 6).

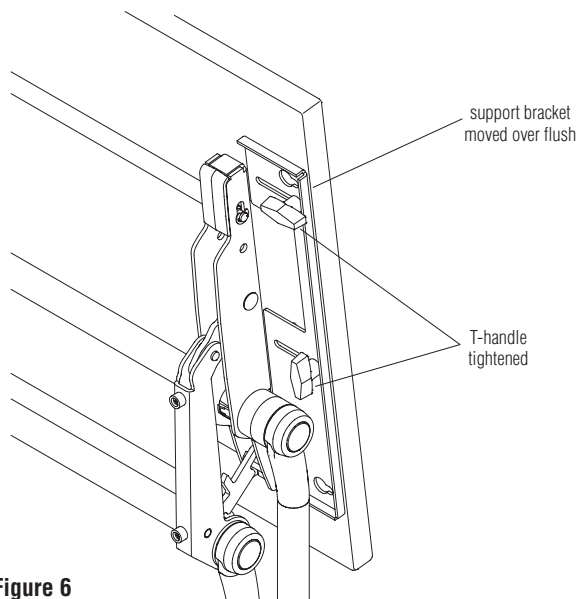


Figure 6