

# BAUX TRÄULLIT MOUNTING INSTRUCTIONS


## MOUNTING BAUX TRÄULLIT PANELS ON WALL CASSETTES

BAUX Träullit can be delivered with magnets attached. This provides the possibility of easy mounting, rearrangeable patterns and exchangeable Dekor panels. It also provides the possibility of additional sound absorption by adding a second absorber inside the cassettes. The cassettes are wall mounted. Start with the bottom row, each cassette is mounted to the wall in 4 mounting holes. The cassettes in the following rows are only mounted in the 2 upper mounting holes.

### Procedure

1. Mount the bottom row closest to the floor. Start with attaching the included brackets to the bottom of the panels. Keep a distance from the sides of approximately 200mm. Avoid placing the cassettes too close to the floor since they are then susceptible to chipping from kicks and cleaning appliances. Recommended distance from floor is 200mm.


2. Mount the cassettes to the wall using the attached bottom brackets and the two top holes.

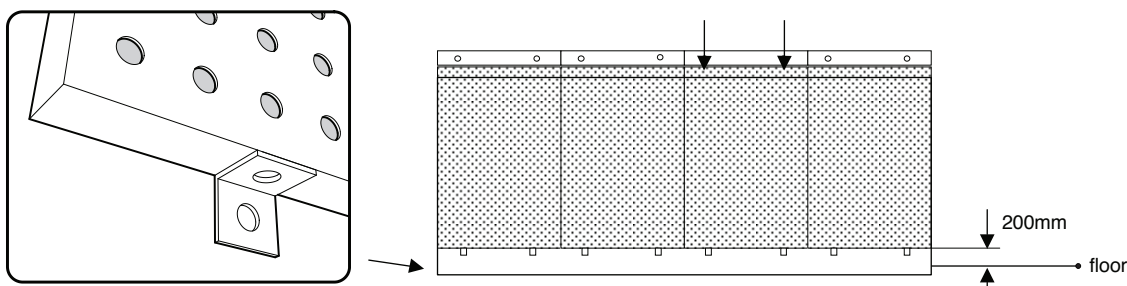

3. Finish the entire bottom row.


4. For each successive row, start by folding out the flaps at the bottom of the cassette, fold them to a maximum of 90°.

5. Place the cassettes on top of a mounted panel, the folded flaps should fit in the top holes of the previous cassette.

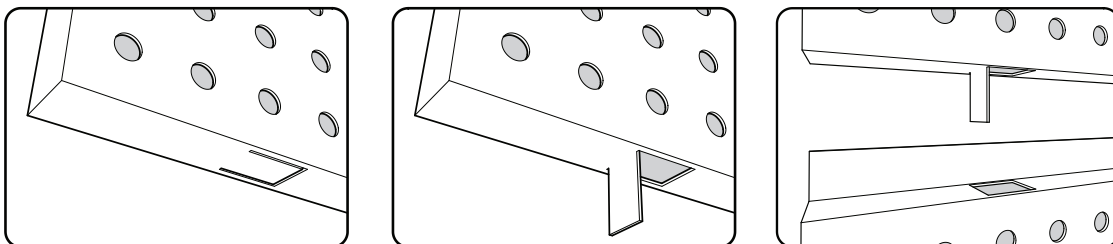

6. Attach the cassette to the wall using the two top holes.

7. Finish the rest of the row.

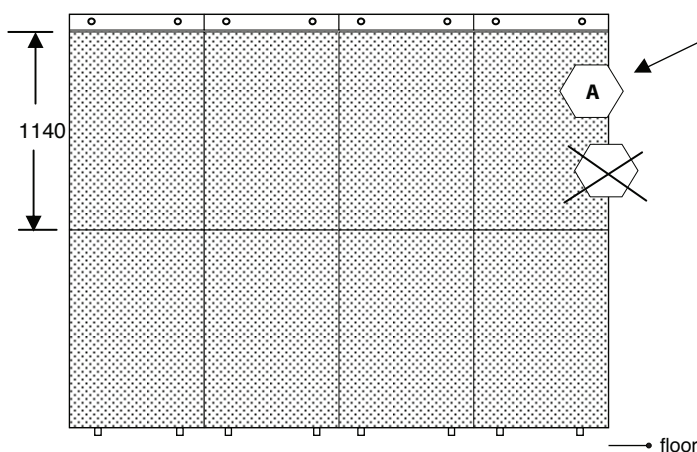

8. Place the BAUX TRÄULLIT panels according to the picture. They should not be placed further out than Detail A

*Note: Objects not in exact scale*

### Technical data

Measurements:	710mm x 1140mm x 20mm
Material:	1mm galvanized metal
Coating:	Powdercoat
Color:	White, NCS S0500N
Perforation:	Ø 5mm, CC 10mm
Absorbant:	Black absorbing felt

# BAUX