

SELECT



SELECT PLANKS / TILES Volume 2



36" x 36" Concrete Tile



NVL-2402 Pewter



NVL-2401 Gunmetal

4" x 36" Planks



WAA-5111 Honey Bamboo



WAA-6002 Honey Wheat



WAA-2001 Maple Leaf



WAA-5125 Golden Bamboo



WAA-5112 Timber Bamboo



WAA-4652 Sangria



WAA-5104 Alaskan Birch

6" x 36" Planks



WAH-2100 Aspen



NVH-2701 River Birch



WAH-6024 Stonehenge



WAH-6025 Rosewood



WAH-4741 Nightwood



WAH 6026 Blackbean




WAH 6032 Cocobola



NVH 2732 Old Oak



NVH 2731 Royal Maple

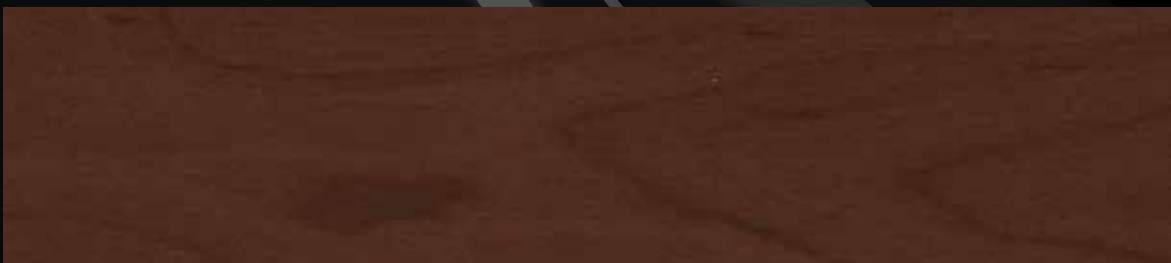

NVH 2733 Deep Cherry


7" x 48" Planks



NVF-2531 Red Oak Natural



WAF-2413 Canyon

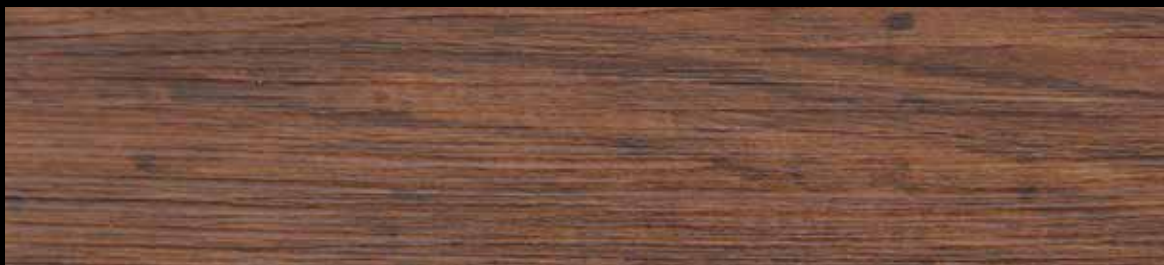

WAF-6022 Walnut



WAF-5135 Mahogany



NVF-2501 Wynnwood

7" x 48" Planks



WAF-2415 Wenge



NVF-4328 Cypress



WAF-5136 Foxtail



NVF-2532 Dusky Gray



NVF-2533 Dovetail


17 3/4" x 35 1/2" Slab




NVG-2602 Portabella



NVG-2601 Glacier

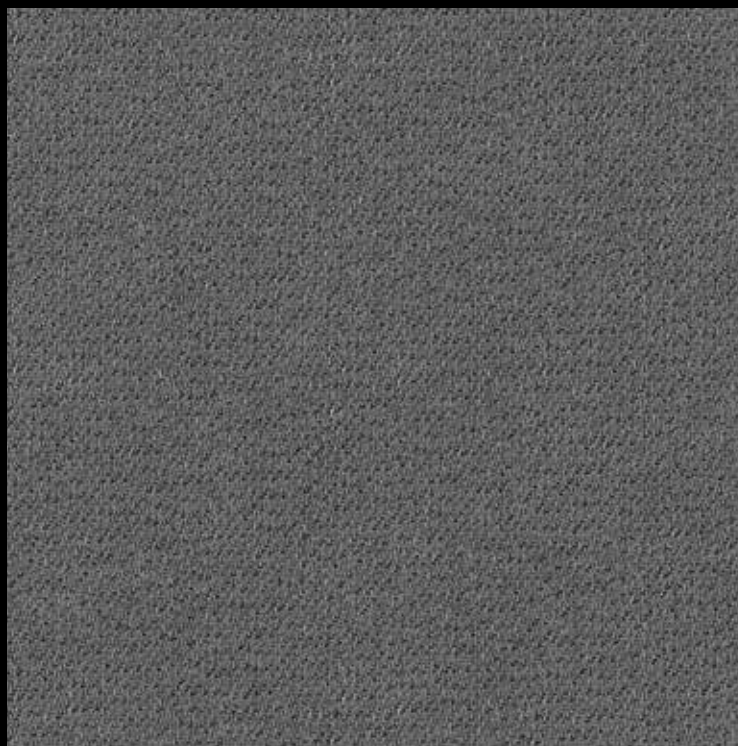

NVK-2103 Tweed

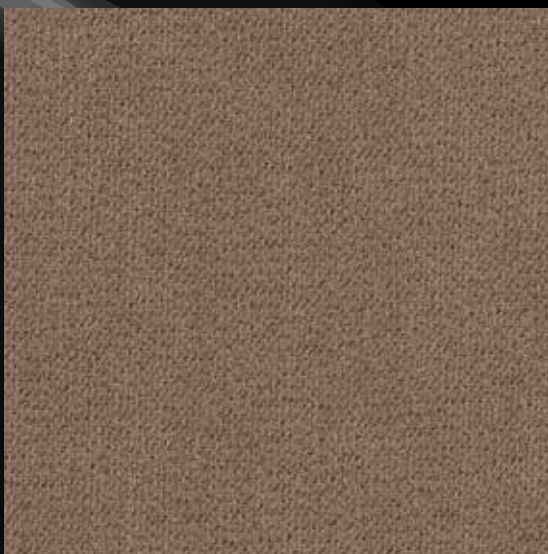

NVK-2102 Suede



NVK-2101 Camel


18" x 18" Tile



MAE-3033 Silicon



MAE-3034 Chromium

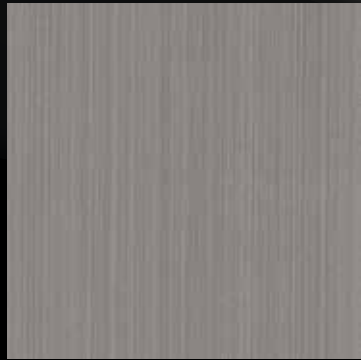

MAE-3035 Nickel



MAE-3036 Carbon



NVE-2231 Tonalite



NVE-2232 Norite




NVE-2233 Diorite




NVE-2301 Harvest



NVE-2302 Shaker Gray

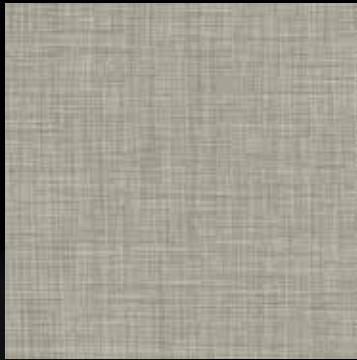

NVE-2201 Metallic Gray

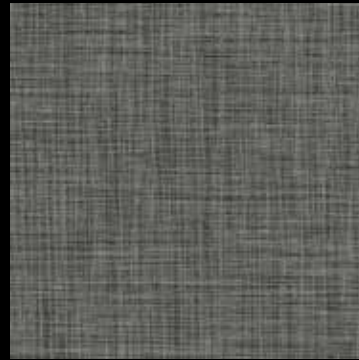

NVE-2202 Pepper



MAE-71891 Linen Leaf



MAE-7142 Burnt Sienna



MAE-7143 Bittersweet

Note: MAE-71891 Linen Leaf has a leaf pattern in the background. Please request full sized sample to review the leaf pattern.

Technical Specification Information

Classification: ASTM F1700 Class III, Type A (smooth)
Type B (embossed)

Overall Thickness: 3.0mm, .118", Nominal 1/8"

Wear Layer Thickness: .5mm, 20mil

Wear Layer: High Molecular Weight Polymerized Vinyl

Finish: Protech UV Cured Polyurethane

Edge Detail: Square Edge (no bevel)

Warranty: 10 Year Commercial Warranty

Static Load Limit: ASTM F970 1100psi
(residual compression maximum 0.005")

Chemical/Stain Resistance: ASTM F925 Excellent

Slip Resistance: ASTM C1028-89, >0.6

Flame Spread: ASTM E648, >.45, Class 1

Smoke Density: ASTM E662, <450

Low Emitting Flooring: LEED IEQ4.3

Low Emitting Adhesive: LEED IEQ4.1

Recycled Content: Post Consumer and Post
Industrial Recycled Content Present*

Indoor Air Quality: CHPS 1350 Certified

Indoor Air Quality: FloorScore Certified

Plant Certification: ISO14001, ISO9001

Trade Agreements Act (TAA) Compliant

*For detail on Health Product Declaration and recycled content please email request to info@tajflooring.com



740 Church Road • Elgin, IL 60123

(888) 652-2111 • fax (847) 690-9931 • tajflooring.com

