



the future is safer with altro

Altro Stronghold™ 30



*Minimize risk in wet and greasy areas
with aggressive safety flooring*

3mm
thick

6'7"
width

49'
length


sheet
format






Abyss

K3001 LRV: 7
WR100 / AM100




Tundra

K30500 LRV: 17
WR153 / AM239




Skyline

K30332 LRV: 24
WR52 / AM52




Russet

K30262 LRV: 14
WR41 / AM41



Dolphin

K3010 LRV: 21
WR86 / AM86



Biscuit

K30907 LRV: 30
WR146 / AM20



Midnight

K30421 LRV: 11
WR72 / AM72

Typical applications

Kitchens, bakeries, bars, commissaries, grocery, food and beverage manufacturing, serveries, food courts

Slip resistance			
Static coefficient of friction		ASTM D2047	.92 dry, .88 wet
Ramp test		DIN 51130	R12
TRRL pendulum test		BS 7976	55+

Specifications			
Thickness	3.0mm .12"		
Roll dimensions	6'7" x 49' 2.0 x 15m		
Weight	7.19 lbs./yd ² 3.9 kg/m ²		
Wear layer	3.0mm .12"		
Cleaning technology		Altro Easyclean Original	
Warranty		12 years	
Static load limit		ASTM F970	2000 psi
Sound insulation		ISO 140-8	10dB
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		This product is manufactured with bio-based content	
Recycled content		This product contains 10% post-consumer recycled content	
Composition	Silicon carbide, aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Altro Easyclean Original Technology incorporated for cleanability.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats . Please conduct stain test before installation.		

Altro, the future is safer with Altro, Altro Stronghold 30, and Altro Easyclean Original are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2016

LEED facts

LEED v4




This product may help contribute to the following credits:

Altro Stronghold 30 total qualifying credits **8**

	Materials and resources 10% post-consumer recycled content	1
	Materials and resources Rapidly renewable bio-based content	1
	Materials and resources Environmental product declaration (EPD)	1
	Materials and resources Health product declaration (HPD)	1
	Environmental quality Low emitting materials, flooring CA 01350	3
	Environmental quality Low emitting materials, adhesives	1

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability

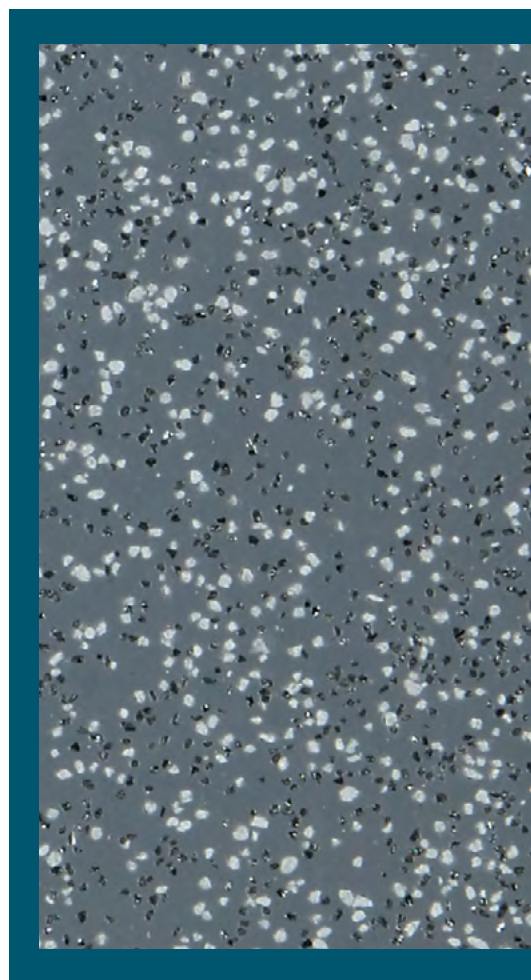

Color shown: Dolphin K3010

