



the future is safer with altro

Altro Classic™ 25



*Safety flooring ideal for commercial kitchens
and back of house areas*

2.5mm
thick

6'7"
width

66'
length

sheet
format






Anvil

X2594R11

LRV: 11

WR101 / AM72




Graphite

X2546R11

LRV: 21

WR86 / AM86




Truffle

X2545R11

LRV: 17

WR153 / AM239




Pewter Grey

X2539R11

LRV: 26

WR81 / AM81



Walnut

X2586R11

LRV: 10

WR62 / AM62




Blackberry

X2547R11

LRV: 7

WR100 / AM100




Mushroom

X2542R11

LRV: 32

WR24 / AM27

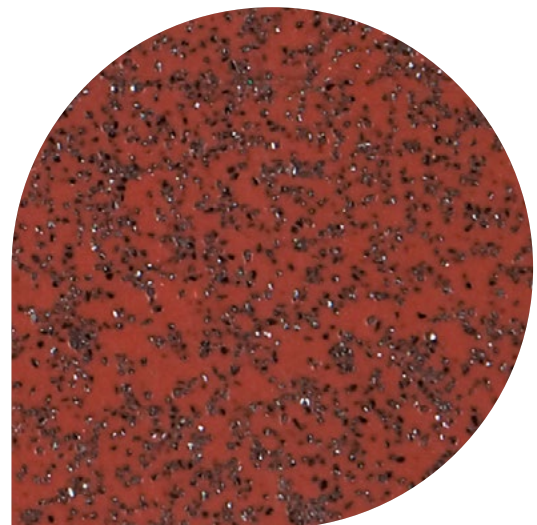

Quarry Red




X2560R11

LRV: 13

WR42 / AM42

Typical applications

Food preparation and service areas, walk in coolers

Slip resistance		
Static coefficient of friction ASTM D2047		.9 dry, 1.0 wet
Ramp test DIN 51130		R11
TRRL pendulum test BS 7976		45+

Specifications			
Thickness	2.5mm .10"		
Roll dimensions	6'7" x 66' 2.0m x 20m		
Weight	5.89 lbs./yd ² 3.2 kg/m ²		
Wear layer	2.5mm .10"		
Cleaning technology		Altro Easyclean Original	
Warranty		12 years	
Static load limit		ASTM F970	1000 psi
Sound insulation		ISO 140-8	5dB
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		These products are manufactured with bio-based content.	
Recycled content		These products contain 10% post-consumer recycled content	
Composition	Silicon carbide, aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Altro Easyclean Original Technology incorporated for cleanability.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats . Please conduct stain test before installation.		

Altro, the future is safer with Altro, Altro Classic 25, and Altro Easyclean Original are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2016







LEED facts

LEED v4



This product may help contribute to the following credits:

Altro Classic 25 ^{total qualifying credits} **8**

	Materials and resources 10% post-consumer recycled content	1
	Materials and resources Rapidly renewable bio-based content	1
	Materials and resources Environmental product declaration (EPD)	1
	Materials and resources Health product declaration (HPD)	1
	Environmental quality Low emitting materials, flooring CA 01350	3
	Environmental quality Low emitting materials, adhesives	1

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability

