



the future is safer with altro


Altro Reliance™ 25



*Robust, slip resistant flooring for **heavy duty areas***

Formerly named Altro Designer 25 and Altro Maxis Unity






Jet

D2501

LRV: 6

WR100 / AM100




Midnight

D25421

LRV: 11

WR72 / AM72




Storm

D25903

LRV: 16

WR82 / AM82




Fog

D25153

LRV: 27

WR81 / AM81




Skyline

D25332

LRV: 25

WR52 / AM52




Bone

D25215

LRV: 37

WR20 / AM20




Biscuit

D25904

LRV: 30

WR146 / AM20




Rust

D25907

LRV: 10

WR150 / AM238




Roof Garden

D2500

LRV: 23

WR262 / AM154




Vault

D2517

LRV: 5

WR277 / AM100




Ice Rink

D2514

LRV: 70

WR291 / AM01




Statue

D2513

LRV: 62

WR304 / AM12




Monument

D2508

LRV: 23

WR305 / AM239



Rock

D2504


LRV: 23

WR84 / AM84




Arena

D2510 **LRV: 41**
WR297 / AM20




Forge

D2515 **LRV: 9**
WR248 / AM238




Signal

D2516 **LRV: 13**
WR300 / AM42




Plaza

D2512 **LRV: 32**
WR27 / AM27




Pavement

D2507 **LRV: 14**
WR83 / AM83




Gallery

D2511 **LRV: 10**
WR62 / AM62




Temple

D2509 **LRV: 27**
WR261 / AM81




Runway

D2506 **LRV: 9**
WR72 / AM72

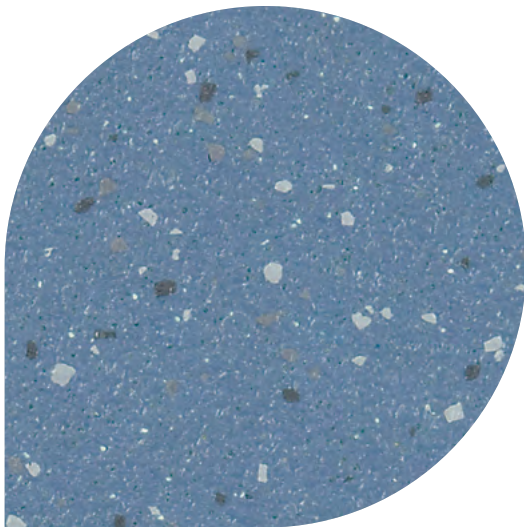


Fountain

D2502 **LRV: 22**
WR306 / AM71




Streetlight

D2505 **LRV: 45**
WR287 / AM79



Stream

D2518 **LRV: 22**
WR288 / AM71



Pool

D2503 **LRV: 10**
WR307 / AM73

Typical applications

Slip resistant flooring in both traditional and modern looks for a multitude of heavy duty applications

Slip resistance

Static coefficient of friction		ASTM D2047	greater than .8 dry, .9 wet
Ramp test		DIN 51130	R10
TRRL pendulum test		BS 7976	40+

Specifications

Thickness	2.5mm .10"		
Roll dimensions	6'7" x 66' 2.0m x 20m		
Weight	6.27 lbs./yd ² 3.4 kg/m ²		
Wear layer	2.5mm, homogeneous construction		
Cleaning technology		Altro Easyclean Maxis PUR	
Warranty		15 years	
Static load limit		ASTM F970	2000 psi
Sound insulation		ISO 140-8	7dB
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM 662	Tested Class I < 450
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		This product is manufactured with bio-based content.	
Recycled content		This product contains 10% post-consumer recycled content	
Composition	Traditional - Silicon carbide, aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Modern - Aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Altro Easyclean Maxis PUR incorporated for exceptional cleanability.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro, the future is safer with Altro, Altro Reliance and Altro Easyclean Maxis PUR are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2016


LEED facts

LEED v4




This product may help contribute to the following credits:

Altro Reliance 25 total qualifying credits **8**

	Materials and resources 10% post-consumer recycled content	1
	Materials and resources Rapidly renewable bio-based content	1
	Materials and resources Environmental product declaration (EPD)	1
	Materials and resources Health product declaration (HPD)	1
	Environmental quality Low emitting materials, flooring CA 01350	3
	Environmental quality Low emitting materials, adhesives	1

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability

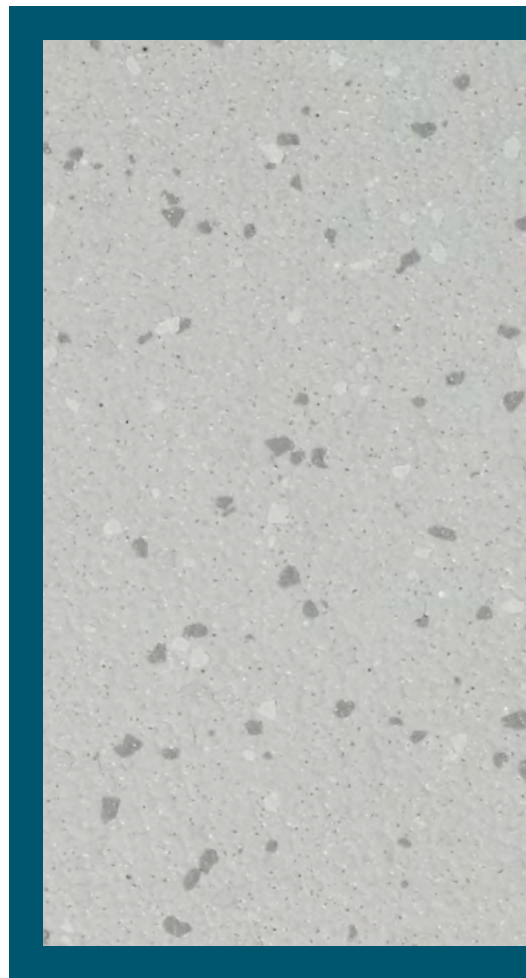

Color shown: Streetlight D2505

