



altro

the future is safer with altro

# Altro XpressLay™




*Adhesive free slip-resistant flooring*

2.2mm  
thick

6'7"  
width


66'  
length

sheet  
format

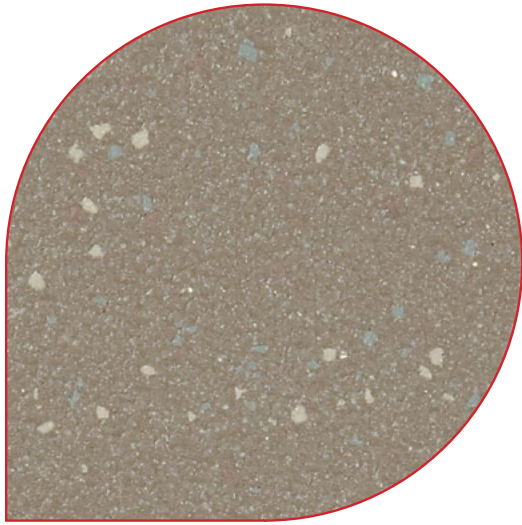


**Quick Ship - Monument**

XL12208P **LRV: 23**  
WR305 / AM239




**Quick Ship - Swan**

XL12212P **LRV: 75**  
WR291 / AM01




**Quick Ship - Biscuit**

XL22907 **LRV: 30**  
WR146 / AM20




**Quick Ship - Tundra**

XL22910 **LRV: 17**  
WR153 / AM239




**Quick Ship - Fog**

XL122153 **LRV: 27**  
WR81 / AM81




**Quick Ship - Rock**

XL12204P **LRV: 23**  
WR84 / AM84




**Pavement**

XL12207P **LRV: 14**  
WR83 / AM83




**Coal**

XL12258 **LRV: 6**  
WR100 / AM100




**Blue**

XL22412 **LRV: 22**  
WR71 / AM71




**River**

XL12257 **LRV: 22**  
WR71 / AM71

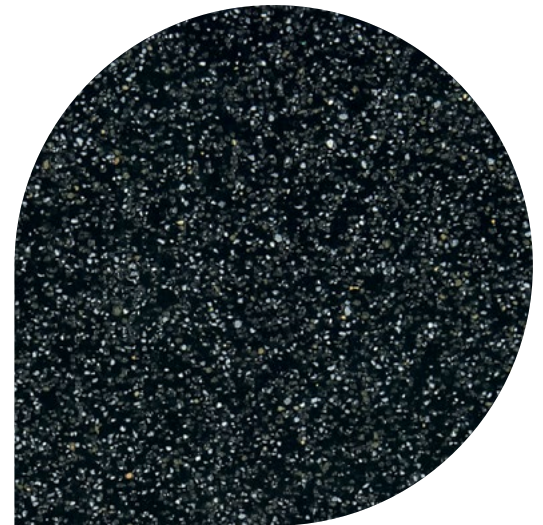


**Black**

XL22892 **LRV: 6**  
WR100 / AM100




**Midnight**

XL22421 **LRV: 11**  
WR72 / AM72



**Lupin**

XL12259 **LRV: 17**  
WR286 / AM286




**Winter**

XL12253 **LRV: 61**  
WR105 / AM01




**Pitch**

XL2220P **LRV: 5**  
WR277 / AM100




**Roof Garden**

XL2200P **LRV: 23**  
WR262 / AM154




**Runway**

XL2206P **LRV: 9**  
WR72 / AM72



**Mallard**


XL12213P **LRV: 13**  
WR302 / AM302



**Gecko**

XL12202P **LRV: 18**  
WR308 / AM308



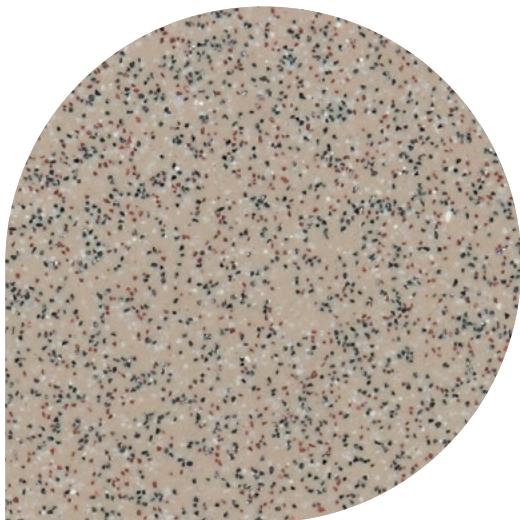


**Bone**

XL22215

LRV: 37

WR20 / AM20




**Sand**

XL22251

LRV: 40

WR20 / AM20




**Savannah**

XL22250

LRV: 19

WR153 / AM239




**Whale**

XL22254

LRV: 20

WR86 / AM86




**Tango**

XL22231

LRV: 14

WR42 / AM42




**Forge**

XL2215P

LRV: 9

WR248 / AM238




**Silk**

XL2203P

LRV: 10

WR310 / AM35




**Temple**

XL2209P

LRV: 27

WR261 / AM81




**Streetlight**

XL2205P

LRV: 45

WR287 / AM79




**Dolphin**

XL2210

LRV: 21

WR86 / AM86




**Cloud**

XL2214

LRV: 41

WR79 / AM191




**Blizzard**

XL2255

LRV: 44

WR79 / AM191




**Fresco**

XL2217P

LRV: 31

WR309 / AM309




**Stream**

XL2201P

LRV: 22

WR288 / AM71




**Nightfall**

XL2256

LRV: 10

WR72 / AM72




**Skyline**

XL22332

LRV: 24

WR52 / AM52




**Tarragon**

XL2252

LRV: 26

WR52 / AM52




**Arena**

XL2219P

LRV: 41

WR297 / AM20



**Minster**

XL2218P

LRV: 40

WR289 / AM265




**Gallery**

XL2211P

LRV: 10

WR62 / AM62



**Signal**

XL2216P

LRV: 13

WR300 / AM42

## Typical applications

### General purpose

#### Slip resistance

Static coefficient of friction		ASTM D2047	.78 dry, .80 wet
Ramp test		DIN 51130	R10
TRRL pendulum test		BS 7976	36+

#### Specifications

Thickness	2.2mm   .087"		
Roll dimensions	6'7" x 66'   2.0m x 20m		
Weight	4.79 lbs./yd <sup>2</sup>   2.6 kg/m <sup>2</sup>		
Wear layer	.8mm		
Cleaning technology		Altro Easyclean Maxis PUR	
Warranty		10 years	
Static load limit		ASTM F970	2000 psi
Sound insulation		ISO 140-8	7dB
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		This product is manufactured with bio-based content.	
Recycled content		VM20 contains 10% pre-consumer & 10% post-consumer recycled content.	
Composition	Aluminum trioxide and colored quartz aggregate throughout thickness. Silicon carbide also present on traditional "sparkly" hues. Altro Easyclean Maxis PUR incorporated for exceptional cleanability.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim. Altro XpressLay has embossed PVC backing.		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at <a href="https://altrofloors.com/downloads">altrofloors.com/downloads</a> , training clinic information at <a href="https://altrofloors.com/training">altrofloors.com/training</a> . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at <a href="https://altrofloors.com/downloads">altrofloors.com/downloads</a> . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro, the future is safer with Altro, Altro XpressLay and Altro Easyclean Maxis PUR are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.  
© Copyright Altro USA 2016

## LEED facts

LEED v4




This product may help contribute to the following credits:

Altro XpressLay *total qualifying credits* **8**

	Materials and resources Contains recycled content	<b>1</b>
	Materials and resources Rapidly renewable bio-based content	<b>1</b>
	Materials and resources Environmental product declaration (EPD)	<b>1</b>
	Materials and resources Health product declaration (HPD)	<b>1</b>
	Environmental quality Low emitting materials, flooring CA 01350	<b>3</b>
	Environmental quality Low emitting materials, adhesives	<b>1</b>

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit [altrofloors.com/sustainability](http://altrofloors.com/sustainability)

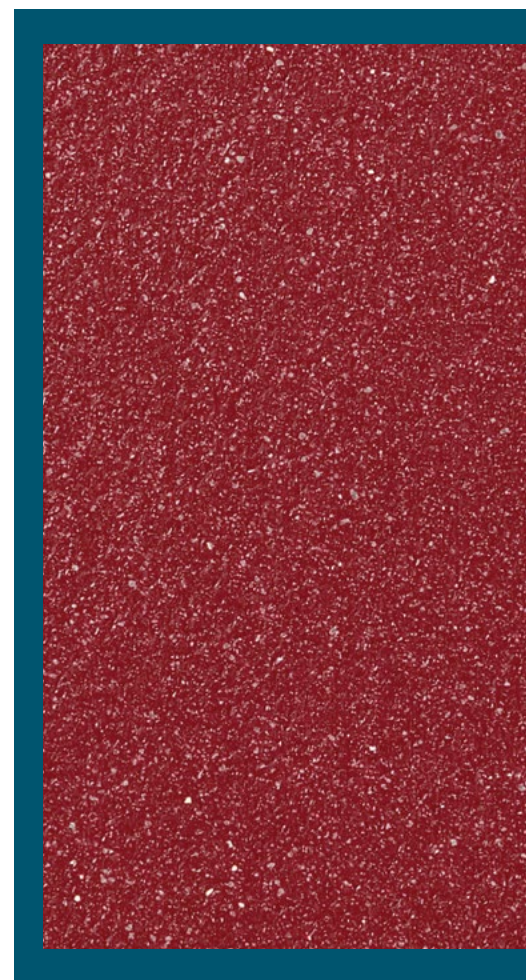

Color shown: Forge XL2215P

