




altro

the future is safer with altro

Altro Tungsten™

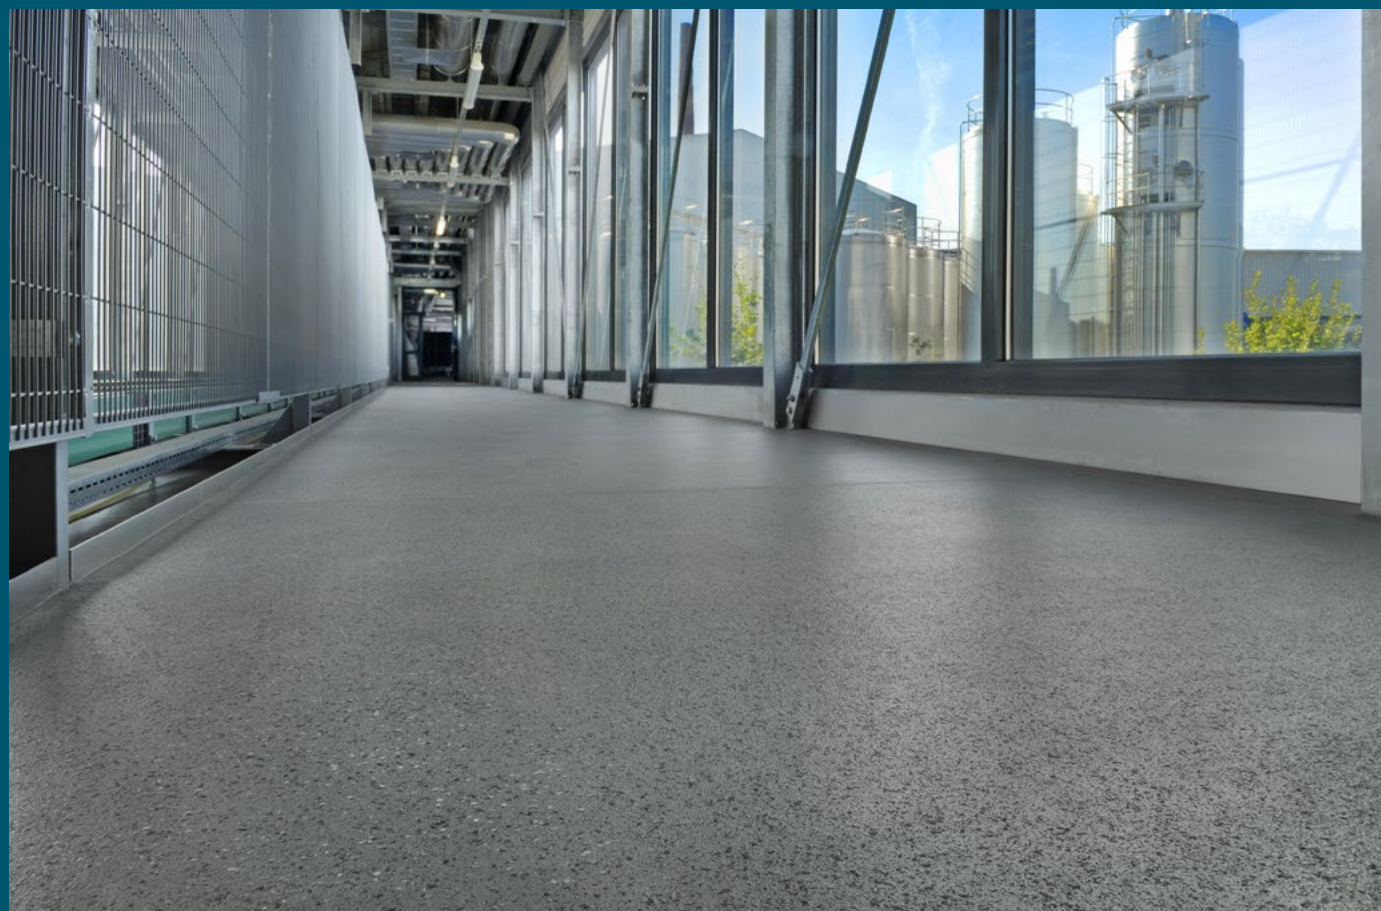

Slip resistant PVC free, fleece backed safety flooring


2mm
thick

6'7"
width

66'
length

sheet
format




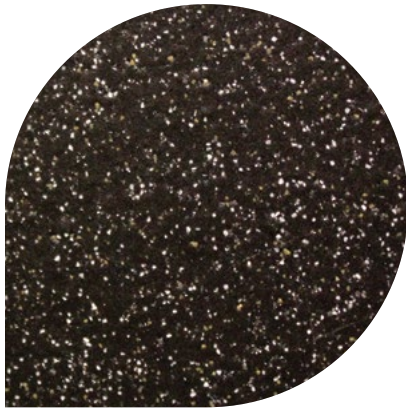

Black

TUN203006 **LRV: 6**


WR100 / AM100

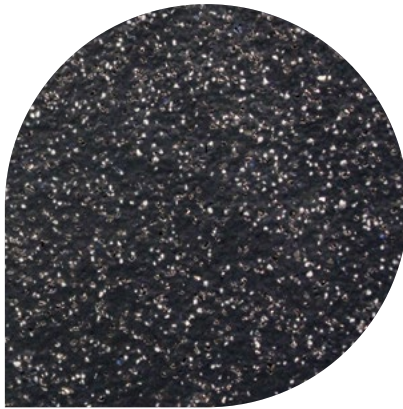

Midnight

TUN203005 **LRV: 11**


WR72 / AM72

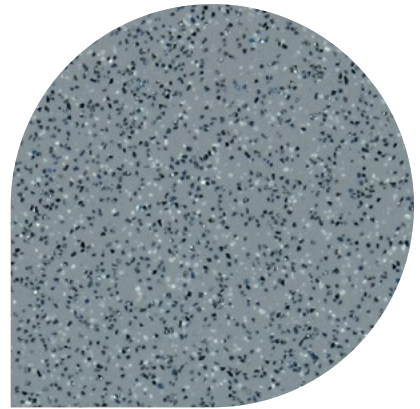

Fog

TUN203001 **LRV: 27**


WR81 / AM81

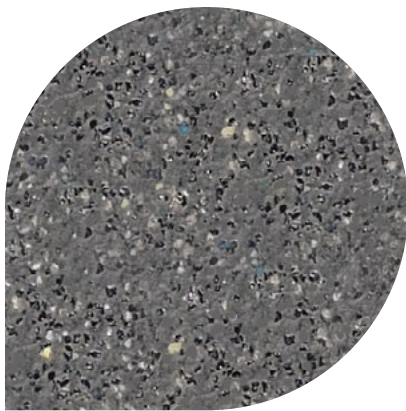

Storm

TUN203009 **LRV: 16**


WR82 / AM82

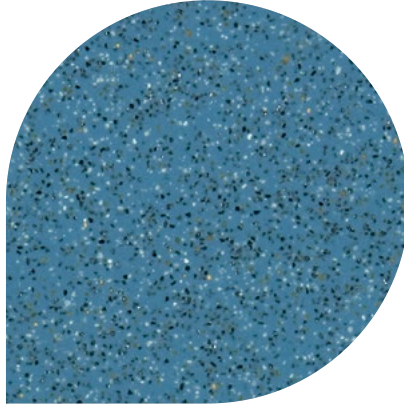

Azure

TUN203007 **LRV: 20**

WR249 / AM249

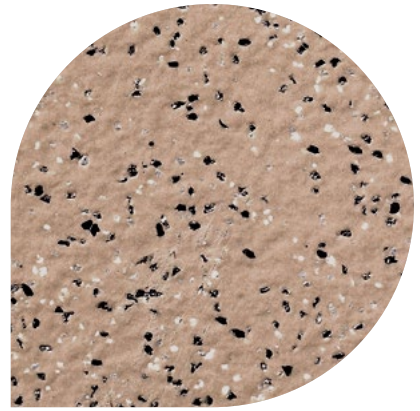

Bison

TUN203008 **LRV: 30**


WR63 / AM239

Typical applications

Kitchens, bakeries, bars, commissaries, grocery, food and beverage manufacturing, serveries, food courts

Slip resistance			
Static coefficient of friction		ASTM D2047	1.0 dry
Ramp test		DIN 51130	R10
TRRL pendulum test		BS 7976	36+

Specifications			
Thickness	2mm .08"		
Roll dimensions	6'7" x 66' 2.0 x 20m		
Weight	4.97 lbs./yd ² 2.25 kg/m ²		
Wear layer	2.0mm .08"		
Cleaning technology		Altro Easyclean Original	
Warranty		10 years	
Sound insulation		ISO 140-8	10dB
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
VOC emissions		CA 01350 FloorScore	Pass Certified
Recycled content		This product contains 10% post-consumer recycled content	
Composition	Silicon carbide, aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Altro Easyclean Original Technology incorporated for cleanability.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats . Please conduct stain test before installation.		
Altro, the future is safer with Altro, Altro Tungsten, and Altro Easyclean Original are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.			
© Copyright Altro USA 2016			

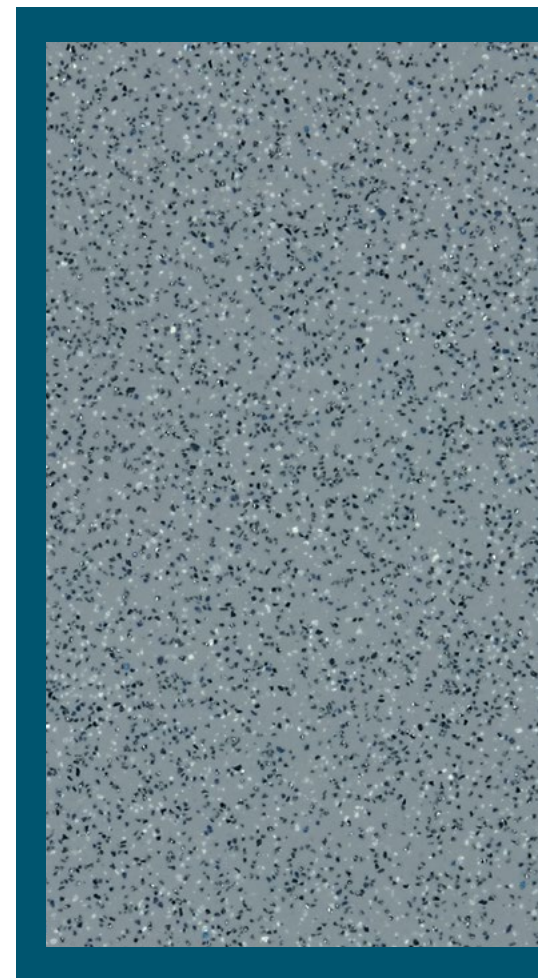

Color shown: Fog TUN203001

