


Altro Symphonia[™]







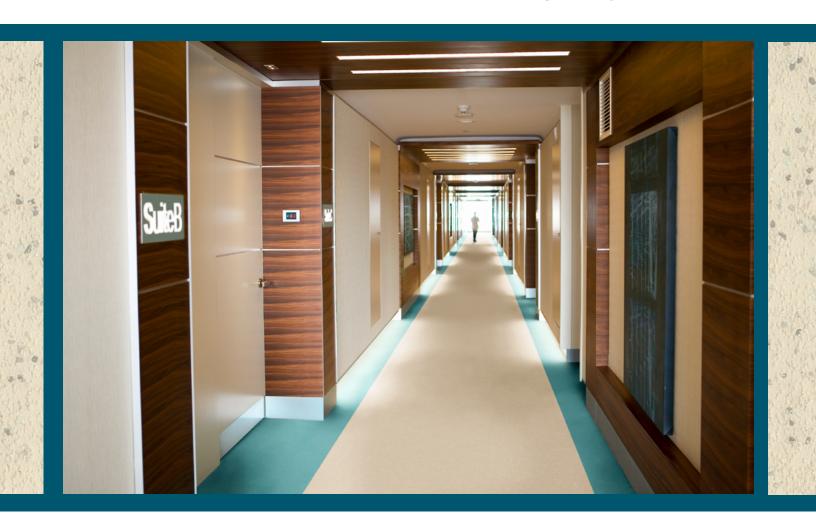




 Iceberg


 PH2003
 LRV 61

 WR284 / AM01













 Flurry
 Swo

 PH2012
 LRV 30
 PH202


 WR402 / AM81
 WR41







Manatee
PH2016 LRV 16
WR403 / AM82



Chipmunk PH2020 **LRV 13** WR232 / AM82



Koala PH2019 **LRV 12** WR404 / AM82



Raisin PH2040 LRV 8 WR275 / AM44





 Bubble Gum

 PH2036
 LRV 17

 WR276 / AM276











Caribou PH2009 **LRV 25** WR282 / AM239









Sable
PH2030 LRV 6
WR408 / AM100





 Pine Cone

 PH2014
 LRV 14


 WR371 / AM371





Clementine
PH2024 LRV 20
WR273 / AM273






 Geyser

 PH2021
 LRV 32


 WR285 / AM203





Whirlpool
PH2029 LRV 10
WR407 / AM73





Lakeside
PH2025 LRV 19
WR194 / AM71




Gulf PH2034 LRV 22 WR270 / AM56





Primrose
PH2039 LRV 42
WR411 / AM378







 Porpoise

 PH2033
 LRV 24

 WR409 / AM84



Cantaloupe
PH2023 LRV 31
WR405 / AM271





 Caterpillar

 PH2031
 LRV 19

 WR377 / AM308

Typical applications

Healthcare, education, senior living, dormitories, retail, offices, restaurants, general usage areas.

Slip resistance			
Static coefficient of friction	>.6 D >.7 W	ASTM D2047	greater than .6 dry, greater than .7 wet
Ramp test	R_{10}	DIN 51130	R10

Specifications				
Thickness	2.0mm .08"			
Roll dimensions	6'7" x 66' 2.0m x 20m			
Weight	4.60 lbs./yd ² 2.5 kg/m ²			
Wear layer	.8mm .031"			
Cleaning technology	Altro Easyclean PUR			
Warranty	10 year product warranty	10 years		
Static load limit		ASTM F970	2000 psi	
Sound insulation	(((©	ISO 140-8	5dB	
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM 662	Tested Class I < 450	
VOC emissions	VOC	CA 01350 FloorScore	Pass Certified	
Bio-based content	bio-based content	This product is manufactured with bio-based content.		
Recycled content		This product contains 5% post-consumer recycled content		
Composition	Aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Colored PVC and clear PVC used to create a dimensional appearance. Altro Easyclean PUR incorporated for exceptional cleanability.			
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim			
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads, training clinic information at altrofloors. com/training. Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads. Failure to install, heat weld, and/or maintain correctly could void the warranty.			
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.			



For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability



Color shown: Crystal PH2007









Altro, the future is safer with Altro, Altro Symphonia and Altro Easyclean PUR are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2016