




the future is safer with altro

Altro Quartz Tile™

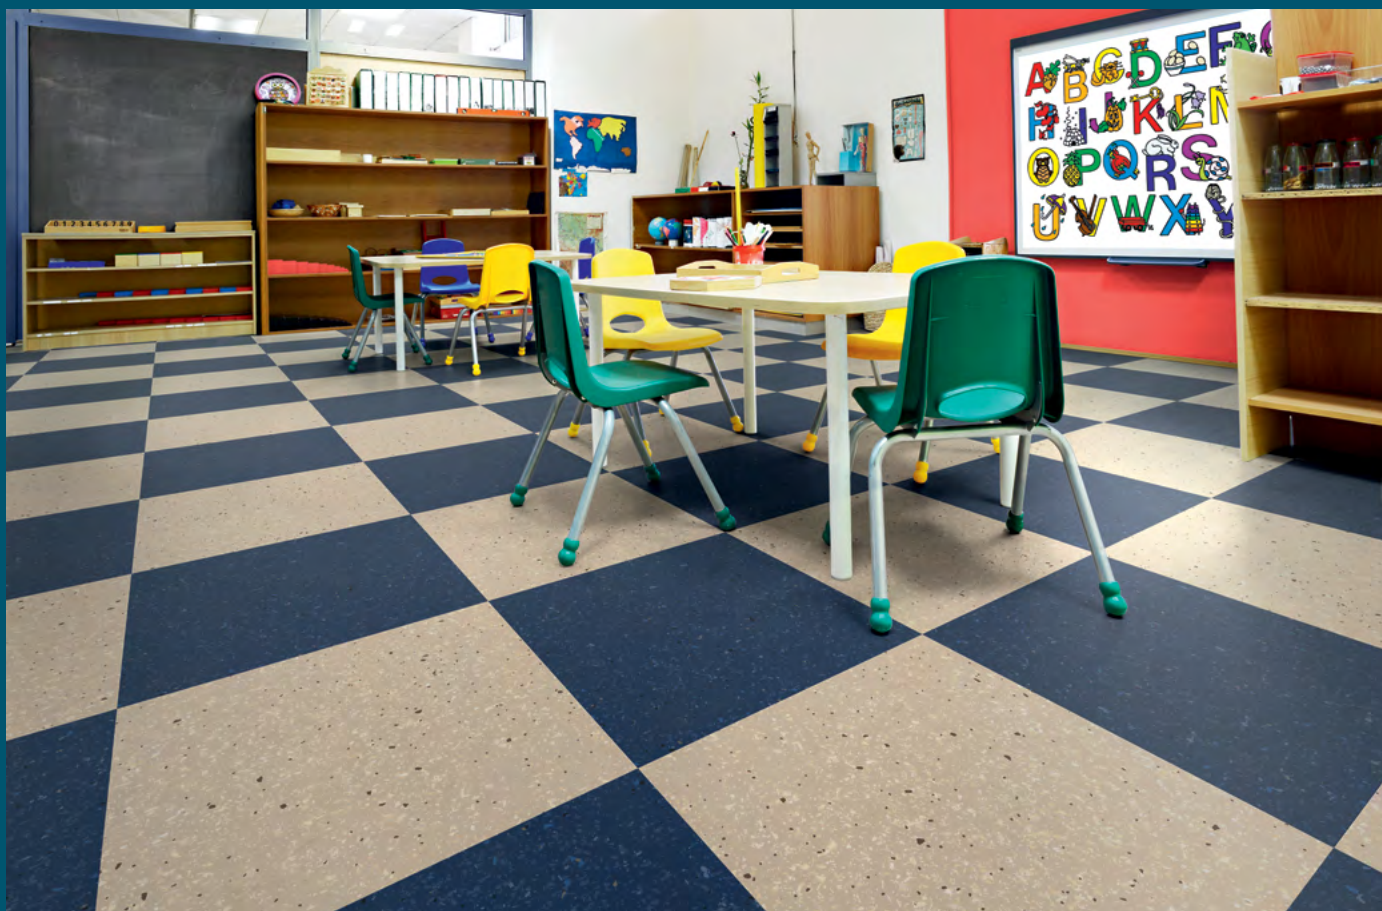


Compressed quartz tile for high traffic areas





Thunder CD

9318



Celery CD

9361




Sand CD

9322



Sand

9722



Ash

9703




Ash CD

9303




Ocean CD

9359




Rock Salt

9702




Lapis

9775




Chalk

9701



Chalk CD

9301




Citrine

9773




Steel CD

9304




Slate

9753



Slate CD

9353




Ice CD

9351



Shale

9724



Shale CD

9324



Rock Salt CD

9302



Platinum CD

9317




Cream

9721




Cream CD

9321




Latte

9723



Latte CD

9323




Espresso CD

9328



Charcoal CD

9306




Onyx

9719




Onyx CD

9319




Garnet

9770



Firecracker CD

9349




Coral

9774



Amethyst

9771



Emerald

9772




Moss CD

9722




Fern CD

9367



Lemongrass CD

9363




Terracotta CD

9344



Sunglow CD

9329




Curry CD

9325

Typical applications

Schools, hallways, classrooms, cafeterias, lobbies, retail, supermarkets, cafes, general circulation areas

Slip resistance

Static coefficient of friction		ASTM C1028-96	greater than .6
--------------------------------	---	---------------	-----------------

Specifications

Thickness	2.0mm .08"		
Tile dimensions	24" x 24" 61cm x 61cm		
Tiles per carton	15		
Area per carton	60ft ² 5.57m ²		
Weight	48 lbs/carton 21.8 kg/carton		
Wear layer	2.0mm, homogeneous quartz/vinyl construction		
Cleaning technology		Factory-finished PUR coating	
Warranty		15 years	
Static load limit		ASTM F970	3000 psi
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM 662	Tested Class I < 450
VOC emissions		CA 01350	Pass
Content	Contains 70% quartz and 15% vinyl		
Composition	Compressed quartz and vinyl. Decorative vinyl chips and striations added to enhance appearance.		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation. Color should be chosen with expected traffic conditions in mind.		

Altro, the future is safer with Altro and Altro Quartz Tile are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2016


LEED facts

LEED v4




This product may help contribute to the following credits:


Altro Quartz Tile total qualifying credits **5**

 Materials and resources
Rapidly renewable bio-based content **1**

 Environmental quality
Low emitting materials, flooring CA 01350 **3**

 Environmental quality
Low emitting materials, adhesives **1**

For our full sustainability story as well as LEED, low-VOC, EPD, and HPD certificates visit altrofloors.com/sustainability

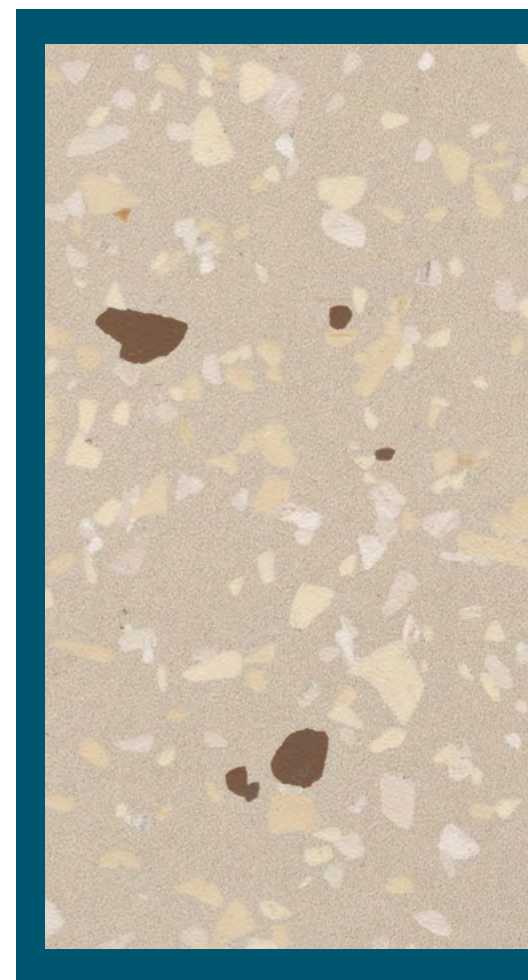

Color shown: Sand CD 9322

