




the future is safer with altro

Altro Dolce™ Tile

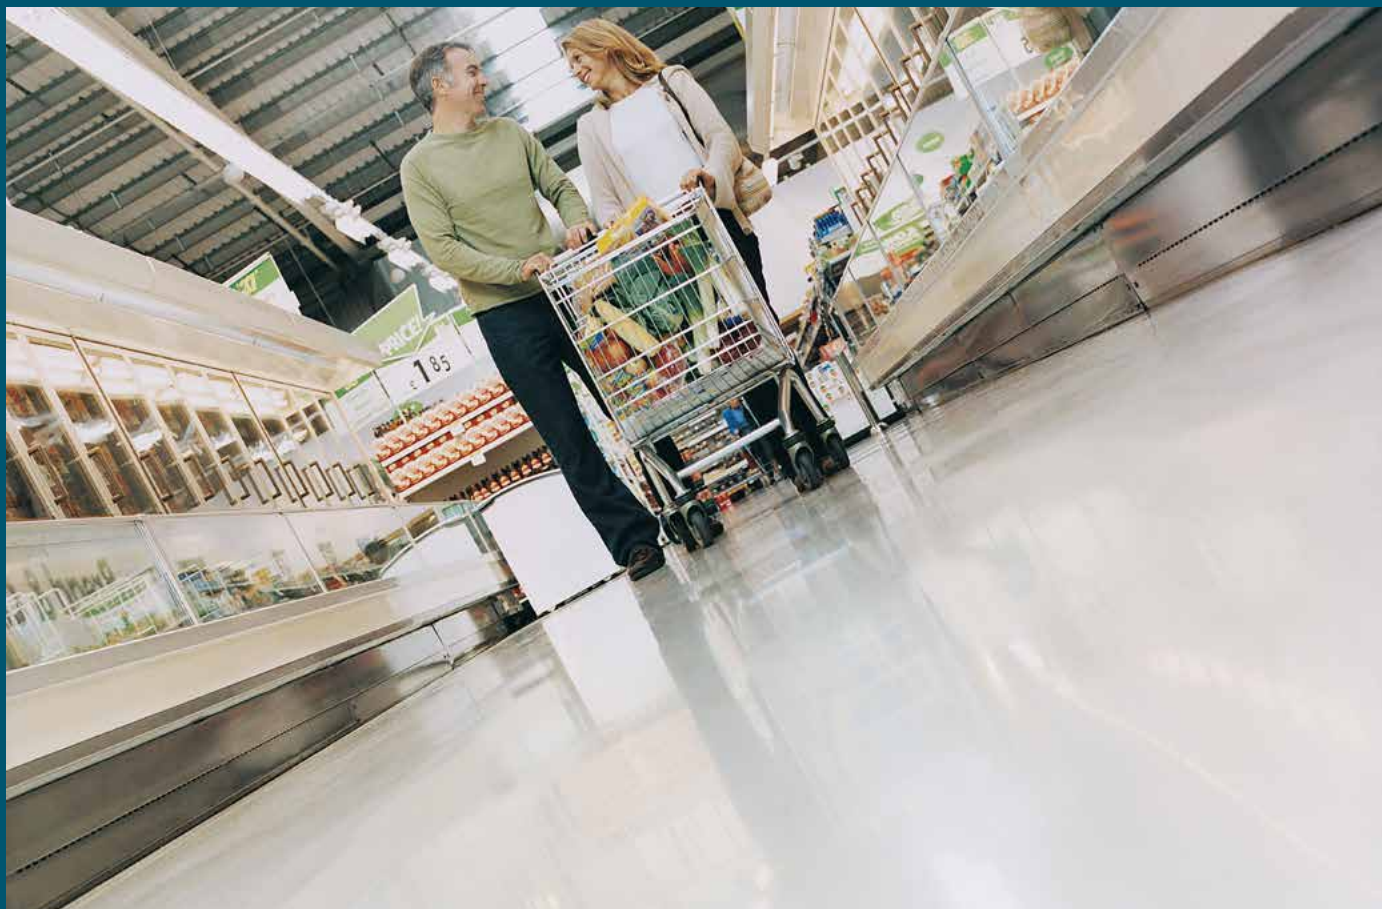

Sustainably sourced tile with *enhanced vinyl content*

3mm
thick

18"
width

18"
length

tile
format



AD501



AD527



AD509



AD506



AD503



AD505



AD525



AD507



AD529



AD502



AD512



AD601



AD508



AD519




AD526



AD514




AD515

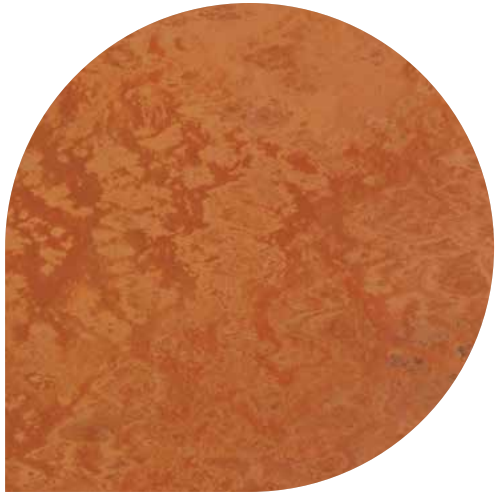

AD606



AD520



AD511




AD504



AD611



AD608

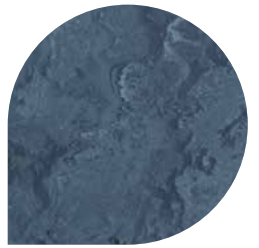

AD524



AD523




AD609




AD532



AD605



AD522

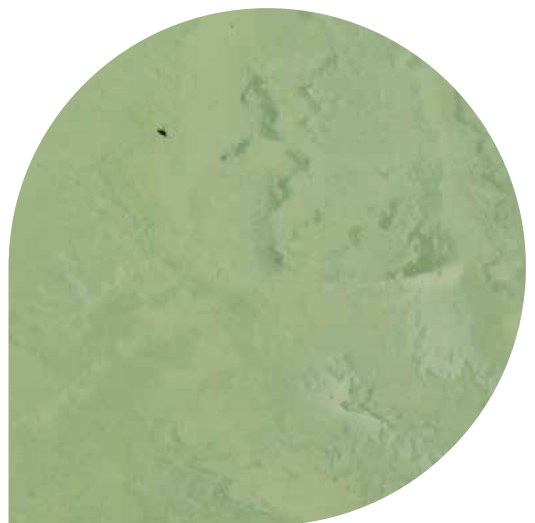


AD521

Typical applications

Schools, hallways, classrooms, cafeterias, lobbies, waiting rooms, retail, supermarkets, cafés, office buildings, general circulation areas

Slip resistance

Static coefficient of friction		ASTM C1028-96	greater than .6
--------------------------------	---	---------------	-----------------

Specifications

Thickness	3.0mm .12"		
Tile dimensions	18" x 18" 45.7cm x 45.7cm		
Tiles per carton	15		
Area per carton	33.75ft ² 3.13m ²		
Weight	44.35 lbs/carton 20.12 kg/carton		
Wear layer	3.0mm, homogeneous construction		
Cleaning technology		Factory-finished PU coating	
Warranty		10 years	
Static load limit		ASTM F970	2500 psi
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM 662	Tested Class I < 450
VOC emissions		CA 01350	Pass
Vinyl content	Vinyl content varies by color but is always greater than 10%		
Composition	Homogeneous vinyl with through pattern construction		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation. Color should be chosen with expected traffic conditions in mind.		

Altro, the future is safer with Altro and Altro Dolce are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2016

LEED facts

LEED v4



This product may help contribute to the following credits:

Altro Dolce total qualifying credits **5**



Materials and resources
72% pre-consumer recycled content

1



Environmental quality
Low emitting materials, flooring CA 01350

3



Environmental quality
Low emitting materials, adhesives

1

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability



Color shown: AD501

