

Altro Whiterock[™] Chameleon














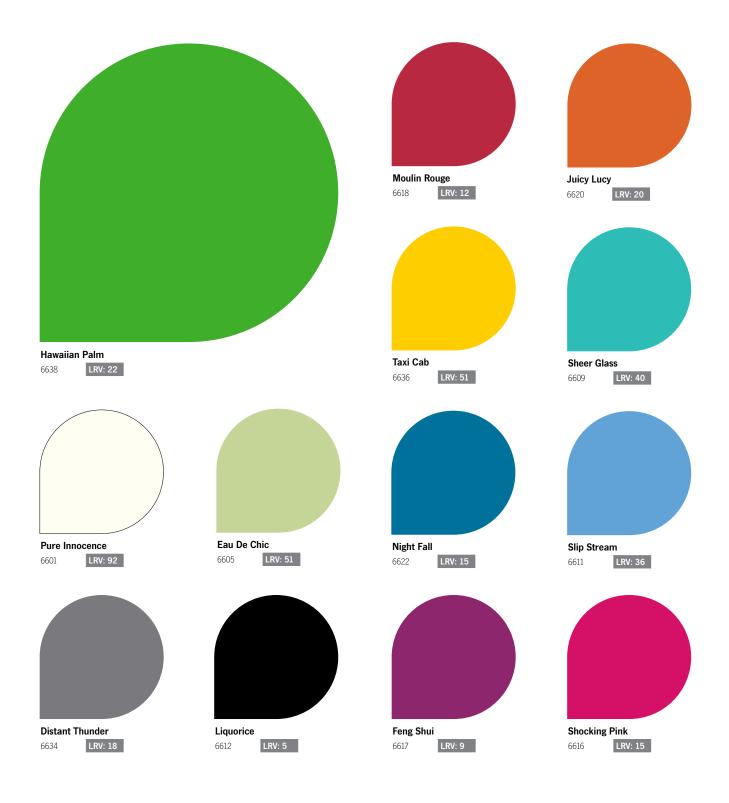


Typical applications

Designer accents, retail, front of house

Specifications			
Thickness	2.5mm .10"		
Dimensions	8' panel - 4' x 8' 2" 1.22m x 2.5m 10' panel - 4' x 9' 10" 1.22m x 3.0m		
Weight	8' panel - 23.59 lbs 10.7 kg 10' panel - 28.22 lbs 12.8 kg		
Warranty	year product worrarity	20 years	
Impact resistance	F	ASTM D5420	Exceeds 160 inch pounds
Fire and smoke performance		CAN/ULC - S102.2 ASTM E84-08	Tested Class A
VOC emissions	VOC	CA 01350	Pass
USDA	Altro Whiterock is USDA compliant		
	Altro Whiterock is FDA compliant		
U.S. Promorageia Production of County or	Altro Whiterock conforms to the hygienic standards of USP 797		
Composition	Extruded semi-rigid PVCu sheet		
Installation	Altro wall cladding must be installed by a professional installer that has attended the Altro Whiterock Installation Clinic. Installation procedures must follow the instructions detailed in the Altro Whiterock Installation Guide. Failure to install using the complete Altro Whiterock System could void the limited product warranty.		
Maintenance	Requires little maintenance. Regular cleaning using a soft cloth and a suitably diluted mild detergent is all that is normally needed. Stubborn marks can be removed with a non-abrasive domestic type cream bath cleaner Do not use abrasive pads, wire or wool. Do not clean above 140°F (60°C). If in doubt about cleaning procedures contact Altro.		
Altro, the future is safer with Altro, Altro Whiterock Chameleon, are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2016			



For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability

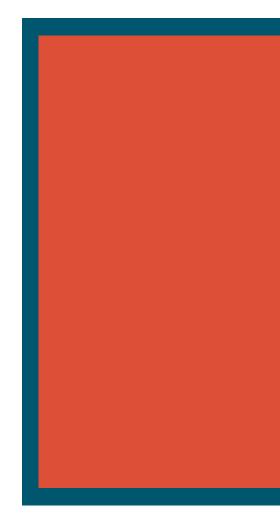

Color shown: Juicy Lucy 6620







www.altro.com



