




the future is safer with altro

Altro Dolce[™] Essentials

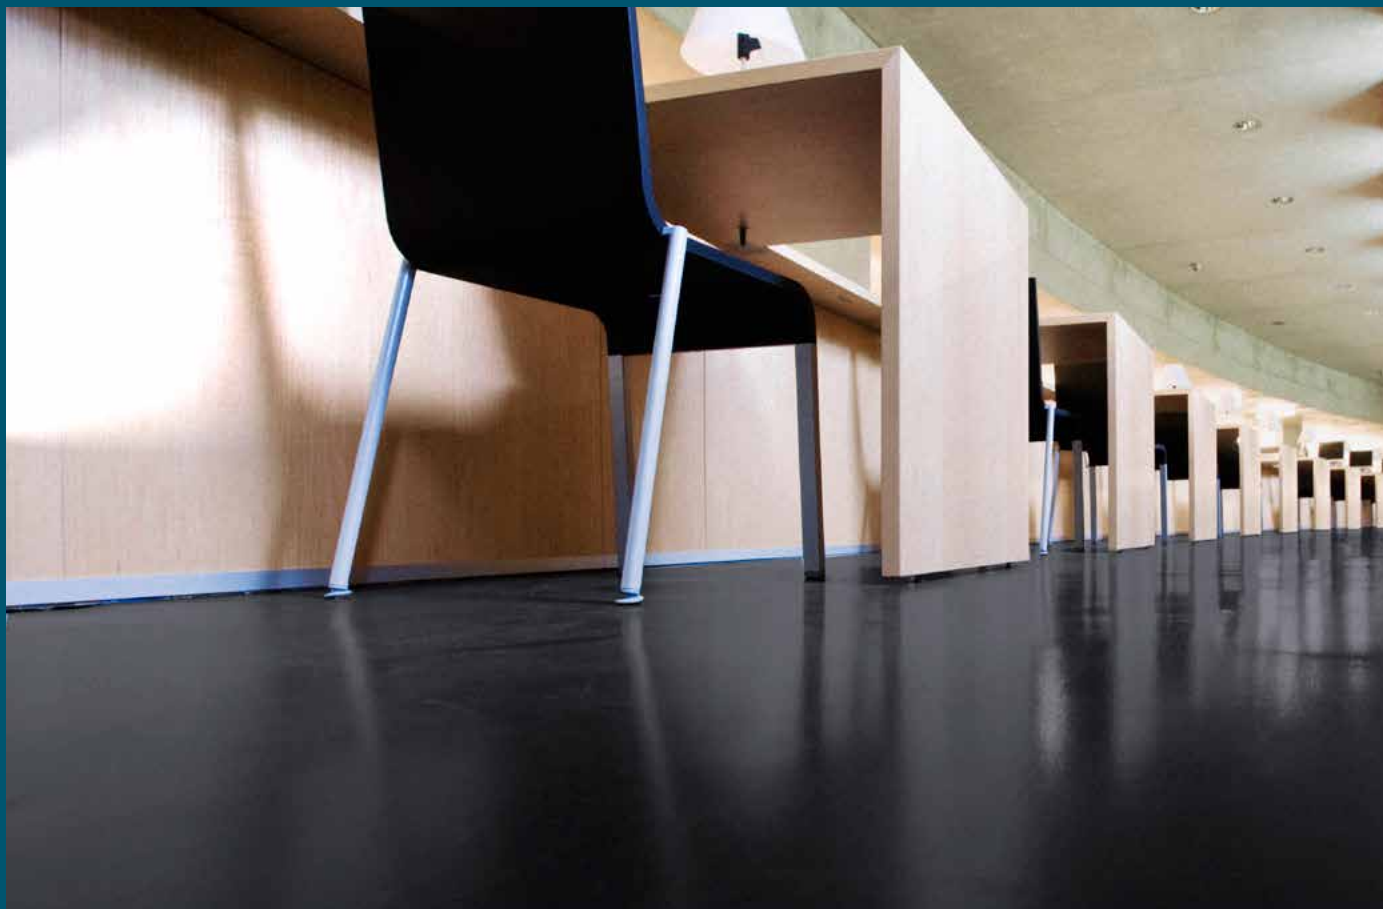

*Economical vinyl tiles in **essential hues***





ADE307



ADE327




ADE330




ADE305



ADE306



ADE332



ADE333




ADE312



ADE309



ADE331



ADE315



AFE301



ADE302



ADE303



ADE328



ADE360



ADE329



ADE317




ADE308




ADE353



ADE361



ADE362



ADE313



ADE310



ADE359



ADE311




ADE341



ADE316




ADE314



ADE340



ADE350



ADE324



ADE348



ADE347



ADE357



ADE344




ADE343



ADE356



ADE319



ADE355



ADE323




ADE334

Typical applications

Schools, hallways, classrooms, cafeterias, lobbies, waiting rooms, retail, supermarkets, cafés, office buildings, general circulation areas

Slip resistance

| | | | |
|--------------------------------|---|---------------|-----------------|
| Static coefficient of friction |  | ASTM C1028-96 | greater than .6 |
|--------------------------------|---|---------------|-----------------|

Specifications

| | | | |
|------------------------------|---|---|----------------------------|
| Thickness | 3.0mm .12" | | |
| Tile dimensions | 18" x 18" 45.7cm x 45.7cm | | |
| Tiles per carton | 15 | | |
| Area per carton | 33.75ft ² 3.13m ² | | |
| Weight | 43.21 lbs/carton 19.6 kg/carton | | |
| Wear layer | 3.0mm, homogeneous construction | | |
| Cleaning technology |  | Factory-finished PU coating | |
| Warranty |  | 10 years | |
| Static load limit |  | ASTM F970 | 1500 psi |
| Fire and smoke performance |  | CAN/ULC - S102.2 ASTM E648 ASTM 662 | Tested Class I < 450 |
| VOC emissions |  | CA 01350 | Pass |
| Vinyl content | Contains 17% vinyl | | |
| Composition | Homogeneous vinyl with through pattern construction | | |
| Installation and maintenance | Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install and/or maintain correctly could void the warranty. | | |
| Staining | Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation. Color should be chosen with expected traffic conditions in mind. | | |

Altro, the future is safer with Altro and Altro Dolce are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2016

LEED facts

LEED v4



This product may help contribute to the following credits:

Altro Dolce Essentials total qualifying credits **5**

| | | |
|---|---|----------|
|  | Materials and resources 15% pre-consumer recycled content 3% post-consumer recycled content | 1 |
|  | Environmental quality Low emitting materials, flooring CA 01350 | 3 |
|  | Environmental quality Low emitting materials, adhesives | 1 |

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit altrofloors.com/sustainability

Color shown: ASFADE329

