




Designed for possibilities.  
Made for people.

# Altro Operetta™

A robust, smooth floor perfect for medium to high traffic areas

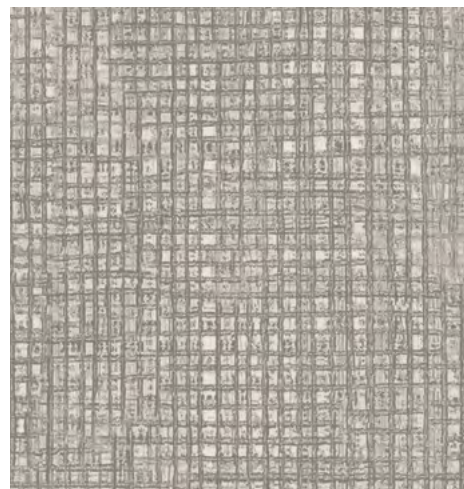

2mm  
thick

6'7"  
width

66'  
length

sheet  
format



**Harmony** OP2107  
WR428 / AM200 LRV 50



**Solo** OP2110  
WR431 / AM200 LRV 53



**Quartet** OP2113  
WR434 / AM200 LRV 49



**Quintet** OP2114  
WR435 / AM200 LRV 26



**Sharp** OP2103  
WR424 / AM200 LRV 32




**Quaver** OP2101  
WR422 / AM200 LRV 48




**Crescendo** OP2102  
WR423 / AM200 LRV 20




**Waltz** OP2106  
WR427 / AM200 LRV 12




**Duo** OP2111  
WR432 / AM200 LRV 26



**Melody** OP2108  
WR429 / AM200 LRV 26



**Trio** OP2112  
WR433 / AM200 LRV 15



**Tempo** OP2115  
WR436 / AM200 LRV 17








**Overture** OP2123  
WR444 / AM200 LRV 24




**Alto** OP2119  
WR440 / AM200 LRV 49




**Contralto** OP2120  
WR441 / AM200 LRV 30



**Bass** OP2121  
WR442 / AM200 LRV 17




**Key** OP2131  
WR452 / AM200 LRV 17




**Canon** OP2129  
WR450 / AM200 LRV 24




**Clef** OP2125  
WR446 / AM200 LRV 37




**Glee** OP2136  
WR457 / AM200 LRV 52



**Soprano** OP2137  
WR458 / AM200 LRV 18



**Baroque** OP2133  
WR454 / AM200 LRV 22




**Tenor** OP2138  
WR459 / AM200 LRV 19



**Madrigal** OP2134  
WR455 / AM200 LRV 31



**Acapella** OP2135  
WR456 / AM200 LRV 34

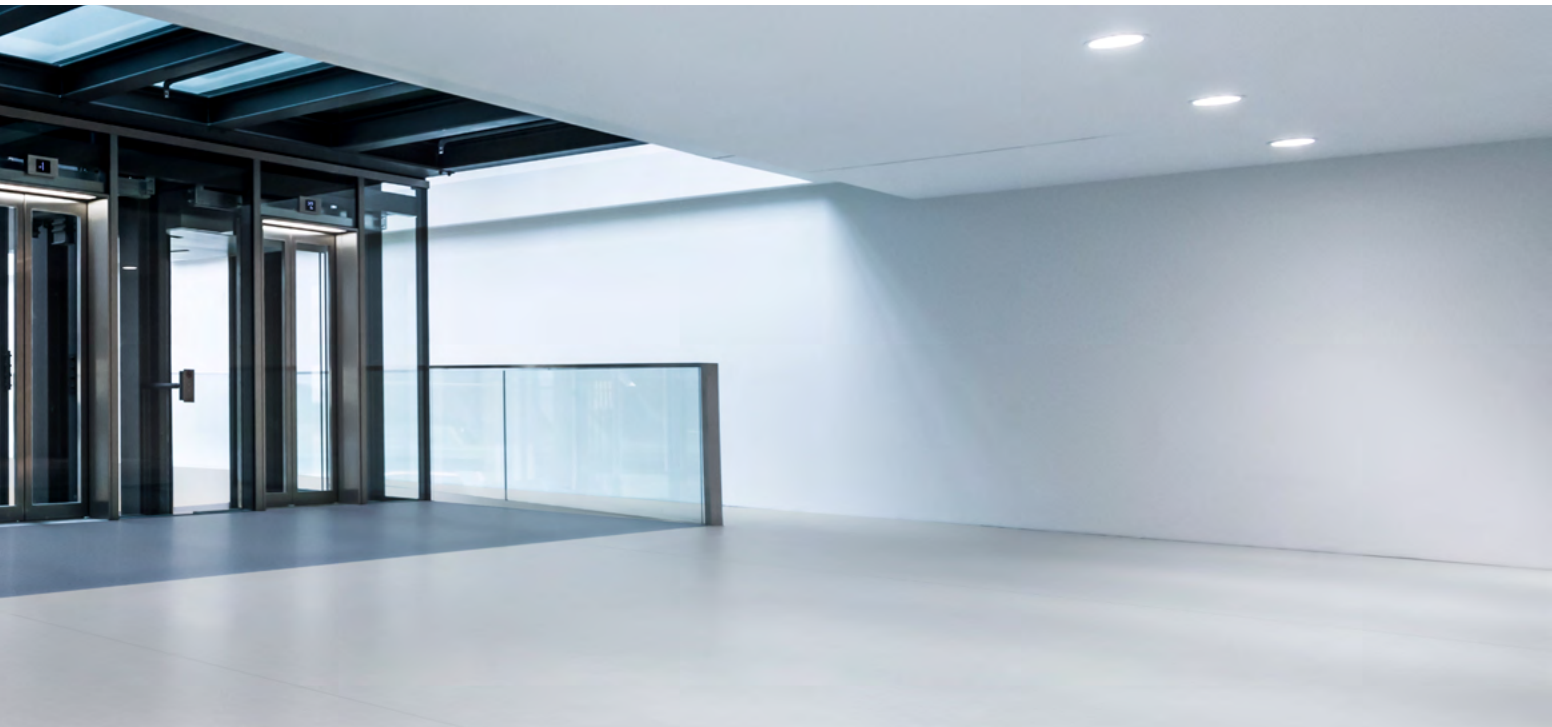








# Altro Operetta

Commercial-grade, smooth, sheet vinyl

## Slip resistance

|                                |   |            |                |
|--------------------------------|---|------------|----------------|
| Static coefficient of friction |  | ASTM D2047 | .7 dry, .8 wet |
| Ramp test                      |  | DIN 51130  | R10            |

## Specifications

|                              |   |  |                            |
|------------------------------|---|--|----------------------------|
| Thickness                    | 2.0mm   |  |                            |
| Roll dimensions              | 6'7" x 66'   2.0m x 20m   |  |                            |
| Weight                       | 4.90 lbs/yd <sup>2</sup>   2.66 kg/m <sup>2</sup>   |  |                            |
| Wear layer                   | .7mm  |  |                            |
| Cleaning technology          |    | Altro Easyclean  |                            |
| Warranty                     |    | 10 years   |                            |
| Static load limit            |    | ASTM F970  | 2000 psi                   |
| Sound insulation             |    | ISO 10140  | 4dB                        |
| Fire and smoke performance   |    | CAN/ULC - S102.2<br>ASTM E648<br>ASTM E662                 | Tested<br>Class I<br>< 450 |
| VOC emissions                |    | CA 01350<br>FloorScore                                     | Pass<br>Certified          |
| Bio-based content            |    | Manufactured with 17% rapidly renewable bio-based content. |                            |
| Composition                  | Heterogeneous PVC with glass fiber reinforcement scrim between the film print and backing. Altro Easyclean incorporated into top layer for exceptional cleanability.  |  |                            |
| Backing                      | Compact PVC backing.  |  |                            |
| Installation and maintenance | Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at <a href="http://altrofloors.com/downloads">altrofloors.com/downloads</a> , training clinic information at <a href="http://altrofloors.com/training">altrofloors.com/training</a> . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at <a href="http://altrofloors.com/downloads">altrofloors.com/downloads</a> . Failure to install, heat weld, and/or maintain correctly could void the warranty. |  |                            |
| Staining                     | Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.   |  |                            |

Altro, Altro Operetta and Altro Easyclean are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2017

## LEED facts



LEED v4

This product may help contribute to the following credits

### Altro Operetta

7

|   |  |   |
|---|--|---|
|  | Materials and resources<br>Renewable bio-based content       | 1 |
|  | Materials and resources<br>Environmental product declaration | 1 |
|  | Materials and resources<br>Health product declaration        | 1 |
|  | Environmental quality<br>Low emitting materials, flooring    | 3 |
|  | Environmental quality<br>Low emitting materials, adhesives   | 1 |

Discover more of our sustainability story and credentials at [altro.com/sustainability](http://altro.com/sustainability)

Follow us



USA 800 377 5597

CANADA 800 565 4658

[support@altrofloors.com](mailto:support@altrofloors.com)

[www.altro.com](http://www.altro.com)