




## Altro Wood<sup>™</sup>

Smooth sheet vinyl in realistic wood visuals



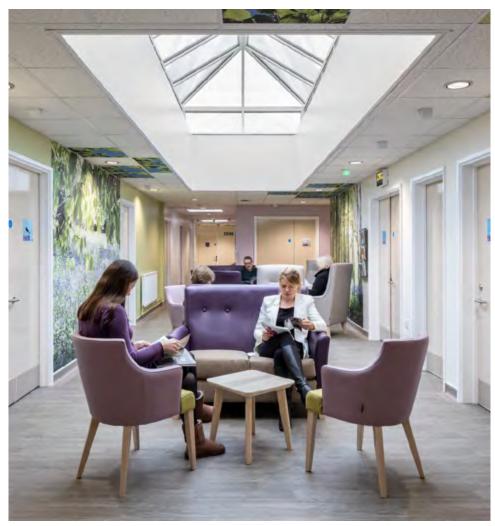












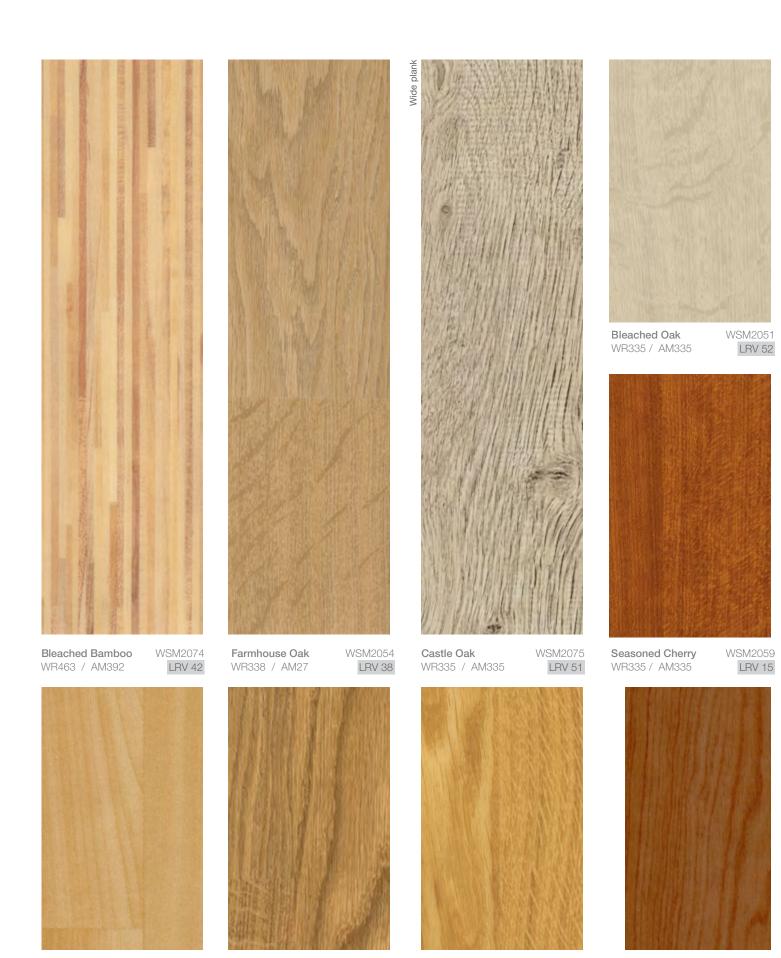

Honey Beech WR462 / AM462

WSM2071 LRV 43

Oak Traditions WR353 / AM225

WSM2069 LRV 25

Rustic Oak WR340 / AM340

WSM2056 LRV 37


Mellow Maple WR352 / AM352


WSM2068 LRV 27



Imperial Oak

WR467 / AM467

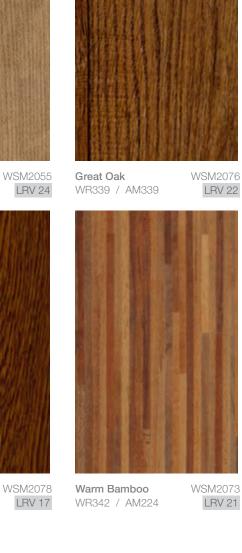

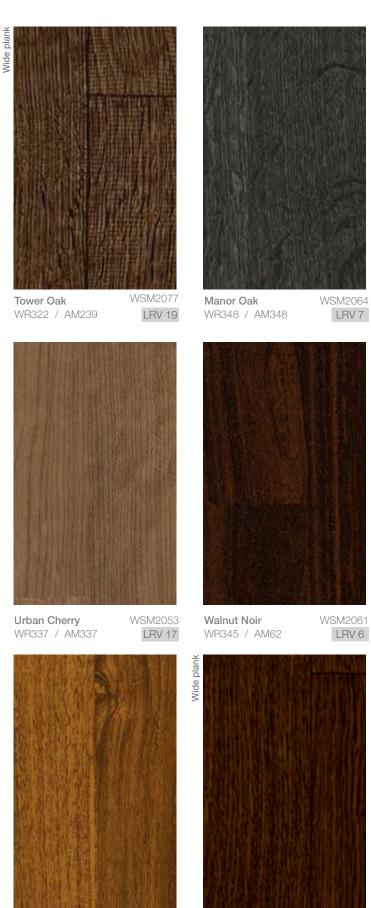



## **Altro Wood**

Wood-look sheet vinyl in realistic wood visuals

Slip resistance					
Static coefficient of friction	.79 <b>D</b> .94 <b>W</b>	ASTM D2047	.79 dry, .94 wet		
Ramp test	$R_{10}$	DIN 51130	R10		
TRRL pendulum test	PTV ≥36	BS 7976	36+		

Specifications				
Thickness	2.0mm			
Roll dimensions	6'7" x 66'   2.0m x 20m			
Weight	4.90 lbs/yd <sup>2</sup>   2.66 kg/m <sup>2</sup>			
Wear layer	.7mm			
Cleaning technology	abo EASYCLEAN	Altro Easyclean		
Warranty	10 year product warranty	10 years		
Static load limit	À	ASTM F970	2500 psi	
Sound insulation	(((©)	ISO 140-8	4dB	
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450	
VOC emissions	VOC	CA 01350 FloorScore	Pass Certified	
Bio-based content	bio-based content	Manufactured with 17% rapidly renewable bio-based content.		
Composition	Heterogeneous PVC with glass fiber reinforcement scrim between the film print and backing.  Altro Easyclean incorporated into top layer for exceptional cleanability.			
Backing	Compact PVC backing.			
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads, training clinic information at altrofloors.com/training. Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads. Failure to install, heat weld, and/or maintain correctly could void the warranty.			
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.			

**LEED facts** This product may help contribute to the following credits LEED v4 Altro Wood Materials and resources 1 Renewable bio-based content Materials and resources 1 Environmental product declaration Materials and resources 1 Health product declaration Environmental quality 3 Low emitting materials, flooring Environmental quality 1 Low emitting materials, adhesives

Discover more of our sustainability story and credentials at altro.com/sustainability

Film	Plank length	Plank width	Repeat
Bleached Oak	2 x 500mm	100mm	1m
Rustic Oak			
Oak Traditions			
Washed Oak			
Manor Oak			
Farmhouse Oak			
Autumn Maple		100mm	1m
Vintage Cherry	1 x 550mm, 1 x 450mm (Alternating)		
Seasoned Cherry			
Urban Cherry			
Walnut Noir			
Antique Walnut			
Mellow Maple			
Honey Beech	3 x 333.3mm	62.5mm	1m
Castle Oak			
Tower Oak	1000mm	125mm	1m
Great Oak			
Imperial Oak	1000mm	166mm	1m
Sovereign Oak			

Follow us



© Copyright Altro USA 2017

Altro, Altro Wood and Altro Easyclean are all trademarks of Altro Limited. Folder content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.