


## AL Bar AC

Client:	
Project:	
Type:	
Order Code:	
Quantity:	

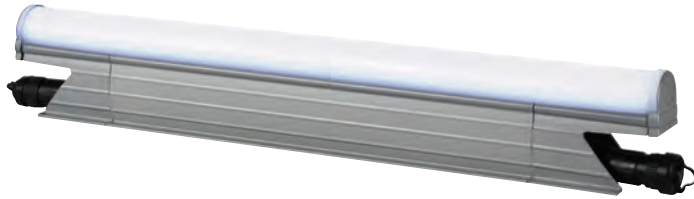


AL Bar AC is a 2' (600) or 4' (1200) outdoor rated LED fixture featuring a diffused cover and linkable power. It can be separated up to 10 pixels per tube (1200) make it a great fixture for low resolution graphics display and exterior edge lighting.

### SPECIFICATIONS

Color Temperature	RGB
Beam Angle	120°, Frosted Lens
Max Fixture Runs	65ft / 20m
Power Consumption	10W (600) , 20W (1200)
Housing	Aluminum Extrusion With Polycarbonate Lens / UV Stabilizer
Operating Temp	-40° - 104° F (-40° - +40° C)
Operating Voltage	100-277VAC
Control	DMX 512, Auto Addressing
Pixels	5 (600), 10 (1200)
Fixture Connectors	8 PIN WP IP67
Rating	IP65, Wet Location
Warranty	5 Years
Weight	4.4 lbs (2kg) / 8.8 lbs. (4kg)
Dimensions	23.6" x 2.6" x 3.5" (600 x 66 x 90.3mm)
Certifications	



### DIMENSIONS

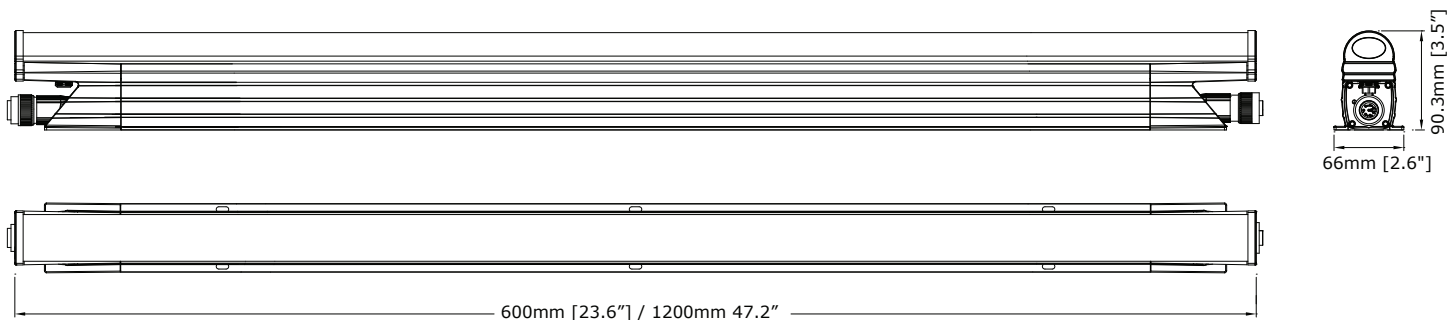

Client:	
Project:	
Type:	
Order Code:	
Quantity:	

### ORDER CODES

**ABA . 232 . A    HN**

LENGTH

**A** - 2' (600mm)

**B** - 4' (1200mm)

### RELATED COMPONENTS

<b>CA-BCJ-00000</b>	8 Pin WP Junction Box, Hardwire
<b>CA-BCJ-00100</b>	8 Pin WP Junction Box, Includes Attached Lead Cables, XLR 3 Pin Male & Edison
<b>CA.BCL.00100</b>	8 Pin WP Cable 3' (1m)
<b>CA.BCL.00200</b>	8 Pin WP Cable 6.5' (2m)
<b>CA.BCL.00500</b>	8 Pin WP Cable 16' (5m)
<b>CA.BCL.01000</b>	8 Pin WP Cable 32' (10m)
<b>CO-BCF-00000</b>	8 Pin WP Female IP Connector
<b>CO-BCM-00000</b>	8 Pin WP Male IP Connector
<b>CA-BCS-05000</b>	8 Pin WP Cable Spool 50m

### WIRING

