


## AL Fade 6 II

|             |  |
|-------------|--|
| Client:     |  |
| Project:    |  |
| Type:       |  |
| Order Code: |  |
| Quantity:   |  |

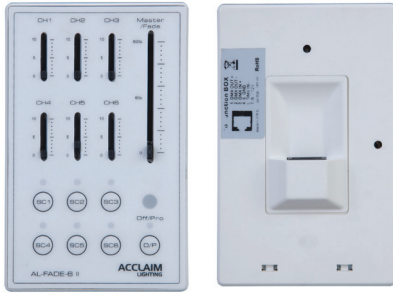

**AL-Fade 6 II** is a wall-mount, 6 ch DMX controller, designed to fit onto a single gang US junction box. Included is a wireless remote and power/data supply for DMX output control of 6 channels with manual control of RGB and 6 programmable scenes with up to 99 steps each. New features on the AL Fade 6 II include the ability to set the DMX start channel, smoother faders, and a completely redesigned front panel.

### ORDER CODES

**DMX-ALF-06BU - US Version, White**

### SPECIFICATIONS

|                              |   |
|------------------------------|---|
| <b>Power Input</b>           | 120V / 60Hz to the Junction Box 1 (Included)                  |
| <b>DMX Control Channels</b>  | 6   |
| <b>Interface</b>             | 6 Manual Faders   |
| <b>Output</b>                | DMX 512   |
| <b>Mounting</b>              | Single Gang Electrical Box (Not Included)                     |
| <b>Housing</b>               | White Polycarbonate   |
| <b>Operating Temperature</b> | 14°F to 122°F (-10°C to 50°C)                                 |
| <b>Connectors</b>            | Screw Terminals for Data & Power Connections, CAT 5 to Keypad |
| <b>Rating</b>                | IP20, Dry Location  |
| <b>Warranty</b>              | 2 Years   |
| <b>Weight</b>                | 5.3 oz. (150g)  |
| <b>Dimensions</b>            | W 3" x H 4.7" x D 0.6" -<br>(76 mm x 120 mm x 15.5 mm)        |

#### Certifications

**CE RoHS**

### DIMENSIONS

