


AL GRAZE AC™

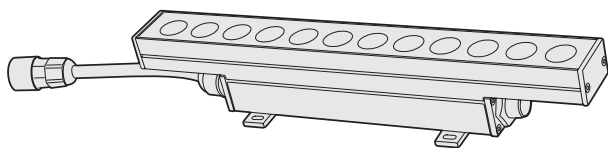

Client:

Project:

Type:

Order Code:

Quantity:

The **AL Graze AC** is a high power, low profile, outdoor linear LED fixture. Featuring a robust IP66 housing, on-board AC + DMX driver, and linkable cable system, it is the perfect option for any structure that calls for indoor or outdoor linear grazing.

SPECIFICATIONS

Color	2700K, 3000K, 3500K, 4000K, RGB, RGBW, RGBA, DW (2400K-5500K)
Beam Angle	10° x 60°, 30° x 60°, 10° x 10°, 60° x 60°
Max Fixtures In Series	50' @ 120V, 100' @ 277VAC
Total Lumens	419 per foot (4000K, 30° x 60° 1')
Control	DMX-512 (internal), 0-10V (via external UDM)
Mounting	30° Swivel Mount and Fixed Flat Mount Included
Power Consumption	9W per linear foot
Operating Voltage	100-277VAC
Lumen Maintenance	L70 @ 150,000 Hours (25° C)
Finish	Silver, Anodized Aluminum
Housing Material	Aluminum body; Glass Top Lens
Operating Temperature	-4°F to 123°F (-20°C to 50°C)
IP Rating	IP66, Wet or Dry Location
Fixture Connectors	Multipin IP66 Connectors, End to end jumpers attached to each fixture
Warranty	5 Years
Weight	1' - 1.25 lbs / 0.6 kg, 4' - 5 lbs / 2.3 kg
Dimensions	See dimensions section on page 2 for options


Certifications




AL GRAZE AC™

ORDER CODES

* Indicates Special Order

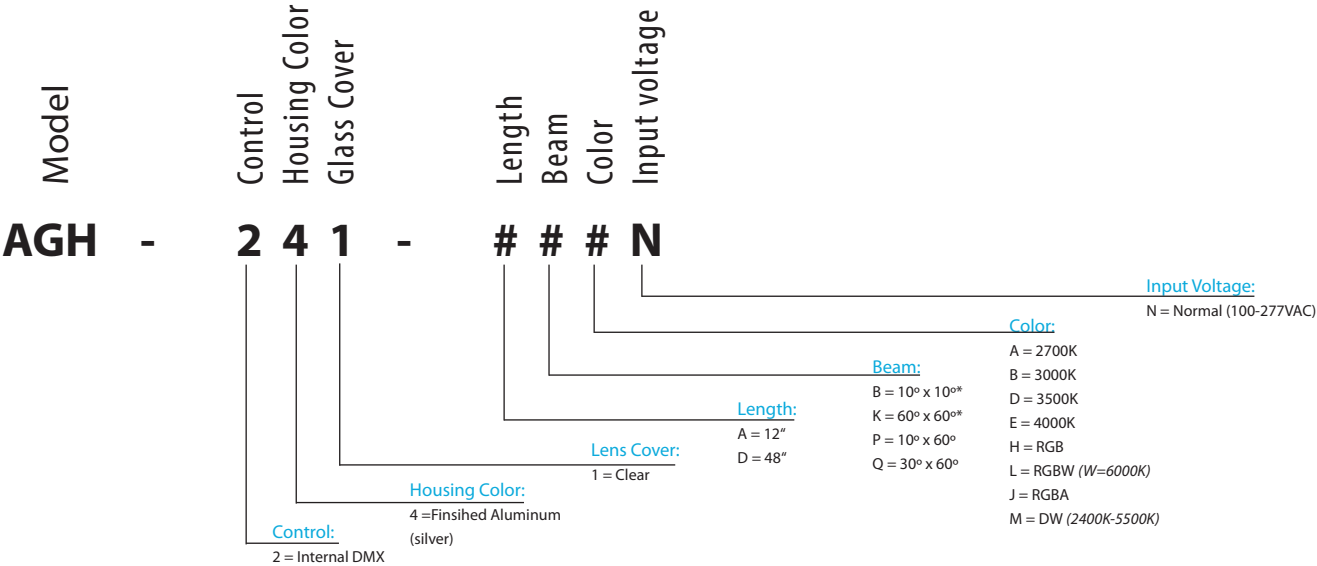


DIMENSIONS

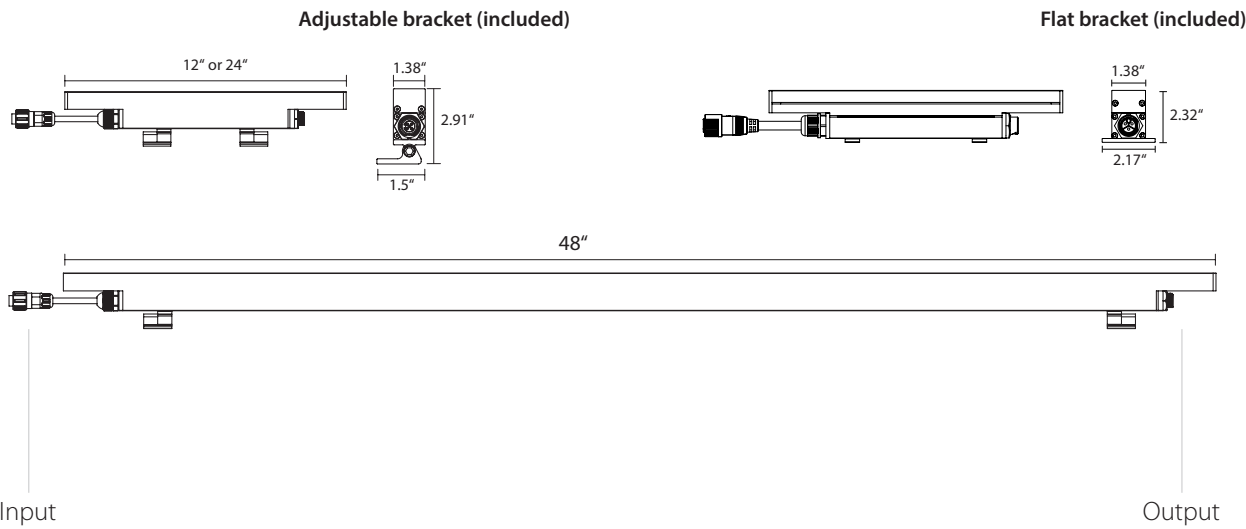


AL GRAZE AC™

RELATED COMPONENTS


Connection Cables




AGHFC10
10' Feed Cable For AL Graze AC + End Cap
Powers up to 50' @ 120VAC



AGHLC1
1' Link Cable for AL Graze AC



AGHLC5
5' Link Cable for AL Graze AC




AGHLC10
10' Link Cable for AL Graze AC



AGHEC
End Cap for AL Graze AC


Mounting Accessories



ALHEB6
AL Graze Extender Bar 6"

ALHEB12
AL Graze Extender Bar 12"


ALHEB36
AL Graze Extender Bar 36"



AGLV12
12" Louver for AL Graze DC

AGLV48
48" Louver for AL Graze DC

Fixture Setup Accessories



XMT350
DMX + RDM Addressing and Testing Tool