ACCLAIM LIGHTING

AL Tube Pro

Client:	
Project:	
Type:	
Order Code:	
Quantity:	

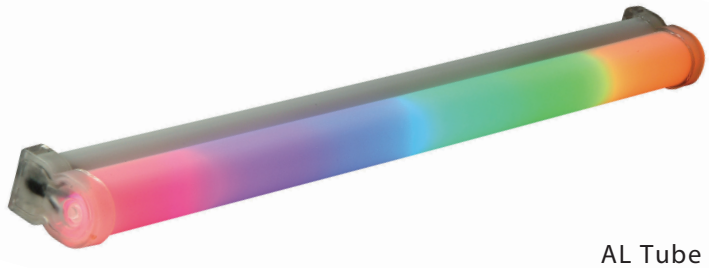

AL Tube Pro is a frosted, linear, outdoor rated LED fixture with RGB LED's. It's low profile design and four inch pixel sections make it a great solution for visual effects.

SPECIFICATIONS

Color Temperature	RGB
Beam Angle	120º, Frosted Lens
Max Fixture Runs	26' (8m)
Power Consumption	8W (500) / 15W (1000)
Total Lumens	75 (500) / 150 (1000)
Housing	Polycarbonate With UV Stabilizer
Operating & Storage Temp	32°F - 104°F (0°C to +40°C)
Operating Voltage	24VDC
Control	DMX512, Setup With XB-R1
Fixture Connectors	5 Pin WP Cable
Rating	IP65, Wet Location
Warranty	5 Years
Weight	0.9 lbs (0.4kg)
Dimensions	19.7" / 39.3" x 1.3" x 4.7" (500/1000 x 35 x 67mm)
Certifications	

DIMENSIONS

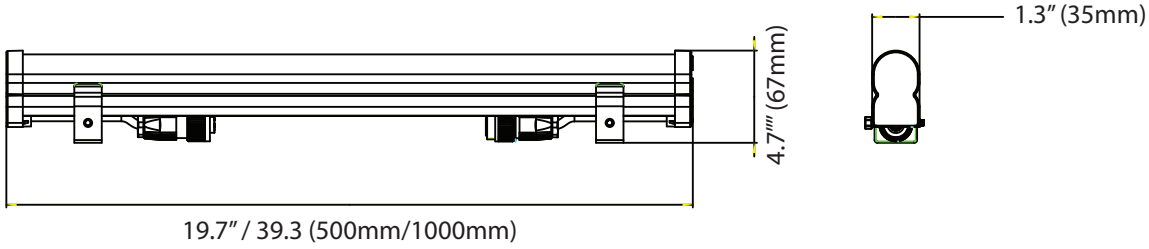

Lumen measurements comply with IES LM-79-08 provided by a recognized, independent testing lab.
LM79 Photometry, LM80 LED source compliance documents, and IES files are available at www.acclaimlighting.com

Specification subject to change without notice.

ACCLAIM LIGHTING

AL Tube Pro

Client:	
Project:	
Type:	
Order Code:	
Quantity:	

ORDER CODES

ATA . 222 . _ AHN

LENGTH

A - 19.6" (500mm)
B - 39.3" (1000mm)

RELATED COMPONENTS

CA-BCJ-00000	X-PD-150 Power Supply / DMX Driver
CA-BAL-00100	5 Pin WP Cable 3' (1m)
CA-BAL-00300	5 Pin WP Cable 10' (3m)
CA-BAL-01000	5 Pin WP Cable 32' (10m)
CO-BAF-00000	5 Pin WP Female IP Connector
CO-BAM-00000	5 Pin WP Male IP Connector
CA-BAS-10000	5 Pin WP Cable Spool 328' (100m)
CA-BAF-00200	5 Pin WP First Cable 6.5' (2m)

WIRING

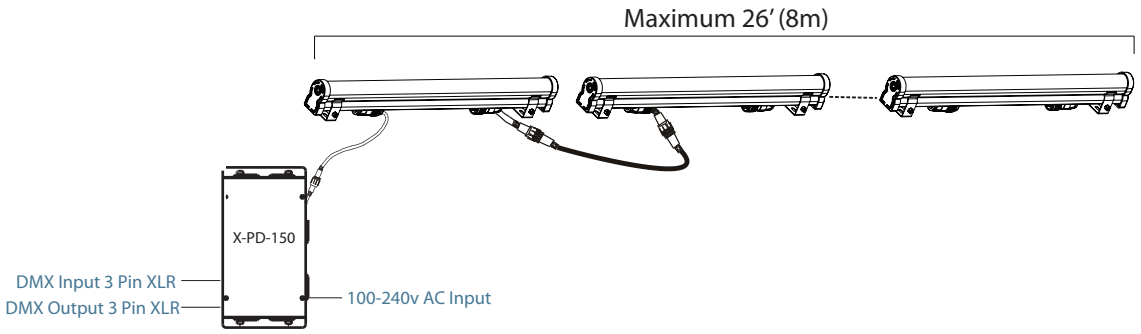

Lumen measurements comply with IES LM-79-08 provided by a recognized, independent testing lab.
LM79 Photometry, LM80 LED source compliance documents, and IES files are available at www.acclaimlighting.com

Specification subject to change without notice.