
# APS-120-12





Client:
Project:
Type:
Order Code:
Quantity:

The APS-120-12 is a 120W / 10A, 12VDC, DIN rail mount power supply. They are cULus approved, feature a convection cooled design, and are designed to work with all 12VDC fixtures from Acclaim.

#### **Specifications**

**AC Input Voltage Range** 93 - 132 / 186 - 264VAC, Single Phase, Auto Select **DC Output Voltage** 12VDC (Adjustable from 11.4 to 14.5VDC) 120W **DC Output Wattage DC Output Current** 10A **Input Frequency** 47 - 63Hz **Inrush Current** 24A / 48A (115 / 230VAC) **Output Voltage Accuracy** -0, +1% of Nominal Ripple and Noise (20MHz BW) 50mV 110 - 145% Over Current Protection (Typ) **Over Voltage Protection** 15 - 17.4VDC Dry Location Use Only Rating **Compatible DIN Rails** TS35/7.5 or TS35/15 **Housing Material** Powder Coated Aluminum, Blue Finish **Operating Temperature** -40 to +71°C **Storage Temperature** -40 to +85°C 2 Year Limited Warranty Warranty 2 lbs. (920 g) Weight Dimensions (in) 2.5 x 4.92 x 4.59" Cooling Convection Certifications


CE

# APS-120-12



#### **Order Codes**


• Indicates Special Order

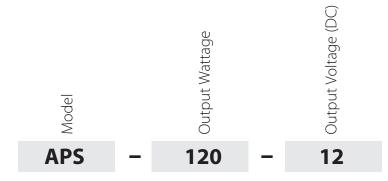


### **Compatible Products**


Flex II

#### **Dimensions**

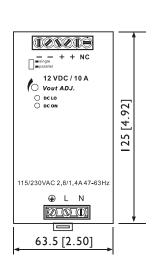

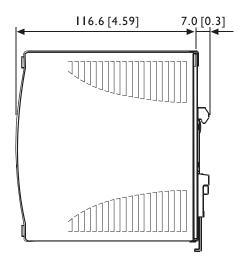

### Wiring

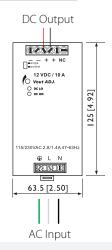

acclaimlighting.com