


APS-300-24 IP™

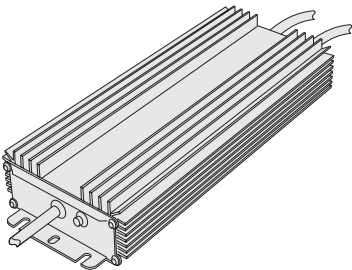

Client:

Project:

Type:

Order Code:

Quantity:

The **APS-300-24 IP** is a 300W /12.5A 24VDC wet location power supply. It features a 100-277VAC input, over-current, over-voltage, and over-voltage protection. It has two parallel 24VDC outputs.

SPECIFICATIONS

Input Voltage	100-277VAC, 50/60Hz
Output Voltage	24VDC
DC Output Wattage	300W maximum
DC Output Current	12.5A maximum
Input Frequency	50/60 Hz
Input Current	3.3A (120VAC) / 1.6A (240VAC)
Inrush Current	25A (120VAC) / 50A (240VAC)
Turn on Time	0.2 seconds maximum
Hold up Time	20 mS
Finish	Gray with black cables
Housing Material	Aluminum
IP Rating	IP66, Wet Location (excludes cable ends and Input IEC - place in an enclosure)
Ambient Operating Temperature	-31° F to 158° F (-35° C to 70° C)
Cables	Input: 3' Locking IEC to bare wire / Output: 3' IP68 2 pin to bare wire
Warranty	3 Years, Limited
Weight	4.2 lbs (1.9 kg)
Dimensions	L 9.88" x W 3.85" x H 1.75" (L 251 x W 91 x H 44.5mm)
Certifications	<div> <div> </div> <div> </div> <div> </div> </div>

APS-300-24 IP™

ORDER CODE

Model	Wattage	DC Output Voltage
APS - 300 - 24 - IP		

- Compatible with:**
- Flex III
 - Flex Pro
 - Flex Eco
 - Flex Spectrum
 - Flex Tube
 - Flex Tube SE
 - AL Graze DC CV
 - Rebel Drum Series CV