


DYNA DRUM SO QW PENDANT™

ACCLAIM
LIGHTING



Client:

Project:

Type:

Order Code:

Quantity:

The **Dyna Drum SO QW Pendant** is a high output, outdoor rated, quad color LED pendant fixture. It features 12", 24", and 36" NTS pole options, on-board digital display, a 100-277VAC internal power supply, and a built in receiver for the Aria wireless DMX system. It is ideal for large scale indoor or outdoor down light applications.

SPECIFICATIONS

Color Temperature	QW (RGBW, W=6000K)
Beam Angle	10° (standard), 20°, 40°, 60°, 10° x 60° spread lens options
Total Lumens	4351 @ 6°
Center Beam Candela	97,231 @ 10°
Control	DMX-512, 0-10V via external UDM, wireless DMX via Aria
Max Fixtures in Series	32, via DMX-512
Mounting	12", 24", or 36" NPS pipe options (1" NPS, OD = 1.315")
Power Consumption	147W at steady state
Operating Voltage	100-277VAC, 50/60Hz
Lumen Maintenance	L70 @ 150,000 Hours (25° C)
Finish	Gray (Standard), White, Black or Custom (Optional)
Housing Material	Die Cast Aluminum, Optional Marine Environment Coating Available
Operating Temperature	-40° F to 122° F (-40° C to 50° C)
IP Rating	IP66, Wet or Dry Location
Fixture Connectors	Attached 5' (1.5m) IP 66 AC Power + Signal Cable
Warranty	5 Year Limited Warranty
Weight	30 lbs (13.6 kg)
Dimensions	ø 11.3" x H Various / See page 3 (ø 288mm x H Various)
Certifications	




DYNA DRUM SO QW PENDANT™


ACCLAIM LIGHTING

ORDER CODES

* Indicates Special Order

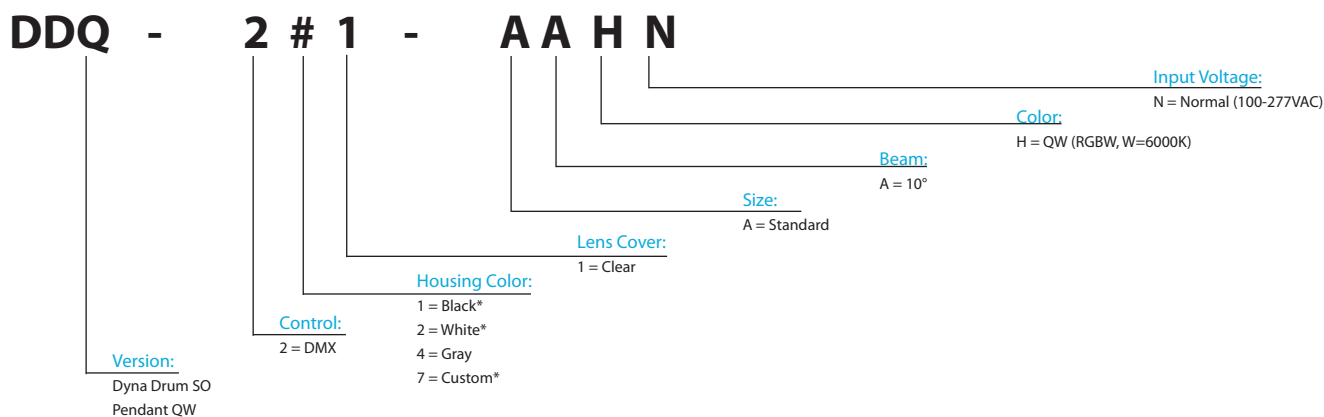

RELATED COMPONENTS



NPS Pipe (Required)

(1" NPS, OD = 1.315")

12" Gray : NPS12G

24" Gray : NPS24G


36" Gray : NPS36G

*For other colors substitute G above for:

W = White


B = Black

C = Custom (provide RAL #)



UDM

Converts 0-10V (sink or source) to DMX
100-277VAC Input




Half Snoot

Gray: DDSOHSG

Black: DDSOHSB

White: DDSOHSW

Includes four M4 mounting screws




Full Snoot

Gray: DDSOFSG

Black: DDSOFBS

White: DDSOFSW

Includes four M4 mounting screws



Spread Lens Kits


20° Beam: DDSSL20

40° Beam: DDSSL40

60° Beam: DDSSL60

10° x 60° Beam: DDSSL1060

Includes four M4 mounting screws



Aria Wireless DMX System

Transceiver with direct wireless connection

100-277VAC Input


2600' Line of sight range

Order Code: Aria WDS


DYNA DRUM SO QW PENDANT™

ACCLAIM LIGHTING

DIMENSIONS

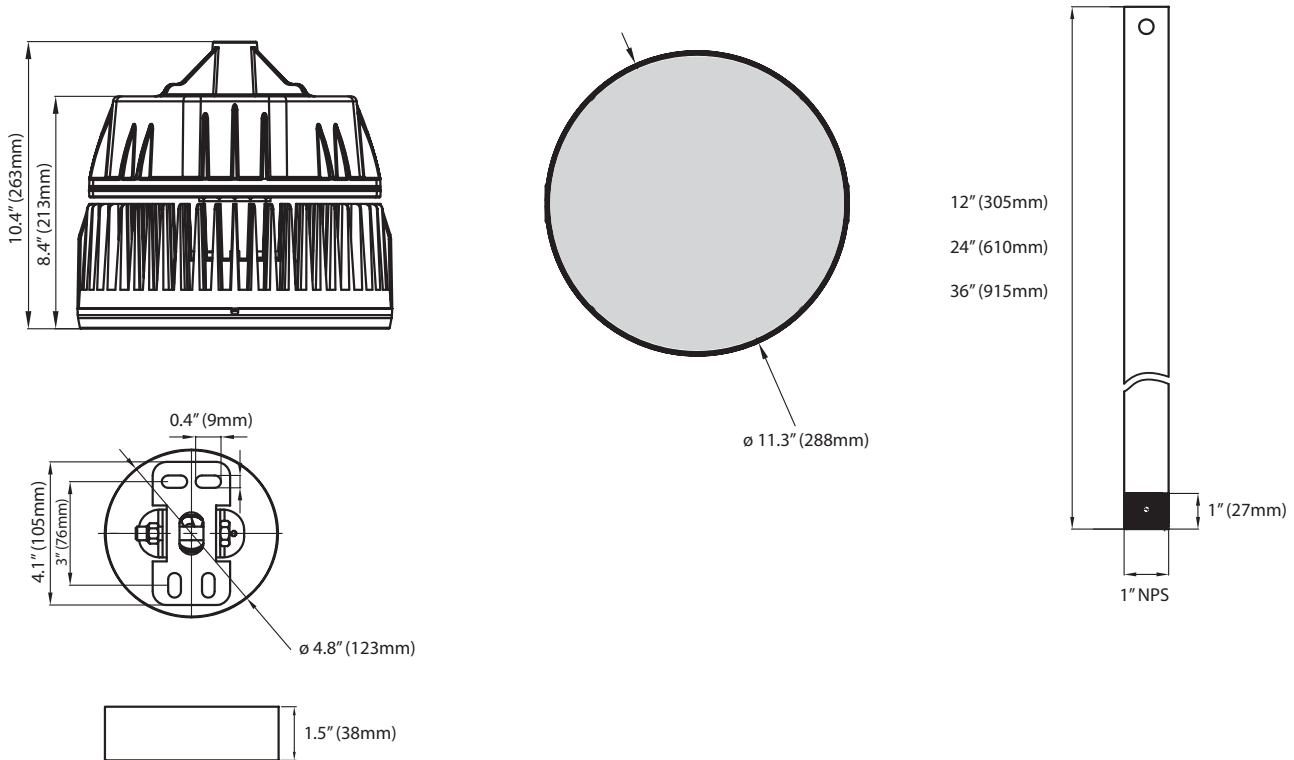

WIRING

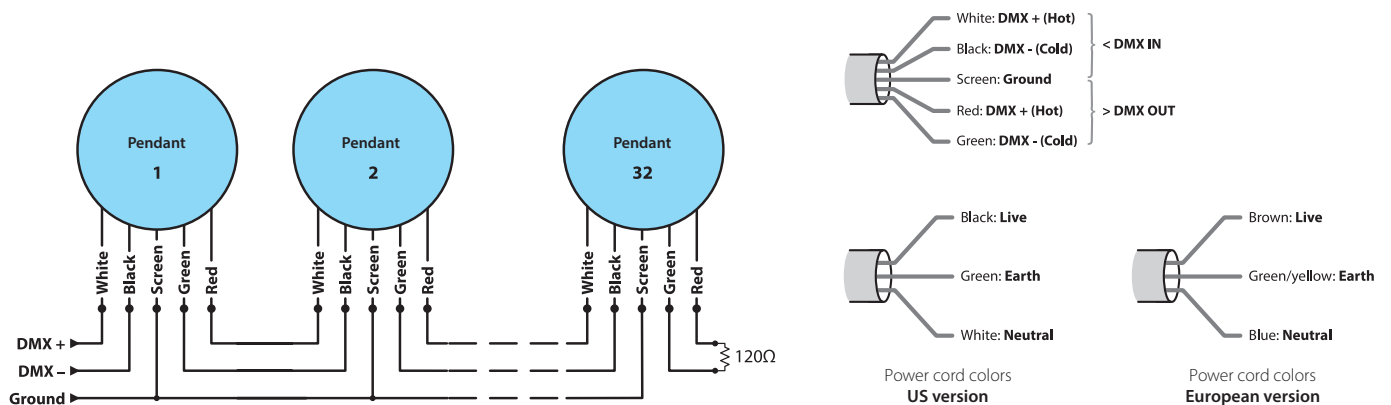

DYNA DRUM SO QW PENDANT™



PHOTOMETRICS

For IES & Revit files, please visit acclaimlighting.com

Color Temp	Lumens	Center Candela	Efficacy (l/pw)	CRI (Ra)	CRI (r9)
QW	4351	97231	33.75	N/A	N/A