

DynaCove Exterior

Client:	
Project:	
Type:	
Order Code:	
Quantity:	



The **DynaCove Exterior** is a high power, white LED, outdoor linear cove fixture. Available in 1' and 4' sections, it offers smooth linear dimming with ELV modules, and 100-1% with most commercially available TRIAC dimmers. Featuring class-leading output, robust housing, LSF filter options, and a glare shield, it is the perfect option for any cove, millwork, and signage application.


SPECIFICATIONS

Color Temperature	2,700k, 3000k, 3500k, 4000k
Beam Angle	120°
Max Fixture Runs	35' (10.6m) @ 120V / 70' (21.3m) @ 240V+
Power Consumption	20w (1') / 80w (4')
Total Lumens	853 (1') @ 2700k, 4,010 (4') @ 4000k
Efficacy (lm/W)	37 @ 2700k / 40 @ 3000k, 35 @ 3500k, 44 @ 4000k
CRI	86 @ 4000K
Lumen Maintenance	70% @ 50,000 Hours
Finish	Anodized Brushed Aluminum
Housing	Aluminum; Frosted Polycarbonate Lens
Operating Temperature	-40°F to 122°F (-40°C to 50°C)
Operating Voltage	90-135VAC, 200-300VAC
Dimming	ELV or TRIAC
Fixture Connectors	Integral, 3 Pin Male & Female Connector
Rating	IP 66, Wet Location
Warranty	5 Years
Weight	1' 3 lbs (1.4 kg) 4' 12 lbs (5.4 kg)
Dimensions	W 2.9" x H 3.6" x L 12" / 48" (74.1 mm x 91.5 mm x 305 mm / 1,220 mm)

Certifications




DIMENSIONS

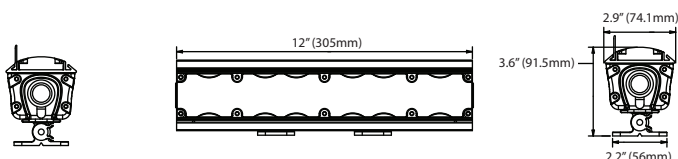

Client:	
Project:	
Type:	
Order Code:	
Quantity:	

DynaCove Exterior

ORDER CODES

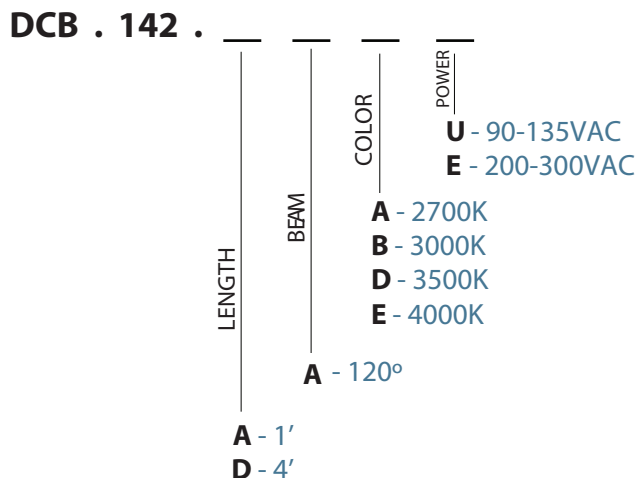

RELATED COMPONENTS

CA-CBF-00305-MF	Start Cable for DynaCove Exterior 10'
CA-CBL-00000-MF	Link Cable for DynaCove Exterior, End to End
CA-CBL-00030-MF	Link Cable for DynaCove Exterior, 1'
CA-CBL-00150-MF	Link Cable for DynaCove Exterior 5'
CA-CBL-00305-MF	Link Cable for DynaCove Exterior 10'
CA-CBE-00000	DynaCove Exterior End Cap
DYNAHEB6	Dyna HO Extender Bar 6"
DYNAHEB12	Dyna HO Extender Bar 12"
DYNAHEB36	Dyna HO Extender Bar 36"
DYNAHMF90	Dyna HO 90° Mounting Bracket

WIRING

