

DynaFlood HO

Client:	
Project:	
Type:	
Order Code:	
Quantity:	



DynaFlood HO is a high powered flood fixture designed for exterior illumination and outdoor signage. Its integral power supply is universal voltage and can be dimmed via ELV or TRIAC. The head pivots 180° to help you get the exact angle needed for your application.


SPECIFICATIONS

Color Temperature	2700k, 3000K, 3500K, 4000k
Beam Angle	7° Standard, 20°, 40°, 10° x 60°, 60° via LSF Filter
Drive Current	500ma
Power Consumption	50W
Total Lumens	2455 @ 4000K, 7°
Efficacy (lm/W)	49
CRI	79
Lumen Maintenance	70% @ 50,000 hours
Housing	Die Cast Aluminum
Operating Temperature	-40°F to 122°F (-40°C to 50°C)
Operating Voltage	90-135VAC / 200-300VAC
Dimming	ELV, TRIAC
Fixture Connections	2 Conductor, Bare Wire Leads
Rating	IP 66, Wet Location
Warranty	5 Years
Weight	6 lbs (2.7 kg)
Dimensions	W 9.6" x H 13.9" x D 5.9" (245 mm x 221 mm x 149.5mm)

Certifications



DIMENSIONS

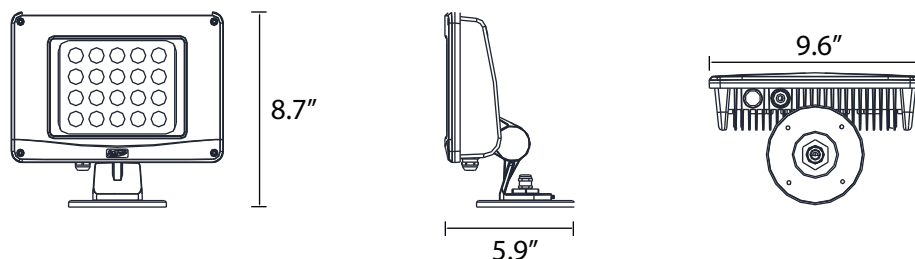

DynaFlood HO

Client:	
Project:	
Type:	
Order Code:	
Quantity:	

ORDER CODES *special order

DFB.1 1.A

Housing	Beam	Color	Input Voltage
			U - 90-135VAC
			E - 200-300VAC
	A - 2700K*		
	B - 3000K		
	D - 3500K*		
	E - 4000K		
	B - 7°		
	E - 20°		
	H - 40°		
	P - 10° x 60°		
	K - 60°		
1 - Black*			
2 - White*			
4 - Grey			

RELATED COMPONENTS

DYNAFEB6	Dyna Flood Extender Bar 6"
DYNAFEB12	Dyna Flood Extender Bar 12"
DYNAFEB36	Dyna Flood Extender Bar 36"
DYNAFGS	Dyna Flood Glare Shield
DYNAFHWG	Dyna Flood HO Wire Guard

WIRING

