



## 206VCFLWW

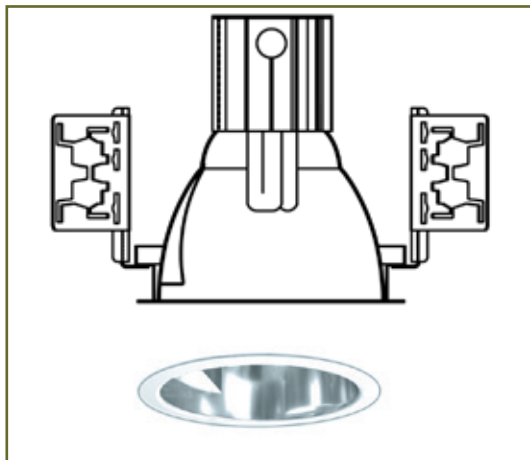

**DIMENSIONS**      **ROUGH IN: 6-3/8" (162mm)**

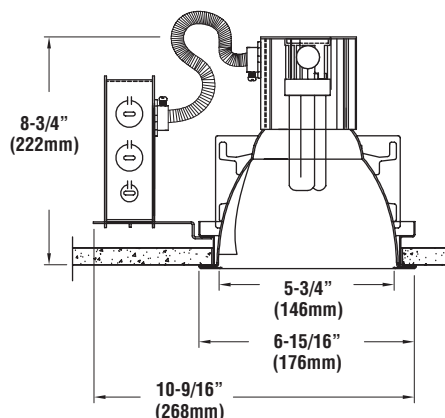

**ARRA**  
Funding Compliant

## 6" VERTICAL FLUORESCENT - OPEN WALL WASH

### PRODUCT HIGHLIGHTS

- Premium quality open reflector with semi specular wall wash insert.
- .050" spun aluminum reflector available in low-iridescent Alzak® or painted finishes. White self-trim flange.
- Vertical orientation provides asymmetrical beam spread for even wall illumination.
- Computer-aided design optimizes visual comfort, efficiency and distribution.
- Reflector and kicker can be rotated after installation.
- Socket adjustable from below ceiling without tools.

**CONSTRUCTION** - Frame-in housing constructed of galvanized heavy gauge steel. Socket housing made of extruded aluminum.


**ELECTRICAL** - Ballasts are Class P, solid state electronic, universal voltage (120V thru 277V) with end-of-life shutdown protection.

**MOUNTING** - Minimized overall housing dimensions simplify installation and access to junction box. Butterfly brackets accept 27" or 52" C-Channels, nailer bars or EMT conduit. Accommodates ceilings up to 1" thick.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.

**LISTING** - UL listed to U.S. and Canadian safety standards. Non-IC rated. Suitable for damp locations. Listed for use with thru wiring. IBEW Union made in the U.S.A.

206V 142W Open Wall Wash  
3' out from wall, 3' on center

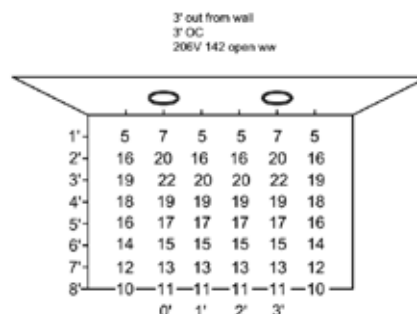

### LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **206V CFL 1 32T UNIV EB C27**

Luminaire Prefix	Light Source	Lamp Quantity	Rated Wattage	Line Voltage	Options	Field Installed Accessories
206V	CFL - Compact Fluorescent	1	13 T	UNIV - Universal	DB - Dimming Ballast*	C27 - 27" Channel Bars (pair)
		1	18 T		EB - Emergency Battery Pack	C52 - 52" Channel Bars (pair)
		1	26 T		EBHL - Emergency Battery Pack	NB - Nailer Bar Kit (set of 4)
		1	32 T		High Lumen	SCIK - Suspended Ceiling Installation Kit
		1	42 T		FUS - Fuse	(set of 4 bars and 4 grid clips)
					347 - 347 Volt Operation	

\* See Price Guide for available dimming ballasts

TYPICAL ORDER EXAMPLE: **206V CL WW E**

Reflector	Finish	Wall Wash Type	Emergency
206V	CL - Clear Semi Specular CM - Clear Matte WH - White	WW (single) DWW (double)	E - Emergency Indicator / Test Switch Mounting Hole (Use only with EB option)



Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_  
Catalog # \_\_\_\_\_

10/22/15  
© 2015  
LSI INDUSTRIES INC.